



**THE DATASHEET OF
UFW1H100MDD**



ALUMINUM ELECTROLYTIC CAPACITORS



UFW

Standard, For Audio Equipment



- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

Valued marked with an ※ in the dimension table are scheduled to be discontinued and are not recommended for new designs.

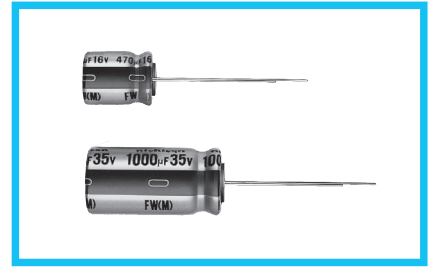


Specifications

Item	Performance Characteristics																														
Category Temperature Range	-40 to +85°C																														
Rated Voltage Range	6.3 to 100V																														
Rated Capacitance Range	33 to 22000µF																														
Capacitance Tolerance	±20% at 120Hz, 20°C																														
Leakage Current ※	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03 CV (µA) . After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV (µA).																														
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> </tr> </tbody> </table> <p>Measurement frequency : 120Hz at 20°C For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF.</p>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	tan δ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08												
Rated voltage (V)	6.3	10	16	25	35	50	63	100																							
tan δ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08																							
Stability at Low Temperature	<table border="1"> <thead> <tr> <th colspan="2">Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z(-25°C) / Z(+20°C)</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C) / Z(+20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>Measurement frequency : 120Hz</p>	Rated voltage (V)		6.3	10	16	25	35	50	63	100	Impedance ratio (max.)	Z(-25°C) / Z(+20°C)	5	4	3	2	2	2	2	2	Z(-40°C) / Z(+20°C)	12	10	8	5	4	3	3	3	
Rated voltage (V)		6.3	10	16	25	35	50	63	100																						
Impedance ratio (max.)	Z(-25°C) / Z(+20°C)	5	4	3	2	2	2	2	2																						
	Z(-40°C) / Z(+20°C)	12	10	8	5	4	3	3	3																						
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.	<table border="1"> <tbody> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </tbody> </table>	Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																							
Capacitance change	Within ±20% of the initial capacitance value																														
tan δ	200% or less than the initial specified value																														
Leakage current	Less than or equal to the initial specified value																														
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																														
Marking	Printed with black color letter on Gold sleeve.																														


※ I : Leakage Current (µA), C : Rated Capacitance (µF), V : Rated Voltage (V)

Radial Lead Type

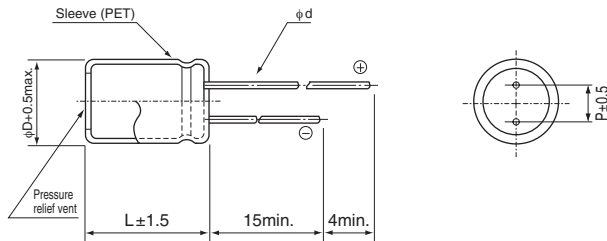

	(mm)				
φD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.6	0.8	0.8

Type numbering system (Example : 16V 330µF)

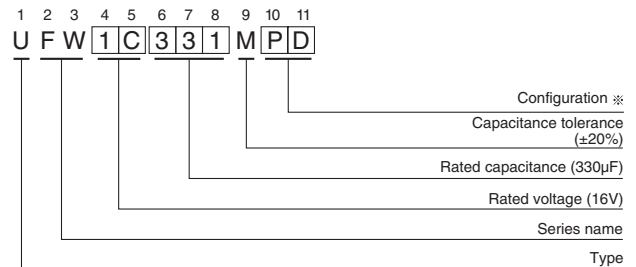

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
8 -10	PD
12.5 to 18	HD

- Please refer to the Guidelines for Aluminum Electrolytic Capacitors for end seal configuration information.

Frequency coefficient of rated ripple current

Cap.(µF)	Frequency				
33 to 47	50Hz	120Hz	300Hz	1kHz	10kHz or more
100 to 470	0.75	1.00	1.35	1.57	2.00
1000 to 22000	0.80	1.00	1.23	1.34	1.50
	0.85	1.00	1.10	1.13	1.15

●Dimension table in next page.

UFW

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A)		Rated Ripple (mArms) (85°C/120Hz)	Part Number
				at 20°C after 1 minute	at 20°C after 2 minutes		
6.3 (0J)	1000	8 \times 11.5	0.28	189	63	530	※UFW0J102MPD
	2200	10 \times 20	0.30	415.8	138.6	980	※UFW0J222MPD
	3300	10 \times 20	0.32	623.7	207.9	1170	※UFW0J332MPD
	4700	12.5 \times 20	0.34	888.3	296.1	1350	※UFW0J472MHD
	6800	12.5 \times 25	0.38	1285.2	428.4	1600	※UFW0J682MHD
	10000	16 \times 25	0.46	1890	630	2000	※UFW0J103MHD
	15000	16 \times 35.5	0.56	2835	945	2550	※UFW0J153MHD
	22000	18 \times 40	0.70	4158	1386	3200	※UFW0J223MHD
10 (1A)	1000	10 \times 12.5	0.24	300	100	630	※UFW1A102MPD
	2200	10 \times 20	0.26	660	220	1050	※UFW1A222MPD
	3300	12.5 \times 20	0.28	990	330	1420	※UFW1A332MHD
	4700	12.5 \times 25	0.30	1410	470	1800	※UFW1A472MHD
	6800	16 \times 25	0.34	2040	680	2150	※UFW1A682MHD
	10000	16 \times 35.5	0.42	3000	1000	2500	※UFW1A103MHD
	15000	18 \times 35.5	0.52	4500	1500	2720	※UFW1A153MHD
16 (1C)	330	8 \times 11.5	0.20	158.4	52.8	360	UFW1C331MPD
	470	8 \times 11.5	0.20	225.6	75.2	420	UFW1C471MPD
	1000	10 \times 16	0.20	480	160	770	UFW1C102MPD
	2200	12.5 \times 20	0.22	1056	352	1250	UFW1C222MHD
	3300	12.5 \times 25	0.24	1584	528	1700	UFW1C332MHD
	4700	16 \times 25	0.26	2256	752	2100	UFW1C472MHD
	6800	16 \times 35.5	0.30	3264	1088	2500	UFW1C682MHD
	10000	18 \times 35.5	0.38	4800	1600	2640	UFW1C103MHD
25 (1E)	220	8 \times 11.5	0.16	165	55	320	UFW1E221MPD
	330	10 \times 12.5	0.16	247.5	82.5	420	UFW1E331MPD
	470	10 \times 12.5	0.16	352.5	117.5	530	UFW1E471MPD
	1000	10 \times 20	0.16	750	250	950	UFW1E102MPD
	2200	12.5 \times 25	0.18	1650	550	1550	UFW1E222MHD
	3300	16 \times 25	0.20	2475	825	1950	UFW1E332MHD
	4700	16 \times 30.5	0.22	3525	1175	2360	UFW1E472MHD
	6800	18 \times 35.5	0.26	5100	1700	2590	UFW1E682MHD
35 (1V)	220	10 \times 12.5	0.14	231	77	370	UFW1V221MPD
	330	10 \times 12.5	0.14	346.5	115.5	470	UFW1V331MPD
	470	10 \times 16	0.14	493.5	164.5	630	UFW1V471MPD
	1000	12.5 \times 20	0.14	1050	350	1100	UFW1V102MHD
	2200	16 \times 25	0.16	2310	770	1800	UFW1V222MHD
	3300	16 \times 35.5	0.18	3465	1155	2220	UFW1V332MHD
	4700	18 \times 35.5	0.20	4935	1645	2490	UFW1V472MHD

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).
If there is no size code in the part number, please add size code "1" and then add the appropriate code.

UFW

■ Dimensions



Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A)		Rated Ripple (mArms) (85°C/120Hz)	Part Number
				at 20°C after 1 minute	at 20°C after 2 minutes		
50 (1H)	100	8 \times 11.5	0.12	150	50	250	UFW1H101MPD
	220	10 \times 12.5	0.12	330	110	410	UFW1H221MPD
	330	10 \times 16	0.12	495	165	570	UFW1H331MPD
	470	12.5 \times 20	0.12	705	235	760	UFW1H471MHD
	1000	12.5 \times 25	0.12	1500	500	1300	UFW1H102MHD
	2200	16 \times 35.5	0.14	3300	1100	2090	UFW1H222MHD
	3300	18 \times 35.5	0.16	4950	1650	2360	UFW1H332MHD
63 (1J)	100	10 \times 12.5	0.10	189	63	300	UFW1J101MPD
	220	10 \times 16	0.10	415.8	138.6	470	UFW1J221MPD
	330	10 \times 20	0.10	623.7	207.9	650	UFW1J331MPD
	470	12.5 \times 20	0.10	888.3	296.1	880	UFW1J471MHD
	1000	16 \times 25	0.10	1890	630	1300	UFW1J102MHD
	2200	18 \times 35.5	0.12	4158	1386	2200	UFW1J222MHD
100 (2A)	33	8 \times 11.5	0.08	99	33	160	UFW2A330MPD
	47	10 \times 12.5	0.08	141	47	210	UFW2A470MPD
	100	10 \times 20	0.08	300	100	350	UFW2A101MPD
	220	12.5 \times 25	0.08	660	220	600	UFW2A221MHD
	330	12.5 \times 25	0.08	990	330	750	UFW2A331MHD
	470	16 \times 25	0.08	1410	470	1000	UFW2A471MHD
	1000	18 \times 40	0.08	3000	1000	1370	UFW2A102MHD

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).
If there is no size code in the part number, please add size code "1" and then add the appropriate code.

- For formed lead or taped product specifications and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View UFW1H100MDD on WIN SOURCE](#)
-  [Nichicon Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management