





ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## 1N5400 thru 1N5408 Axial Lead Standard Recovery Silicon Rectifiers, 3 Amp, DO-201AD

**Description:**

The 1N5400 through 1N5408 silicon rectifiers are designed for use in power supplies and other applications having need of a device with the following features:

**Features:**

- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified. Single Phase, half wave, 60Hz, relative or inductive load. For capacitive load, derate current by 20%)

Peak Repetitive Reverse Voltage,  $V_{RRM}$

Working Peak Reverse Voltage,  $V_{RWM}$

DC Blocking Voltage,  $V_R$

1N5400	50V
1N5401	100V
1N5402	200V
1N5403	300V
1N5404	400V
1N5405	500V
1N5406	600V
1N5407	800V
1N5408	1000V

Maximum RMS Reverse Voltage,  $V_{R(RMS)}$

1N5400	35V
1N5401	70V
1N5402	140V
1N5403	210V
1N5404	280V
1N5405	350V
1N5406	420V
1N5407	560V
1N5408	700V

Average Rectified Current ( $T_A = +75^\circ\text{C}$  Note 1),  $I_O$  ..... 3A

Peak Forward Surge Current,  $I_{FSM}$

(Superimposed on a Rated Load, 8.3ms Single Half-Sine Wave) ..... 200A

Operating Junction Temperature Range,  $T_J$  .....  $-65^\circ$  to  $+125^\circ\text{C}$


Storage Temperature Range,  $T_{stg}$  .....  $-65^\circ$  to  $+150^\circ\text{C}$

Thermal Resistance, Junction-to-Ambient (Note 1),  $R_{thJA}$  .....  $+20^\circ\text{C/W}$

Note 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case.

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified. Single Phase, half wave, 60Hz, relative or inductive load. For capacitive load, derate current by 20%)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Peak Reverse Current	$I_{RM}$	Rated DC Blocking Voltage	$T_A = +25^\circ\text{C}$	-	-	5.0	$\mu\text{A}$
			$T_A = +100^\circ\text{C}$	-	-	100	$\mu\text{A}$
Maximum Forward Voltage	$V_{FM}$	$i_F = 3\text{A}$	-	-	1.0	V	
Junction Capacitance		$V_R = 4\text{V}, f = 1\text{MHz}$	-	30	-	pF	

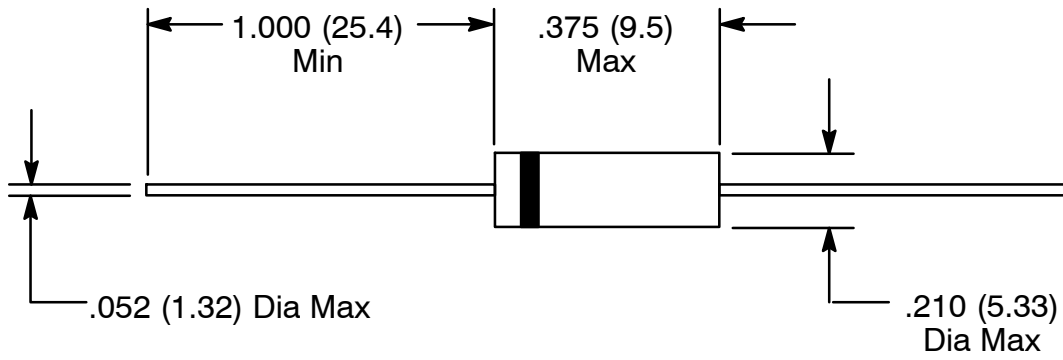

Color Band Denotes Cathode

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1N5407 on WIN SOURCE](#)

 [NTE Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management