




**THE DATASHEET OF**  
**2631**



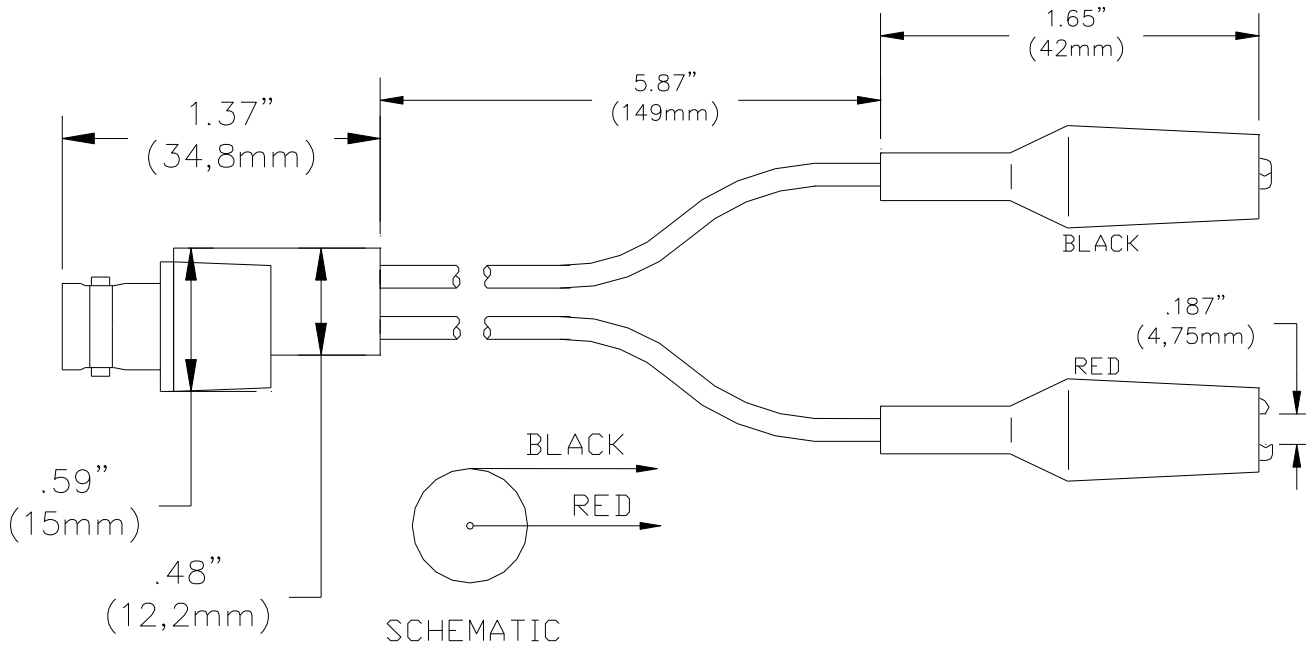

**FEATURES:**

- ✓ Converts BNC (male) cables / connectors to minigator test clips for test versatility.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.
- ✓ Minigator clips attach to terminals up to .187" (4.75mm) diameter.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

**MATERIALS:**

*BNC:* Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

*Dielectric:* PTFE

*Wire:* 20 AWG, PVC Insulated

*Minigators:* Nickel plated steel, Spring: stainless steel

*Boot:* Vinyl, color matches color of wire

**RATINGS:**

Operating Voltage: Hands free testing in controlled voltage environments: 45 VRMS Max.

Operating Temperature: +122°F (+50°C) Max.

**ORDERING INFORMATION:** Model 2631\*

\* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060



All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2631](#) on WIN SOURCE
-  [Pomona Electronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management