



**THE DATASHEET OF
AM782B1184**





ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

782 MHz Ceramic Bandpass Filter

Part Number: AM782B1184



Electrical specifications

Center Frequency: 782 MHz
Bandwidth: 5 MHz min.
VSWR: 1.7 : 1
Input / Output Impedance: 50 Ohms
Passband: 779.5-784.5 MHz
Passband Insertion Loss: 4.0 dB max
Passband Ripple:
Rejection: 25 dB min at 746–756 MHz
Rejection 2: 30 dB min at 930.6–940.3 MHz
Rejection 3: 50 dB min at 1084.2–1094.2 MHz
Power Handling: 2 W

Mechanical


Mounting Method: SMT
Dimensions: 17 x 13 x 5.5 mm

Environmental

Operating Temperature: -20°C to +70°C
Storage Temperature: -50°C to +90°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200 Hz

This product is RoHs compliant.

Outline Drawing:

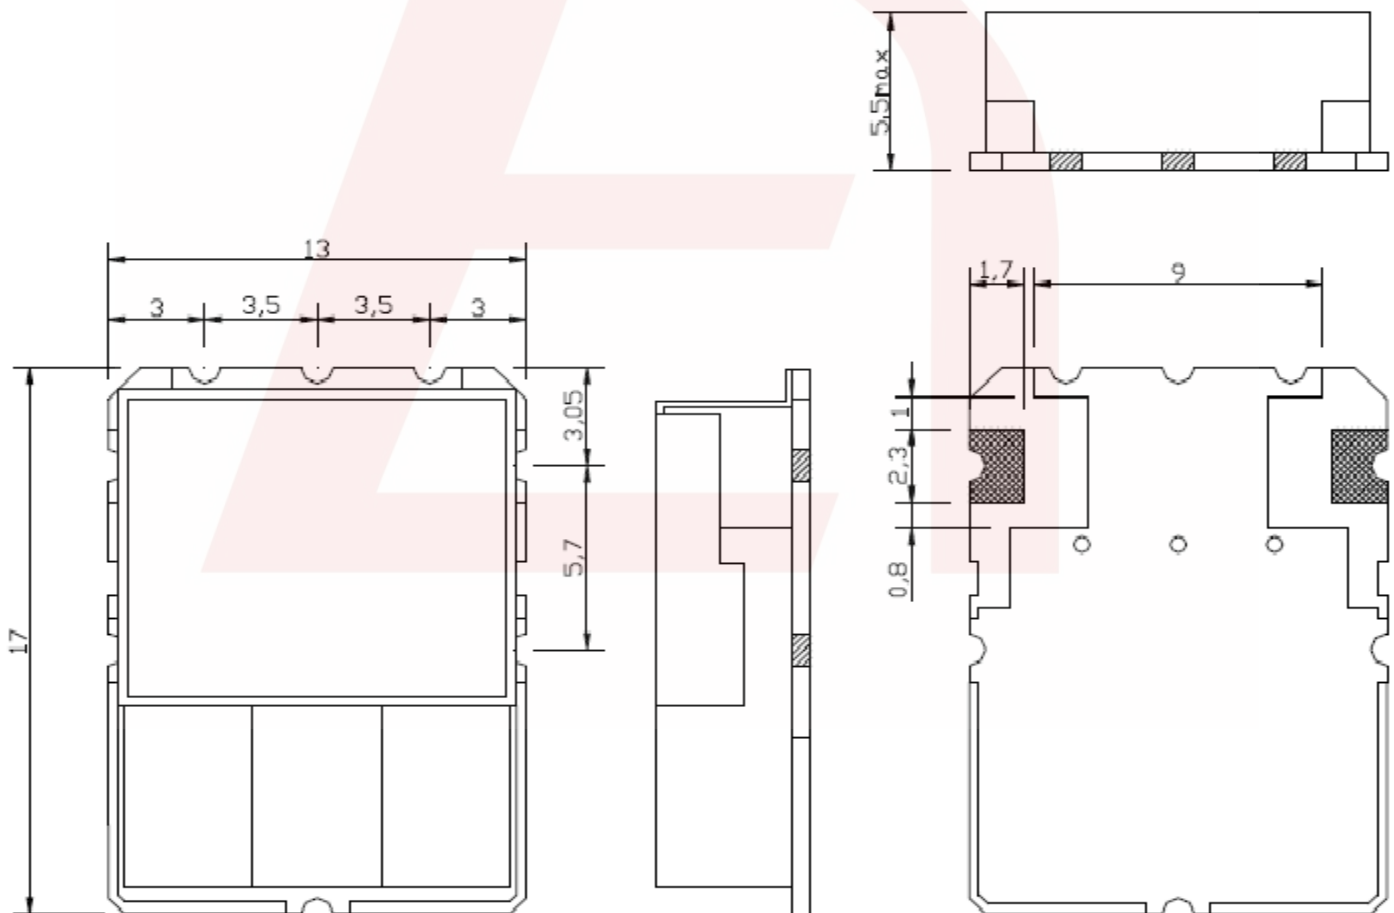

DS-B1184-02092015-Rev0




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

782 MHz Ceramic Bandpass Filter

Part Number: AM782B1184



Response Plot:

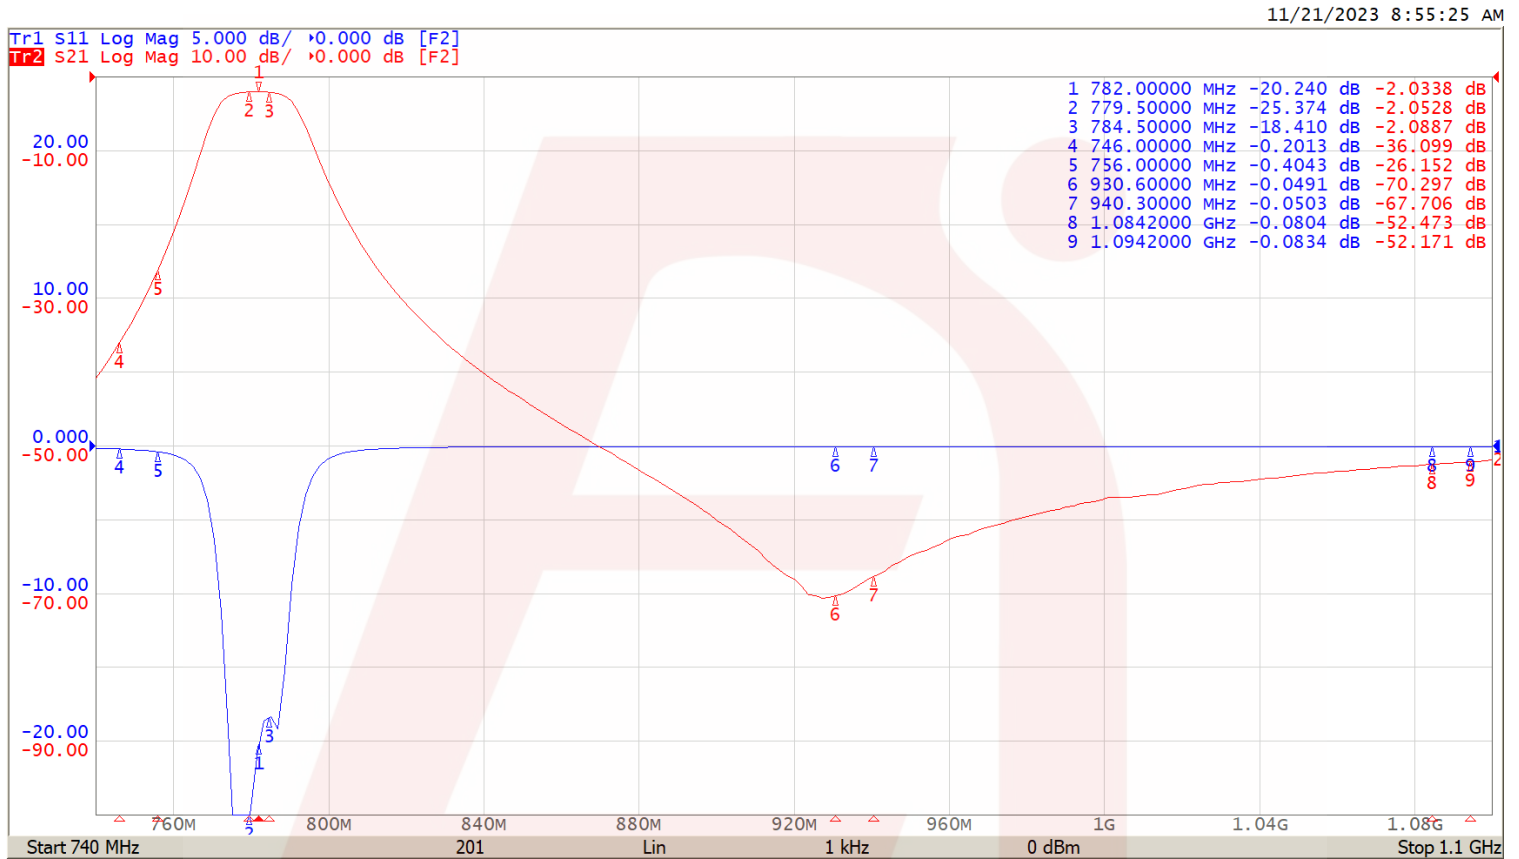

DS-B1184-02092015-Rev0

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AM782B1184 on WIN SOURCE](#)
- ⊖ [Anatech Electronics Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management