



THE DATASHEET OF
3044



“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company

Heyco® Large Dome Plugs

Mounting Hole Diameter Range from 3.000" (76,2 mm) to 6.000" (152,4 mm)

Small Packs Available

| MOUNTING HOLE DIAMETER | | PART NO. | | DESCRIPTION | PACKAGING | | PART DIMENSIONS | | | |
|---|-------|----------|-------|-------------|-----------|---------------|-----------------|-------|-----|------|
| in. | mm. | Black | White | | BULK | SMALL PACK* | A | | B | |
| | | | | | | Head Diameter | Overall Height | | | |
| | | | | | | in. | mm. | in. | mm. | |
| Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm) | | | | | | | | | | |
| 3.000 | 76,2 | 2455 | 2456 | DP 3.0 | 300 | 10† | 3.16 | 80,3 | .74 | 18,8 |
| 3.375 | 85,7 | 2482 | 2483 | DP 3.375 | 400 | 5† | 3.65 | 92,7 | .75 | 19,1 |
| 3.500 | 88,9 | 2464 | 2465 | DP 3.5 | 200 | 5† | 3.66 | 92,9 | | |
| 4.000 | 101,6 | 2473 | 2474 | DP 4.0 | 300 | 5† | 4.17 | 105,8 | .71 | 18,0 |
| 5.000 | 127,0 | 2451 | 2452 | DP 5.0 | 150 | 1 | 5.24 | 133,0 | .75 | 19,1 |
| 6.000 | 152,4 | 2453 | 2454 | DP 6.0 | 130 | 1 | 6.22 | 157,9 | .78 | 19,8 |

Standard colors black and white. Consult Heyco for other colors.

*To order Small Packs, please add the suffix -P to Part No., e.g., 2455-P

† White Small Pack quantity is 1 piece.



Heyco® Thick Panel Dome Plugs

Mounting Hole Diameter Range: .375" (9,5 mm) to 2.000" (50,8 mm)

| MOUNTING HOLE DIAMETER | | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|---|-------------|----------|-------|---------------|-----------------|----------------|-----|------|
| in. | mm. | Black | White | | A | | B | |
| | | | | | Head Diameter | Overall Height | | |
| | | | | | in. | mm. | in. | mm. |
| Single Locking Step for Panel Thickness up to .172" (4,4 mm) | | | | | | | | |
| .375 | 9,5 | 2624† | 2625† | DPT 375 | .47 | 11,9 | .41 | 10,3 |
| Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm) | | | | | | | | |
| .500 | 12,7 | 3004 | 3005 | DPT 500 | .57 | 14,5 | .56 | 14,3 |
| .625 | 15,9 | 3006 | 3007 | DPT 625 * | .73 | 18,5 | .52 | 13,2 |
| .750 | 19,1 | 3008 | 3009 | DPT 750 * | .92 | 23,4 | | |
| .812 | 19,6 | 2667 | 2668 | DPT 812-500** | 1.02 | 25,9 | .88 | 22,4 |
| .875 | 22,2 | 3044 | 3045 | DPT 875 | 1.02 | 25,9 | .56 | 14,3 |
| 1.000 | 25,4 | 3046 | 3047 | DPT 1000 | 1.20 | 30,5 | | |
| 1.093 - 1.125 | 27,8 - 28,6 | 3018 | 3019 | DPT 1093 | 1.22 | 31,0 | | |
| 1.187 | 30,1 | 3100 | 3101 | DPT 1187 | 1.31 | 33,3 | | |
| 1.250 | 31,8 | 3102 | 3103 | DPT 1250 | 1.38 | 35,1 | | |
| 1.375 | 34,9 | 3106 | 3107 | DPT 1375 | 1.50 | 38,1 | | |
| 1.500 | 38,1 | 3048 | 3049 | DPT 1500 | 1.67 | 42,4 | | |
| 1.750 | 44,5 | 3027 | 3028 | DPT 1750 | 1.91 | 48,5 | | |
| 2.000 | 50,8 | 3050 | 3051 | DPT 2000 | 2.17 | 55,1 | | |

Standard color black. Consult Heyco for other colors.


*Single locking step for panel thickness up to .250" (6,4 mm).

**For Panel Thickness from .20" (5,1 mm) to .50" (12,7 mm). AKA Whistle-free Plug.

† Not UL Certified.



- For use in panels thicker than .125" (3,2 mm).
- Close unneeded panel holes and electrical knock-outs.
- Locking fingers snap into holes with fingertip pressure for quick and easy installation.
- Convex, matte finish head tapers to a thin edge.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.000" (50,8 mm) diameter holes for panel thickness up to .250" (6,4 mm).
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.

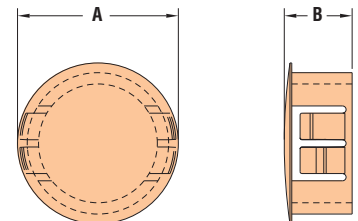

Quick Specs

| | |
|---------------------|---|
| Material | Nylon 6/6 |
| Certifications | Recognized under the Component Program of Underwriters' Laboratories, File E51579 (Thick Panel Dome Plugs only) Certified by Canadian Standards Association, File 8919 |
| Flammability Rating | 94V-2 |
| Temperature Range | -40°F (-40°C) to 221°F (105°C) |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 3044 on WIN SOURCE](#)
-  [Heyco Products Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management