



# THE DATASHEET OF 3541



## MIDGET, SPF (5AG) FUSE HOLDER

- Designed for SPF (Solar Protection Fuse)
- Optional cover will protect and insulate fuse
- Flame resistant

### SPECIFICATIONS


**Base & Cover:** Nylon 46, UL Rated 94V-0  
**Clips:** .030 (.76) Brass, Matte Tin Plate

**UL Rated:** 30 Amps @ 500 VAC

**UL Operating Temp. Range:** -58°F to +292°F (-50°C to




3576 (THM)






Optional Cover **Cat. No. 3576C**  
fits Cat. No. 3576 & 3574

#### Mounting Detail



#### Mounting Detail



3574 (SMT)



**CAT. NO. 3576 - Holder**

**CAT. NO. 3576C - Cover only**

**CAT. NO. 3574 - Holder**



**CAT. NO. 3576C - Cover only**

## 3AG FUSE BLOCKS

- Available with fiberglass or phenolic base
- Fuse clips riveted to base for rugged applications

### SPECIFICATIONS

**Phenolic Base:** XP, Black UL Rated 94-HB  
**Fiberglass Base:** GPO-3 UL Rated 94 V-0  
**Clips:** .020 (.51) Brass - Nickel Plated  
**Rated:** 15 Amps @ 500 VAC  
**Operating Temp. Range:** -58°F to +292°F (-50°C to +145°C)

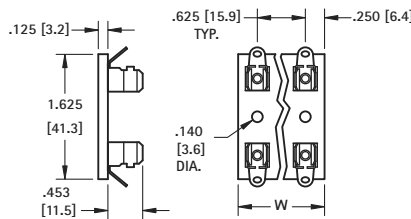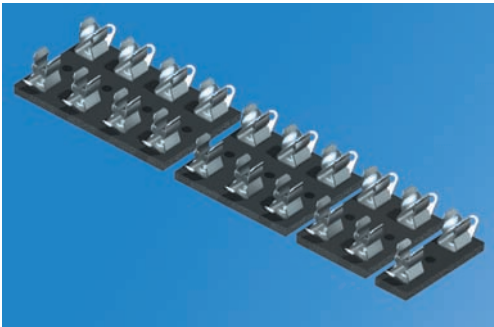

BLACK PHENOLIC	FIBER-GLASS	HOLDS NO. OF FUSES	W
<b>CAT. NO.</b>	<b>CAT. NO.</b>		
<b>3536*</b>	<b>3540*</b>	1	.500 (12.7)
<b>3537*</b>	<b>3541*</b>	2	1.125 (28.6)
<b>3538*</b>	<b>3542*</b>	3	1.750 (44.5)
<b>3539*</b>	<b>3543*</b>	4	2.375 (60.3)

## FUSE COVERS



- Made from flame retardant material
- Protects fuse from shorting and minor bumps



Can be used with clips 3512, 3512P, 3517 and 3518

**MATERIAL:** ABS, UL Rated 94V-0

CAT. NO.	FUSE SIZE
<b>3517C</b>	5mm x 20mm



Can be used with clips or fuse holders

**MATERIAL:** PVC, UL Listed 94V-0

CAT. NO.	FUSE SIZE	L	W	H
<b>3527C</b>	5mm x 20mm	.945 (24.0)	.314 (8.0)	.512 (13.0)
<b>3521C</b>	2AG	.787 (20.0)	.295 (7.5)	.452 (11.5)
<b>4245C</b>	3AG	1.319 (33.5)	.472 (12.0)	.591 (15.0)

## SUBMINIATURE FUSE HOLDERS

- Reliable spring tension assures low contact resistance
- Fuse holders allow for quick changing of subminiature fuses
- Ideal for high density circuit board applications

### SPECIFICATIONS

**Base:** Thermoplastic, UL Rated 94V-0  
**Springs:** Beryllium Copper, Gold Plate


**Pins:** Brass, Tin Plate  
**Current Rating:** 5 Amps @ 250V AC




**.335 (8.5) x .158 (4.0) FUSE**  
For Littelfuse 392/395 Type TE5<sup>®</sup>  
Bussmann: PC Series or equivalent




**.335 (8.5) DIA. FUSE**  
For Littelfuse 370 Type TR5<sup>®</sup>  
Bussmann: BK-EFF Series or equivalent




**CAT. NO. 3552\***



**CAT. NO. 3553\***

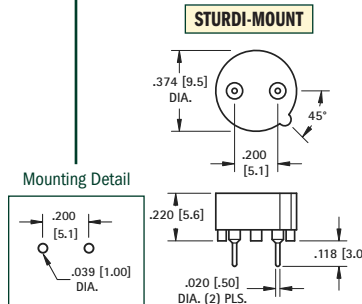

**CAT. NO. 3556\***




**CAT. NO. 3554\***

\*3AG Fuse Blocks & Subminiature Fuse Holders are not UL recognized

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 3541](#) on WIN SOURCE
-  [Keystone Electronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management