



**THE DATASHEET OF
ACH-25.000MHZ-EK**



HALF SIZE DIP LOW VOLTAGE 5.0V CRYSTAL CLOCK OSCILLATOR



12.7 x 12.7 x 5.6mm

ACH Series



Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable

FEATURES:

- Wide frequency range.
- HCMOS and TTL compatible.
- Tight symmetry option.
- Tri-state Enable / Disable function.

APPLICATIONS:

- Microprocessors.
- Digital circuit.

STANDARD SPECIFICATIONS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.032768		200.000	MHz	
Operating Temperature		0		+70	°C	See options
Storage Temperature		-55		+125	°C	
Overall Frequency Stability		-100		+100	ppm	See options
Supply Voltage (Vdd)		4.5	5.0	5.5	V	
Input Current	32.768kHz ~ 23.999MHz			30	mA	
	24.000MHz ~ 49.999MHz			45		
	50.000MHz ~ 79.999MHz			70		
	80.000MHz ~ 200.999MHz			85		
Symmetry (@ 1/2Vdd)	32.768kHz ~ 49.999MHz	45		55	%	See options
	50.000MHz ~ 200.000MHz	40		60		
Rise and Fall Time (Tr/Tf)	32.768kHz ~ 1.999MHz			40	ns	
	2.000MHz ~ 24.000MHz			10		
	24.001MHz ~ 200.000MHz			5		
Output Load	32.768kHz ~ 79.999MHz			15	pF	See options
				10	TTL	
	80.000MHz ~ 200.000MHz			15	pF	
				5	TTL	
Output Voltage	VOH	0.9*Vdd			V	
	VOL			0.1*Vdd	V	
Tri-state Function	VIH	2.2			V	"1" or Open: Oscillation
	VIL			0.8	V	"0": Output disable (Hi Z)
Output Enable time				4	ms	For option A only
Output Disable time				100	ns	For option A only
Start-up Time			1	10	ms	

* Overall frequency stability includes initial tolerance and temperature stability.

HALF SIZE DIP LOW VOLTAGE 5.0V CRYSTAL CLOCK OSCILLATOR




12.7 x 12.7 x 5.6mm

ACH Series


RoHS/RoHS II Compliant

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

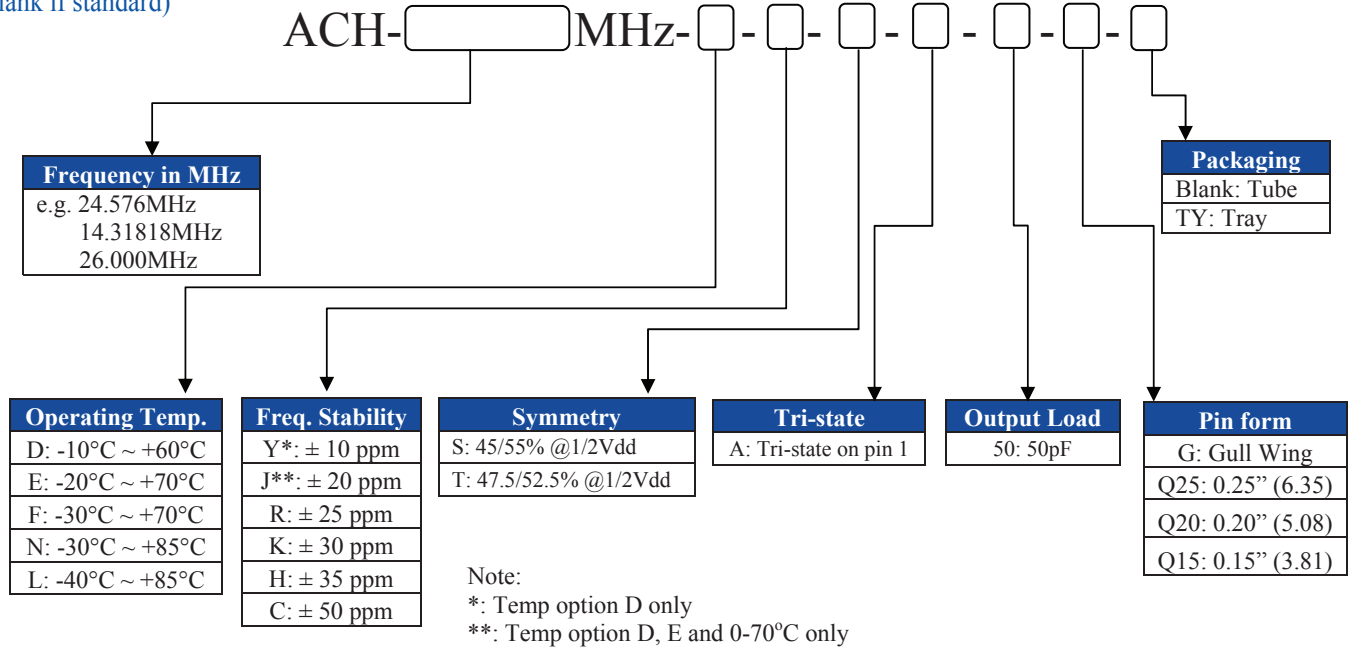

OUTLINE DIMENSION:

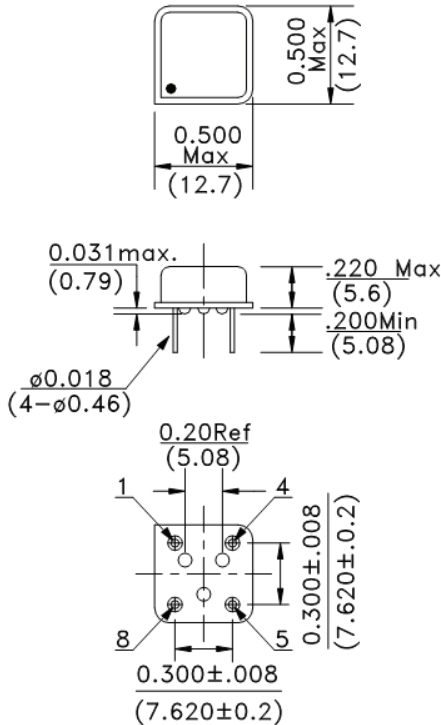

Pin	Function
1	Tri-State/NC
4	Case GND
5	Output
8	Vdd

Dimensions: inches (mm)

Packaging: 40pcs /tube

ATTENTION: Abracon products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon is required. Please contact Abracon for more information.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View ACH-25.000MHZ-EK on WIN SOURCE](#)
- ⊖ [Abracon LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management