



**THE DATASHEET OF  
ADC-6-10-75+**



# Surface Mount Directional Coupler

## ADC-6-10-75+

75Ω 20 to 1000 MHz

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
75Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

### Outline Drawing

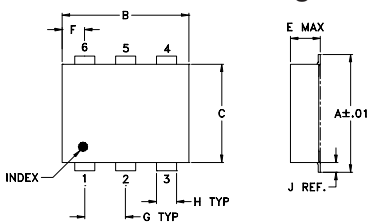

### PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

### Demo Board MCL P/N: TB-08 Suggested PCB Layout (PL-042)

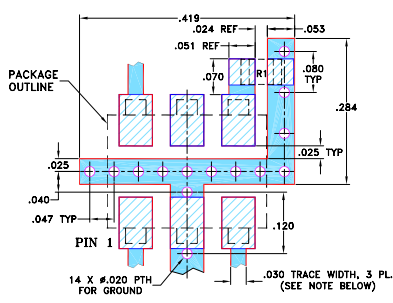

- RESISTOR R1: 75 Ohm, 0805 SIZE.
- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
    - Denotes PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
    - Denotes COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wideband, 20 to 1000 MHz
- low mainline loss, 2.1 dB typ.
- excellent coupling flatness, ±0.15 typ.
- aqueous washable
- protected by U.S. Patents 6,133,525 & 6,140,887

### Applications

- cable tv



Generic photo used for illustration purposes only  
CASE STYLE: CD542

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)			DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W							
	Nom.	Flatness	L Typ.	M Max.	U Typ.	L Typ. Min.	M Typ. Min.	U Typ. Min.		L Max.	MU Max.						
f <sub>L</sub> -f <sub>U</sub>																	
20-1000	6.6±0.5	±0.5	2.1	2.8	2.1	2.5	2.2	2.8	15	12	15	12	15	9	1.33	0.5	0.5


L= 20-200 MHz M= 200-500 MHz U= 500-1000 MHz

1. Mainline loss includes theoretical power loss at coupled port.


### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
18.00	2.12	6.65	15.82	15.10	36.74	15.09
50.00	2.14	6.66	15.80	15.28	49.03	15.44
100.00	2.14	6.70	15.73	15.50	38.41	15.43
300.00	2.09	6.72	15.71	17.25	27.75	16.06
500.00	2.11	6.53	15.84	20.57	24.15	19.74
600.00	2.16	6.48	15.88	22.66	23.38	17.89
700.00	2.23	6.51	15.88	24.28	23.33	18.52
800.00	2.27	6.61	15.59	24.45	23.80	22.73
900.00	2.25	6.67	14.91	24.18	24.25	21.44
1000.00	2.26	6.70	13.81	24.01	23.70	19.57


### ADC-6-10-75+ INSERTION LOSS

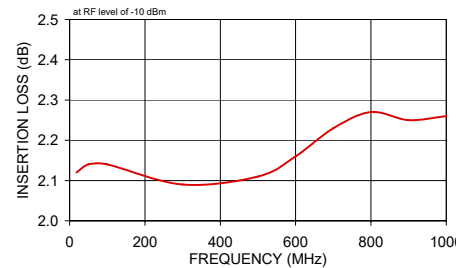


### ADC-6-10-75+ COUPLING & DIRECTIVITY

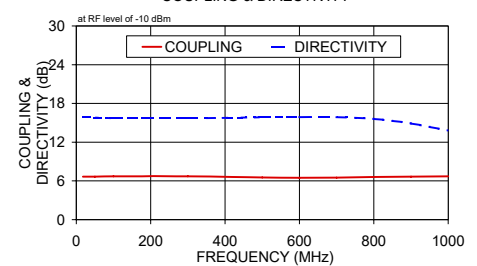

### ADC-6-10-75+ RETURN LOSS

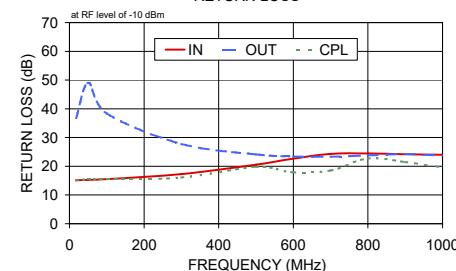

### Electrical Schematic

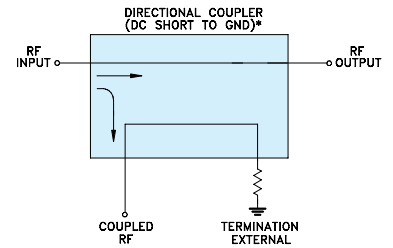



\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ADC-6-10-75+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management