



# SMD kHz Crystals 3.2 x 1.5 x 0.75 mm AH Series

## Features

- 2 pads surface mount package.
- High reliable environmental performance.
- RoHS compliant /Pb Free.
- AECQ200 Certified for automotive RTC applications.




## Electrical Specifications

Item / Type	AH
Norminal Frequency	32.768 kHz
Frequency Tolerance(at 25 °C)	± 20 ppm , or specify
Operation Temperature Range	- 40 ~ + 85 °C
Shunt Capacitance (C0)	1.5pF typical
Motional Capacitance (C1)	6.7fF typical
Insulation Resistance (IR)	500 MΩ Min.
Drive Level (DL)	0.5 μW Max.
Load Capacitance( CL)	7.0 pF , 9 pF , or 12.5 pF
Turnover Temperature (Ti)	25 °C ± 5 °C
Parabolic Coefficient (B)	( - 0.03 ± 0.01 ) * 10 <sup>-6</sup> / °C <sup>2</sup>
Aging (at 25 °C)	± 3 ppm at first year
Storage Temperature Range	- 55 ~ +125 °C

## Equivalent Series Resistance(ESR)

AH  
 70 KΩ Max

## Dimensions

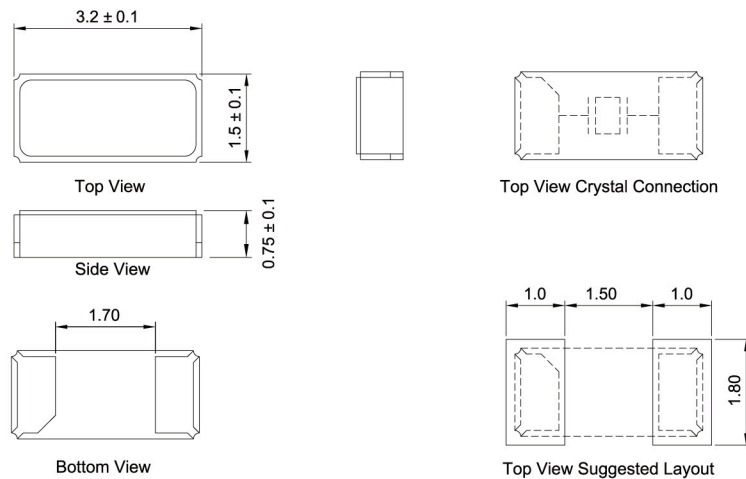

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View AH03200003](#) on WIN SOURCE

 [TXC CORPORATION](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management