




**THE DATASHEET OF
AQW225NAZ**





**RF (Radio Frequency) Type
[2-Channel (Form A) Type]
—Low On resistance—**

**PhotoMOS
RELAYS**

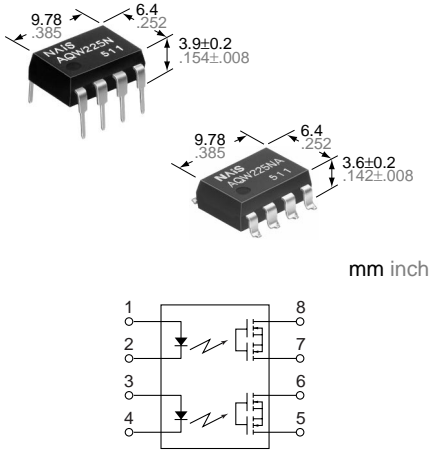

2. Applicable for 2 Form A use as well as two independent 1 Form A use

3. Compact 8-pin DIP size
The device comes in a compact (W) 6.4×(L) 9.78×(H) 3.9 mm (W) .252×(L) .385×(H) .154 inch, 8-pin DIP size (through hole terminal type).

4. Low capacitance between output terminals ensures high response speed:
The capacitance between output terminals is small, typically 10 pF. This enables for a fast operation speed of 200 μs.

5. High sensitivity and low On resistance:
Maximum 0.16 A of load current can be controlled with input current of 5 mA (AQW225N). The 10 Ω On resistance is less than our conventional models. With no metallic contacts, the PhotoMOS relay has stable switching characteristics.

6. Low-level off state leakage current:
The SSR has an off state leakage current of several milliamperes, whereas the PhotoMOS relay has only 30 pA even with the rated load voltage of 80 V (AQW225N).

7. Controls low-level analog signals:
PhotoMOS relay features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

8. Low terminals electromotive force:
(approx. 1 μV)

FEATURES

1. PhotoMOS relay 2-channels (Form A) type with high response speed, low leakage current and low On resistance.

TYPICAL APPLICATIONS

- Measuring equipment
- Scanner, IC checker, Board tester

TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
AC/DC type	80 V	120 mA	AQW225N	AQW225NA	AQW225NAX	AQW225NAZ		
	200 V	50 mA	AQW227N	AQW227NA	AQW227NAX	AQW227NAZ		
	400 V	40 mA	AQW224N	AQW224NA	AQW224NAX	AQW224NAZ		

*Indicate the peak AC and DC values.
Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW225N(A)	AQW227N(A)	AQW224N(A)	Remarks
Input	LED forward current	I _F	50 mA			
	LED reverse voltage	V _R	3 V			
	Peak forward current	I _{FP}	1 A			f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW			
Output	Load voltage (peak AC)	V _L	80 V	200 V	400 V	
	Continuous load current	I _L	0.12 A (0.16 A)	0.05 A (0.07 A)	0.04 A (0.05 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I _{peak}	0.36 A	0.15 A	0.12 A	A connection: 100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	800 mW			
Total power dissipation		P _T	850 mW			
I/O isolation voltage		V _{iso}	1,500 V AC			
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F			Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F			

AQW220N


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW225N(A)	AQW227N(A)	AQW224N(A)	Remarks
Input	LED operate current	Typical	I _{Fon}	0.9 mA			I _L = Max.
		Maximum		3.0 mA			
	LED turn off current	Minimum	I _{Foff}	0.4 mA			I _L = Max.
		Typical		0.8 mA			
	LED dropout voltage	Typical	V _F	1.14 V (1.25 V at I _F = 50 mA)			I _F = 5 mA
		Maximum		1.5 V			
Output	On resistance	Typical	R _{on}	7 Ω	30 Ω	70 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum		10 Ω	50 Ω	100 Ω	
	Output capacitance	Typical	C _{out}	10 pF			I _F = 0 V _B = 0 f = 1 MHz
		Maximum		15 pF			
	Off state leakage current	Maximum	I _{leak}	10 nA			I _F = 0 V _L = Max.
	Transfer characteristics	Switching speed	Turn on time*	Typical	0.20 ms		
Maximum				0.5 ms			I _L = Max.
Turn off time*			Typical	0.08 ms			I _F = 5 mA
			Maximum	0.2 ms			I _L = Max.
I/O capacitance		Typical	C _{iso}	0.8 pF			f = 1 MHz
		Maximum		1.5 pF			V _B = 0
Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ			500 V DC	

Note: Recommendable LED forward current I_F = 5mA.

For type of connection, see page 32.


*Turn on/Turn off time

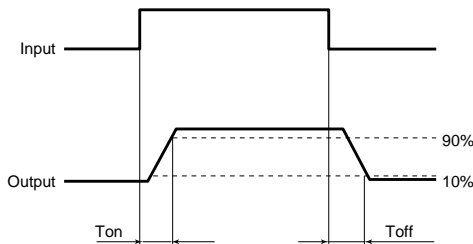

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

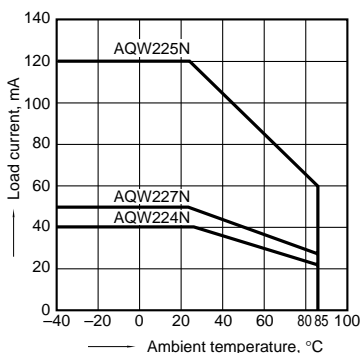


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

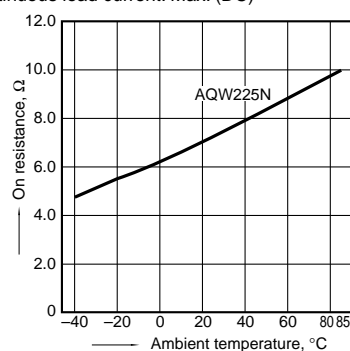


2.-(2) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

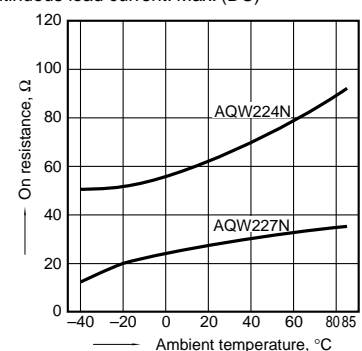


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

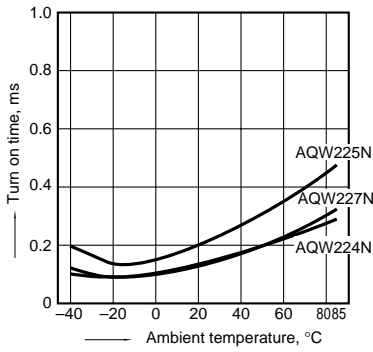


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

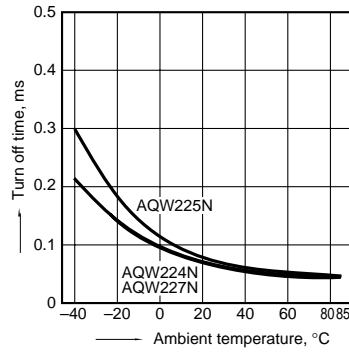


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

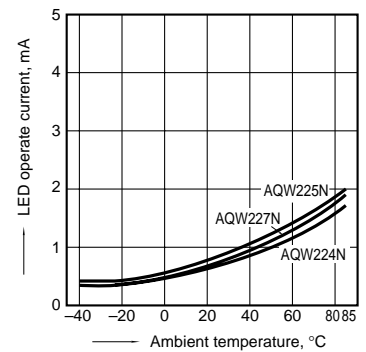


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

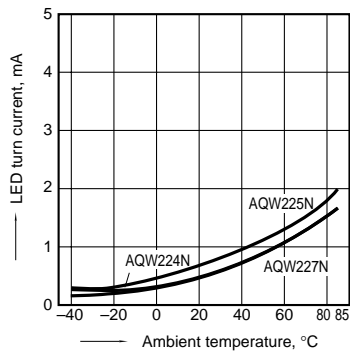


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

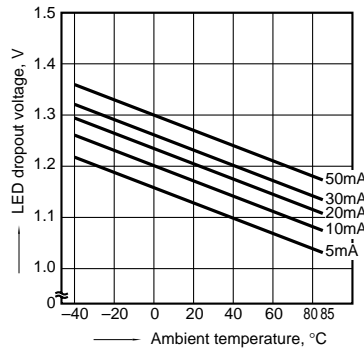


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

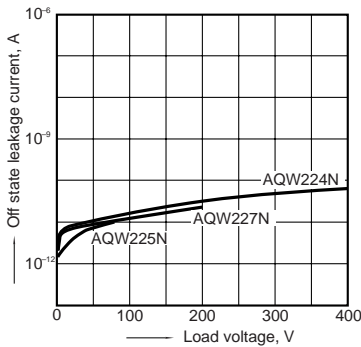


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

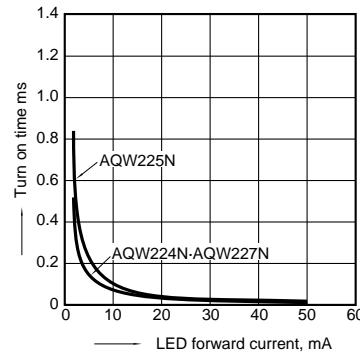


11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

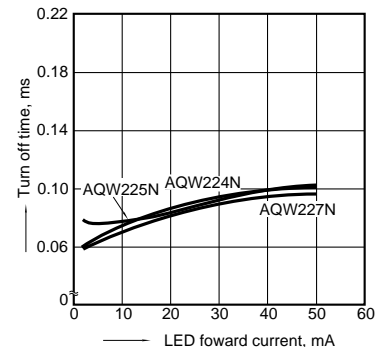


12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F




13. Isolation characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

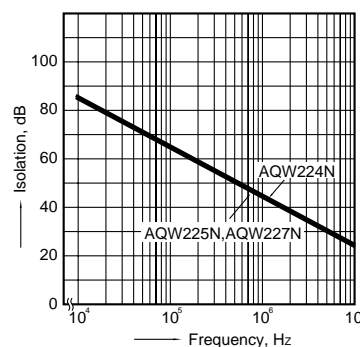

14. Insertion loss characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

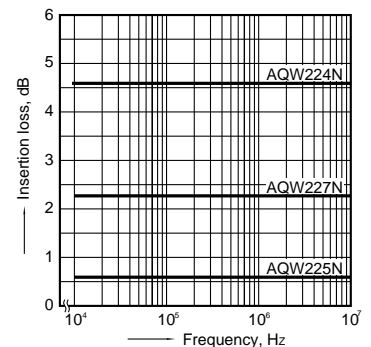

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View AQW225NAZ on WIN SOURCE](#)

 [Panasonic Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management