



**THE DATASHEET OF
AM2700B1214**





ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2700 MHz Ceramic Band Pass Filter

Part Number: AM2700B1214



Electrical specifications

Center Frequency: 2700 MHz
Bandwidth: 50 MHz
VSWR: 16 dB min.
Input / Output Impedance: 50 Ohms
Passband: 2675-2725 MHz
Passband Insertion Loss: 2.0 dB max.
Passband Ripple: 0.5 dB max.
Rejection: 70 dBc min at 2450 MHz
Power Handling: 3 Watt

Mechanical


Mounting Method: SMT
Dimensions: 32 x 17 x 7.5 mm

Environmental

Operating Temperature: -30°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

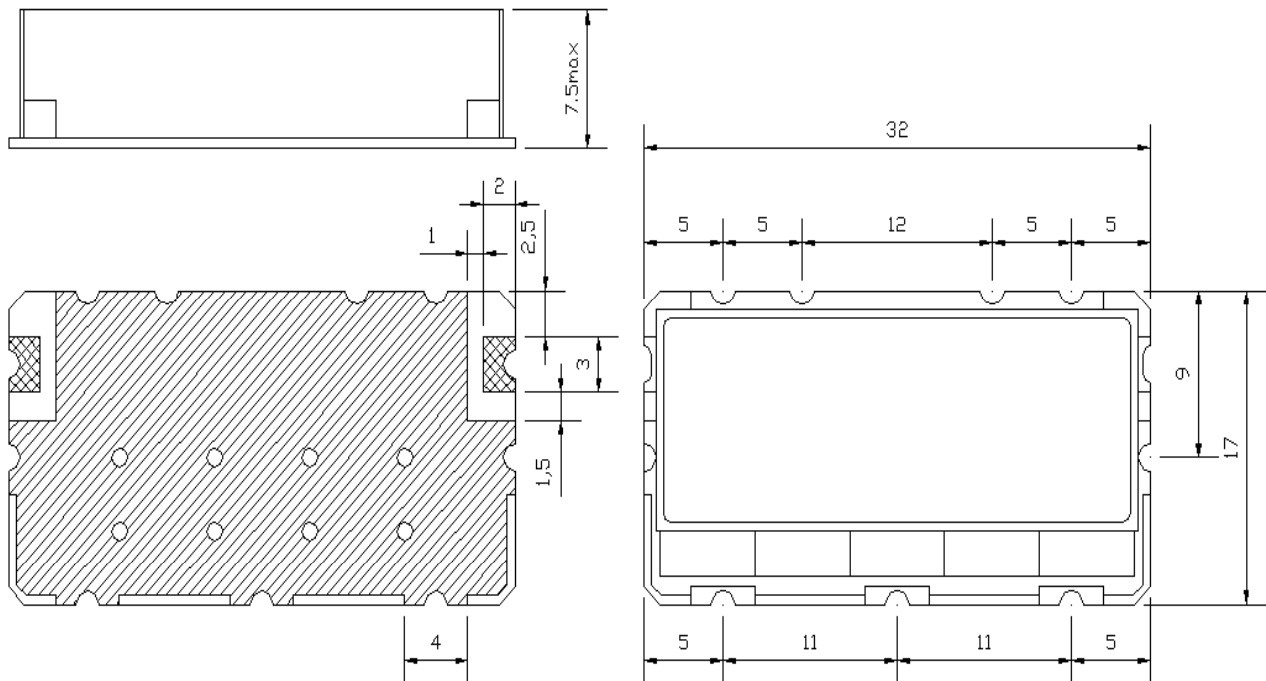

Unit:mm
Tolerance:±0,3

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AM2700B1214 on WIN SOURCE](#)
- ⊖ [Anatech Electronics Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management