


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	50-00130	Connector, dc plug, 5.5x2.5xL22.5 mm, molding style, brass nickel plated	1
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1
3	24-00043	Overmold, PVC, black	1

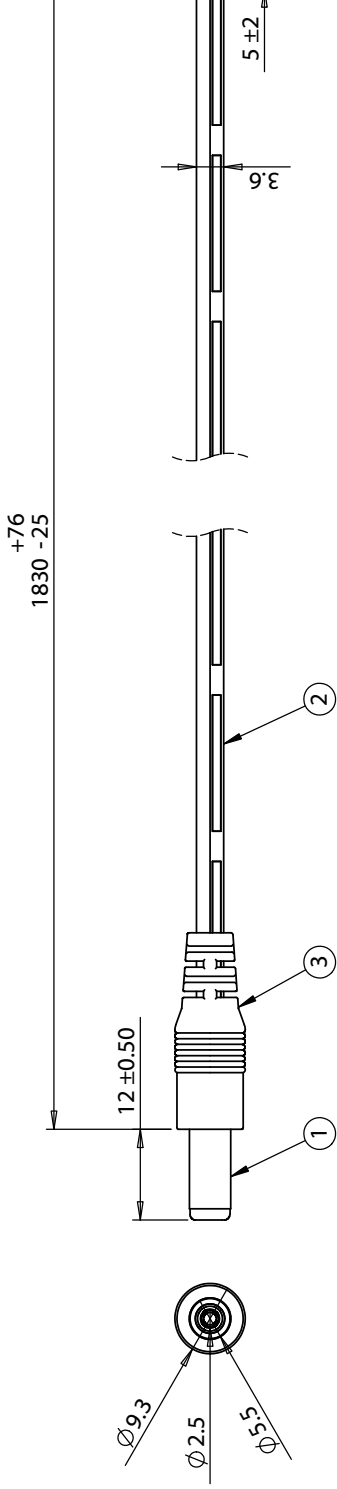

Revision:	Date:	Description:
A	1/19/2009	Re-issue CUI spec as Tensility
A1	1/15/2009	Updated tolerances
A2	8/30/2011	Updated description, connector, and wire information
A3	1/9/2014	Updated description

Prepared: **GL**
2016.03.10
09:32:14
-0800'

Verified: **LA**
DATE PREPARED, DATE VERIFIED, TIME, AND USER ID ARE IN LOCAL TIME ZONE

Dimensions are in millimeters.
 Tolerances:
 X: ± 0.5 mm
 XX: ± 0.3 mm
 XXX: ± 0.05 mm

Notes:
 RoHS compliant
 Function test: no open, no short circuit, no intermittent
 Description:
 Cable, 1830 mm, 5.5x2.5x12 mm, 50-00130 dc plug to stripped tinned, 24 AWG, 30-00003 wire

TE
 tel 1.5
 fax 1.5
 Size: Part
 A 05
 Scale: 1:

5 4 3 2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CA-2184 on WIN SOURCE](#)
- ⊖ [Tensility International Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management