




**THE DATASHEET OF
CA-2185**



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	50-00126	Connector, dc plug, 5.5x2.1xL22.5 mm, brass nickel plated	1
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1
3	24-00043	Overmold, PVC, black	1

+76
1830 - 25

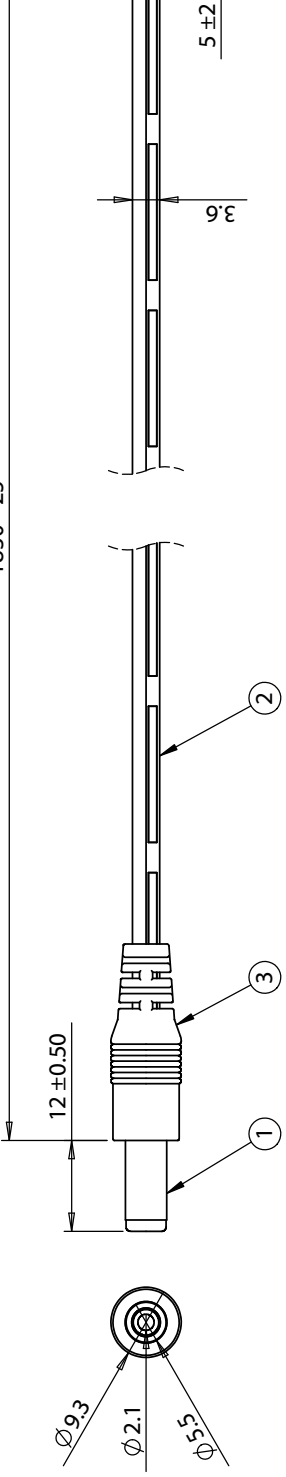

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Revision:	Date:	Description:	Prepared:	Verified:	Notes:
A	1/19/2009	Re-issue CUI spec as Tensility	2016.03.10 GL 09:30:00 -08'00'	LA Dimensions are in millimeters.	RoHS compliant
A1	12/7/2010	Upgraded rating and added wire part number			Function test: no open, no short circuit, no intermittent
A2	8/30/2011	Updated description, connector, and wire information			Description:
A3	9/10/2013	Corrected cable rating			Cable, 1830 mm, 5.5x2.1x12 mm, 50-00126 dc plug to stripped tinned leads, 24 AWG, 30-00003 wire
					Scale: 1:1

TE

tel 1.5
fax 1.5

Size: Part
A 05

Scale: 1:1

5 4 3 2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CA-2185 on WIN SOURCE](#)
- ⊖ [Tensility International Corp](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management