



TABLE 1 WIRE CRIMP SIZE		PART NO. AND CH. CODE	C	V	W1	W2	H1	H2	APPLICABLE WIRE SIZE (INSULATION DIAMETER: φ0.91~φ1.90)
S	7116-4415-02, C	ETC.	3.0	1.9	1.49	2.82	1.82	2.84	(JASO) 0.3 (ISO) 0.22~0.35
M	7116-4416-02, C	(7B16-4416-02, C)	3.0	1.9	1.82	2.94	2.20	3.13	(JASO) 0.5 (ISO) 0.5
L	7116-4417-02, C	ETC.	SEE DWG	1.65	1.96	3.10	2.55	3.53	(JASO) 0.85 (ISO) 0.75


△ **DETAIL OF CONDUCTOR BARREL**
(7116-4417-02)
(7116-4417-08)
(7116-4489-08)



△ **GOLD FLASH PLATING**
Au フラッシュ めっき
7116-4487-08
7116-4488-08
7116-4489-08


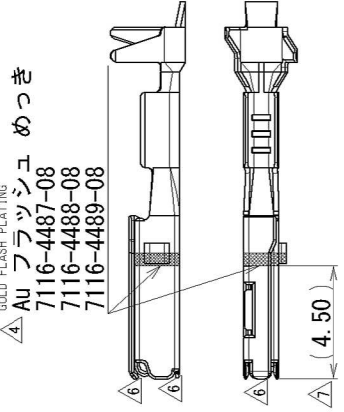


△ **GOLD FLASH PLATING**
Au フラッシュ めっき
7116-4415-08
7116-4416-08
7116-4417-08

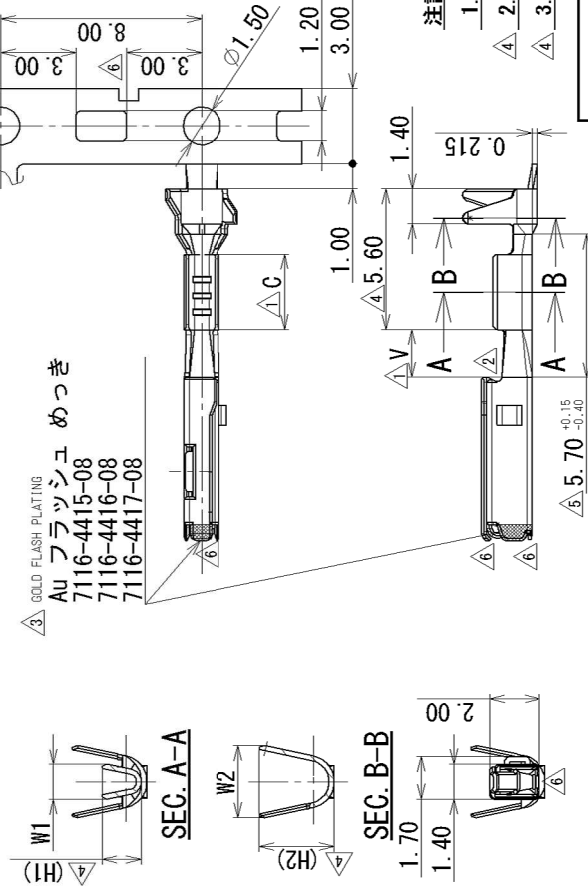

SEC. A-A

SEC. B-B



NOTES

1. MALE TERMINAL PART NO. : 7114-4415-02, -4416-02, -4417-02
2. APPLICABLE WIRE SEAL PART NO. : 7158-3165-90, -3166-60, -3167-80, -3168-80, -3182-20
3. PART NUMBERS IN PARENTHESIS SHALL BE USED FOR AIR BAG(A/B) CIRCUITS AND OTHER CIRCUITS DESIGNATED FOR SPECIAL CONTROL.

注記

1. かん合端子品番 : 7114-4415-02, -4416-02, -4417-02
2. 適用ゴム栓品番 : 7158-3165-90, -3166-60, -3167-80, -3168-80, -3182-20
3. ()内の品番はA/B回路及び特別管理回路に使用すること。

DATE	REVISION RECORD	NO.	CHKD	REVISION
2015/11/25	CHANGED DIMENSION	C15-Z542	S. P	
2006/03/30	CHANGE FORM. ETC.	C06-Z314	S. K	
2004/11/22	ADDED TOLERANCE	C04-ZF29	Y. I	
2003/12/11	ADDED GOLD PLATING ETC.	C03-X787	H. Y	
2002/09/23	ADDED PART NO. ETC.	C02-Y003	H. Y	
2002/06/05	REVISED FORM. ETC.	C02-X502	T. Y	
2001/10/30	CHANGED DIMENSION	C01-Y113	H. Y	
2001/09/04	NEW	C01-X871	H. Y	

GENERAL TOLERANCE

ITEM	50MAX	100MAX	250OVR	500OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'
C	±0.3	±0.5	±0.8	±1.4	±2	±30'

GENERAL TOLERANCE

ITEM	10 MAX	50 MAX	100 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±0.2	±0.3	±0.5	±3°	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±0.2	±0.3	±2.5	±3°	0.1
C	±0.3	±0.5	±0.8	±1.4	±2	±0.2	±0.3	±2.5	±3°	0.15

CUSTOMER
CUSTOMER PART NO.

CUSTOMER DWG NO.

OFFICE

VENDOR

VENDOR NO.

MATL.
SPEC.

NAME

RH TYPE TERMINAL FEMALE

TREAT.
& FIN.

SEE TABLE 2

DWG DATE

DWG SOURCE

UNIT

SQ. ANGLE

2001/09/04

NEW

mm

5:1 3

APPROVED

CHECKED

DESIGN

DRAWN

T. YAMAWAKI

MURAKAMI

YOSHIDA

S. PEREZ

2015/11/25

2001/08/06

2015/11/25

g

MASS

±30'

±30'

±30'

±0.15

±0.2

±0.3

±0.5

±0.75

±1.4

±2

±30'

0.1

0.1

0.15

±3°

±3°

±3°

0.1

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

0.15

±3°

±3°

±3°

0.15

0.1

0.1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View USB-TYPE-C-020 on WIN SOURCE](#)
- [DEALON Precision Industry Co., Ltd Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management