



THE DATASHEET OF E2457NLT





3

2

1

FINAL OUTLINE NOTES:
CHECK DIMENSIONS PER PACKAGE SPECIFICATION ITEM 10.

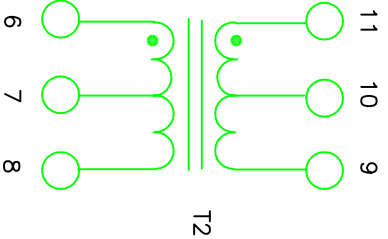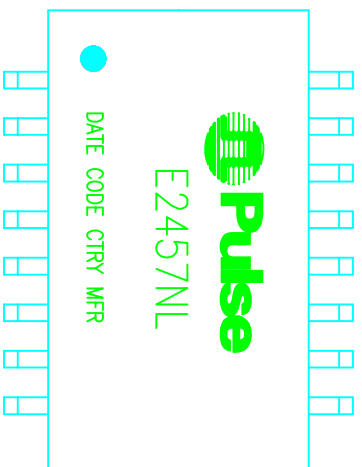

Electrical @ 25°C

PARAMETER	SPECIFICATIONS
TURNS RATIO	(1-3) : (14-16) = 1CT:1CT ±1% (6-8) : (9-11) = 1CT:1.414CT ±5%
CAPACITANCE WINDING TO WINDING	12 pF MAX (AT 100 KHz 20 mV(RMS))
DC RESISTANCE	0.3 OHMS MAX
LEAKAGE INDUCTANCE	0.2 uH MAX
INPUT - OUTPUT ISOLATION	1500 VRMS MIN @ 60 SECONDS

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DECIMALS ANGLES
XX ±.01 ± 1°
XXX ±.005

DO NOT SCALE DRAWING

SIZE: B
CASE CODE: 01961
SCALE: NONE

DWG. NO.:
CADD FILE:

E2457NL
E2457NL-1

SHEET 1 OF 2
REV. P1

3

2

1

A

B





C

D

3

2

1

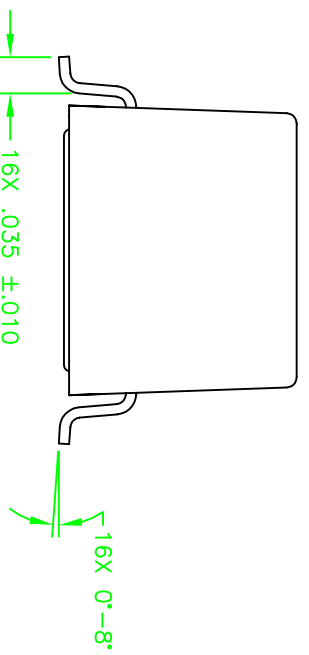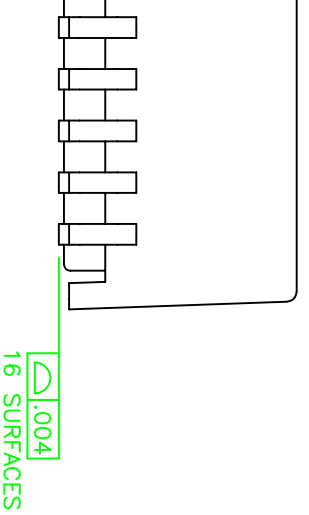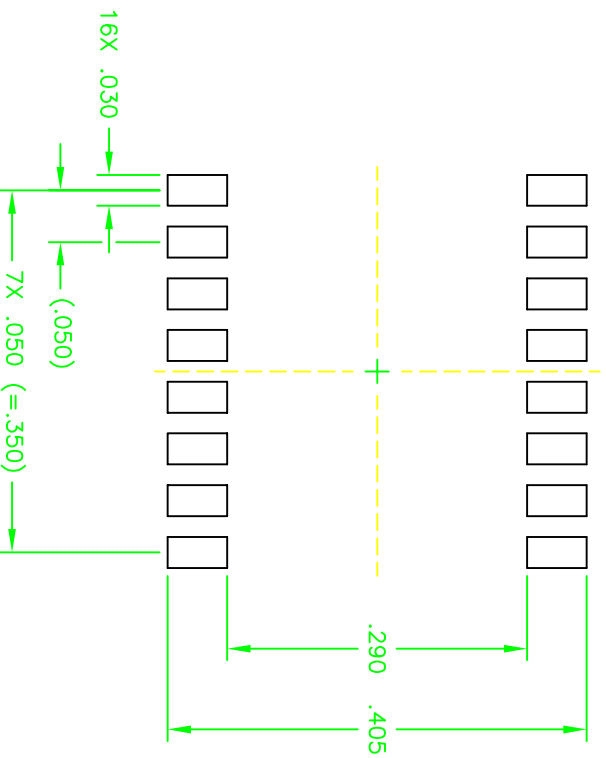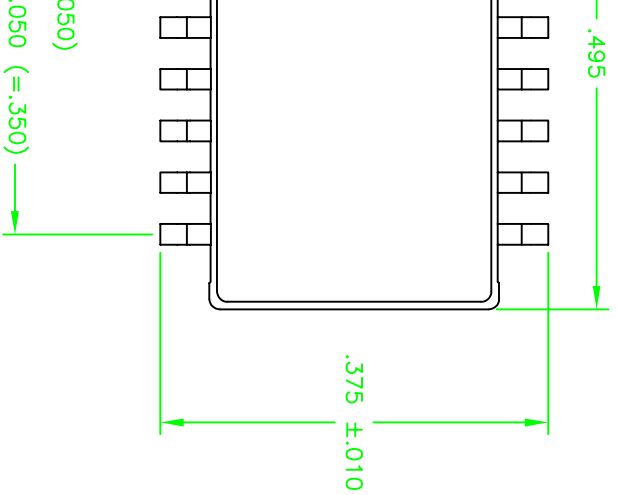

3

2

1

A

B

C

D

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 DECIMALS ANGLES
 .XX $\pm .01$ $\pm 1^\circ$
 .XXX $\pm .005$
 DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.
B	01961	E2457NL
SCALE	CADD FILE	
NONE		


E2457NL-2

SHEET	REV.
2 OF 2	P1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View E2457NLT on WIN SOURCE](#)

 [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management