



THE DATASHEET OF EM1-2U1S



DESCRIPTION

The new NEC TOKIN EM1 series is PC-board mount type and suitable for lamps, C-R circuits, heaters, fans and pumps, etc. controls application in the automobiles which require high quality and high performance.

The EM1 series have higher switching performance than current relays; EP1, ET1 and EX1 series.

FEATURE

- Suitable for large inrush current load, such as lamps, and C-R circuits, etc.
- Large current capacity (54A 1hour at 20°C)
- High heat resistance
- Flux tight housing
- Pb free
- Through-hole reflow soldering available

APPLICATION

- Lamp control
- C-R circuit control
- Heater control
- Motor control such as fans and pumps

**For Proper Use of Miniature Relays DO NOT EXCEED MAXIMUM RATING**

Do not use relay under excessive conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating and damage to the relay or other parts.

READ CAUTIONS IN THE SELECTION GUIDE

Read the cautions described in NEC's "Miniature Relays" (9600RSGVOL11E1003N1) before dose designing your relay applications.


The information in this document is subject to change without notice.

© NEC TOKIN Corporation 2010






- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

SCHMATIC (BOTTOM VIEW)




1 form U

DIMENSIONS [mm]

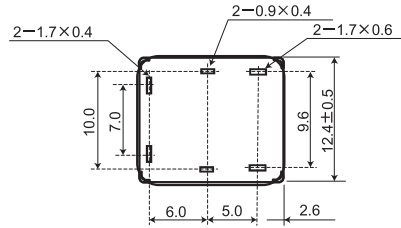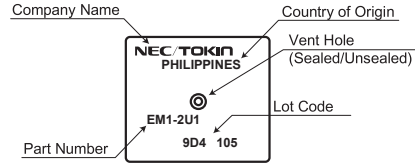

* After soldering

PCB PAD LAYOUT [mm] (BOTTOM VIEW)



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

SPECIFICATIONS

(Ambient temperature:20°C)

Items		Specifications	
Contact Form		1 Form U	
Contact Ratings	Maximum Switching Voltage	16VDC	
	Maximum Switching Current	100A ON / 60A OFF at 14VDC (Resistive, 10 operations)	
	Minimum Switching Current	1A (5VDC)	
	Maximum Carrying Current	54A at 14VDC for 1hour ^{*1}	
	Contact Resistance	2.5mΩ typical (measured at 7A) initial	
Contact Material		Silver oxide complex alloy	
Operate Time (Excluding bounce)		6ms typical (at Nominal Voltage)	
Release Time (Excluding bounce)		1ms typical (at Nominal Voltage, without diode) initial	
Nominal Operating Power		640 mW	
Insulation Resistance		100 MΩ at 500 VDC	
Withstand Voltage	Between open contacts	500 VAC min. (for 1 minute)	
	Between coil and contacts	500 VAC min. (for 1 minute)	
Shock Resistance	Misoperation	98 m/s ² (10G)	
	Destructive Failure	980 m/s ² (100G)	
Vibration Resistance	Misoperation	10 to 300 Hz, 43 m/s ² (4.4G)	
	Destructive Failure	10 to 500Hz, 43m/s ² (4.4G), 200hours	
Ambient Temperature		- 40 to + 125°C	
Running Specifications	Non-load	1 × 10 ⁶ operations	
	Load	Resistive	100 × 10 ³ operations (at 14VDC, 40A)
		Lamp	100 × 10 ³ operations (at 14VDC, Inrush 120A/ Steady 14A)
Weight		Approx. 8g	

*1 Mounted on PC-board: FR-4 (Thickness; 1.6mm), Copper (Thickness; 105 μm,Width; 15mm)

COIL RATING

(Ambient temperature:20°C)


Part Numbers	Nominal Voltage (VDC)	Coil Resistance (Ω) ± 10%	Must Operate Voltage ^{*2} (VDC)	Must Release Voltage ^{*2} (VDC)
EM1-2U1	12	225	6.5	0.9

*2 Test by pulse voltage




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

PART NUMBER SYSTEM

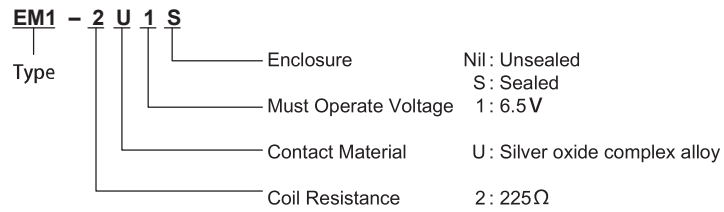


COIL DRIVE CIRCUIT

Recommended Circuit

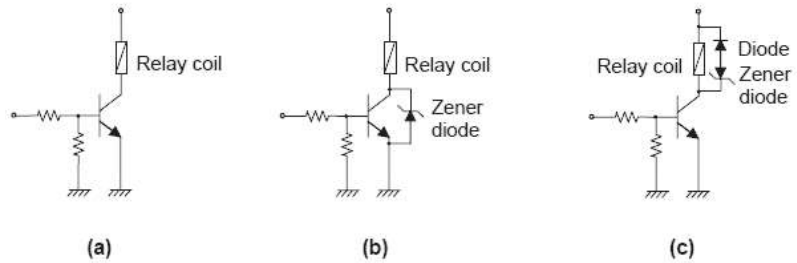

Non-recommended Circuit



(NOTE)

NEC TOKIN recommends coil drive circuit (b) and (c) for coil flyback suppression, but does not recommend the circuit (d) because the performance of EM1 relay not appear enough.





- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

TECHINICAL DATA

Coil Temperature Rise






(Ambient Temperature 20°C)

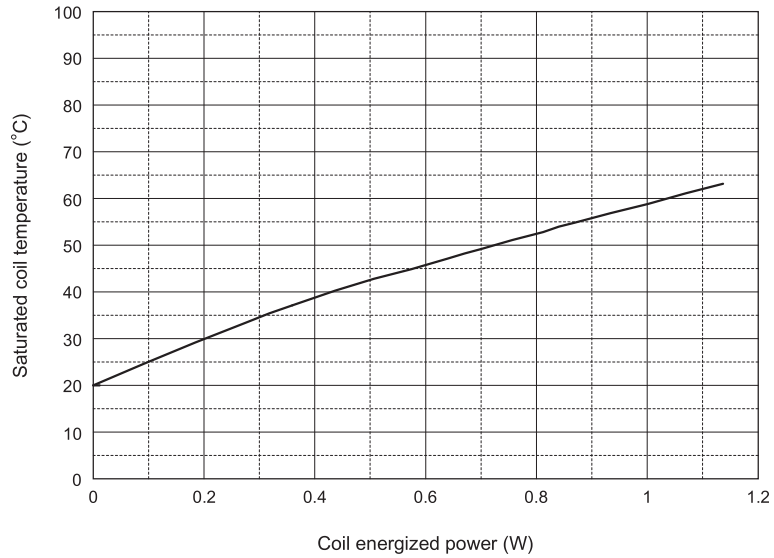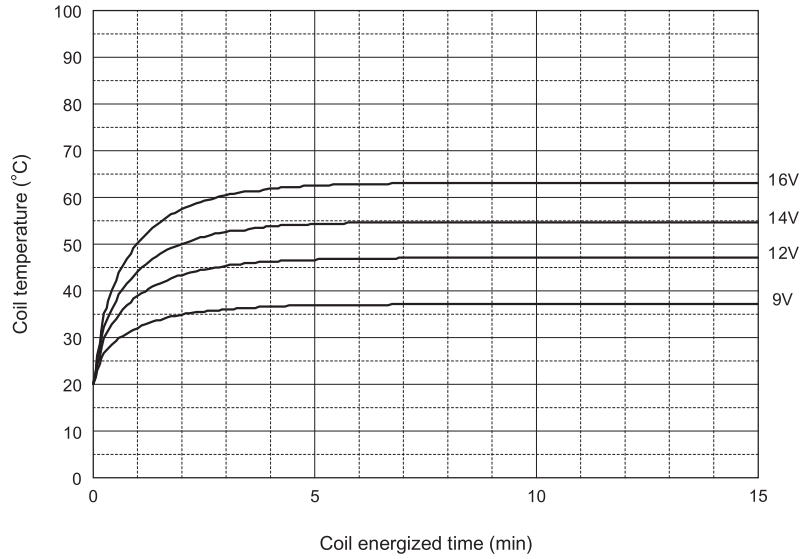

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

RELAY CHARACTERISTICS DISTRIBUTION (INITIAL)


Specimen : EM1-2U1S
 Ambient Temperature : 20°C
 Quantity : 25pcs.

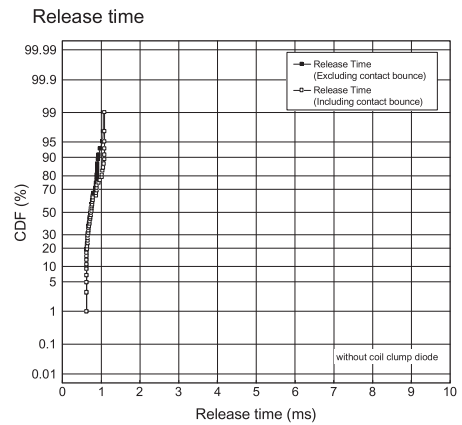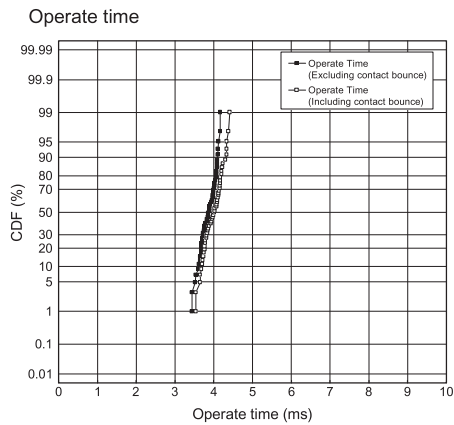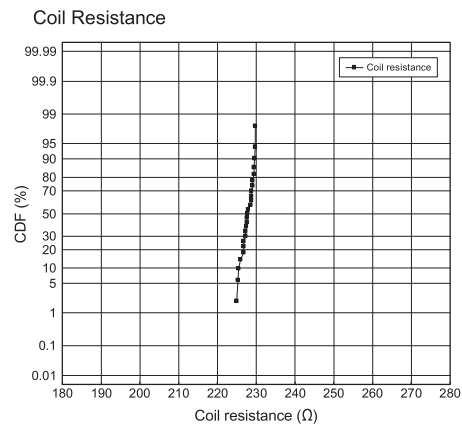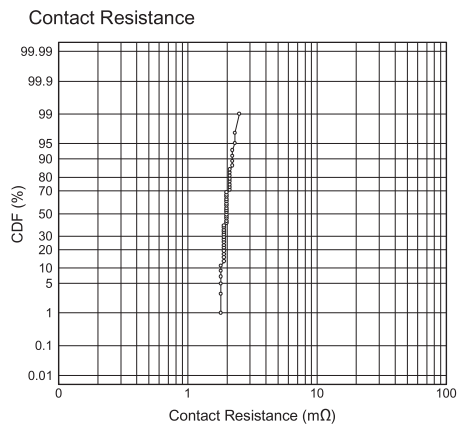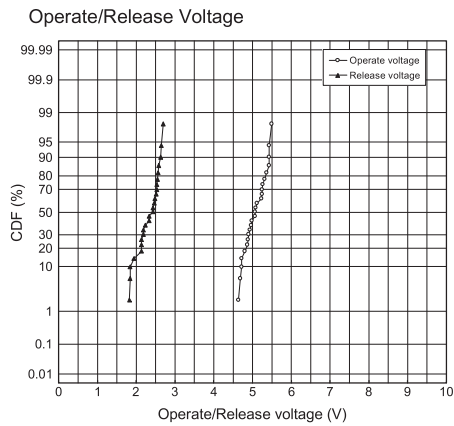


- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

ELECTRICAL LIFE TEST (14VDC- 40A, Resistive load)


Test items	Test conditions	Samples
1. Operate voltage 2. Release voltage 3. Contact resistance 4. Coil resistance 5. Operate time 6. Release time (without coil clump diode)	Temperature : 20°C Frequency : 1Hz(0.1s ON, 0.9s OFF) Contact load : 14VDC-40A, Resistive Number of operations : 100 x 10 ³	EM1-2U1S 5 pcs

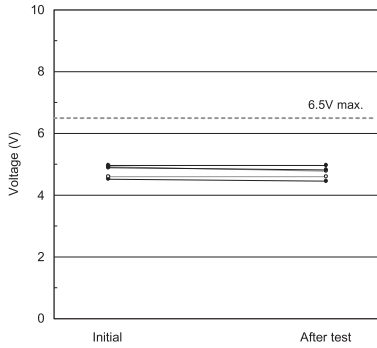


Operate voltage

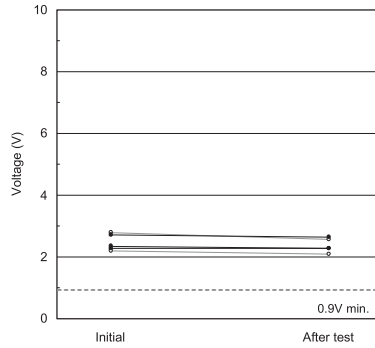


Release voltage

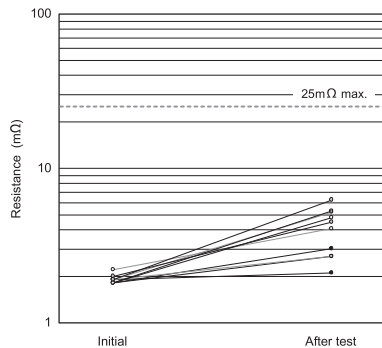


Contact resistance (N/O)

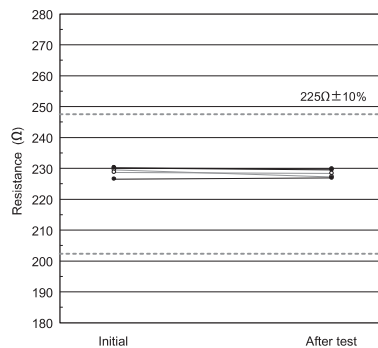

Coil resistance

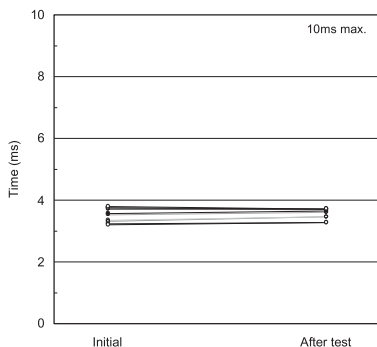

Operate time

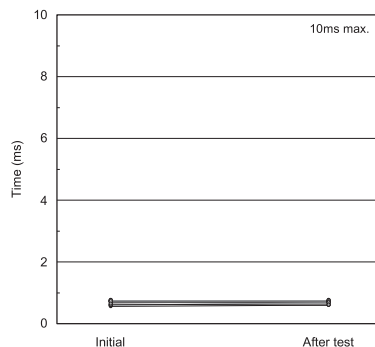


Release time




●All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
 ●Please request for a specification sheet for detailed product data prior to the purchase.
 ●Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

ELECTRICAL LIFE TEST (14VDC, Inrush current 120A, Lamp load)


Test items	Test conditions	Samples
1. Operate voltage 2. Release voltage 3. Contact resistance 4. Coil resistance 5. Operate time 6. Release time (without coil clump diode)	Temperature : 20°C Frequency : 0.67Hz (0.2s ON, 1.3s OFF) Contact load : 14Vdc, Inrush current 120A, Steady current 14A Number of operations : 100 x 10 ³	EM1-2U1S 5 pcs

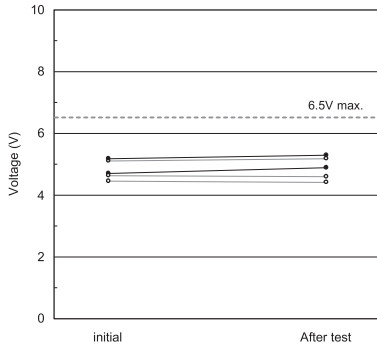


Operate voltage

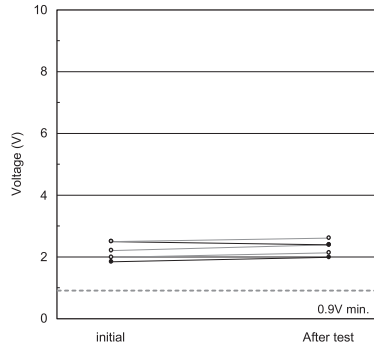


Release voltage

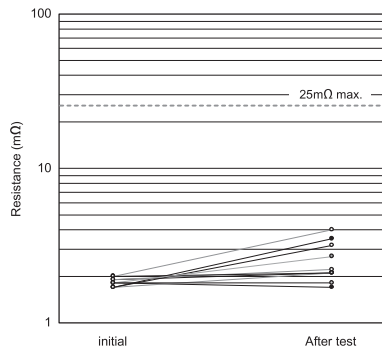


Contact resistance (N/O)

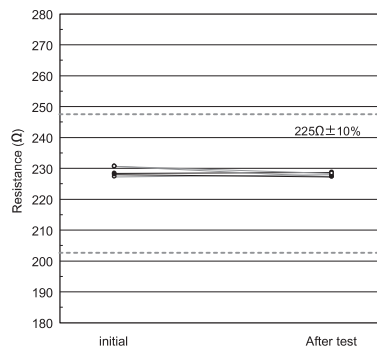

Coil resistance

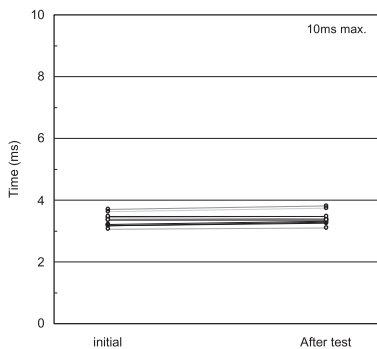

Operate time

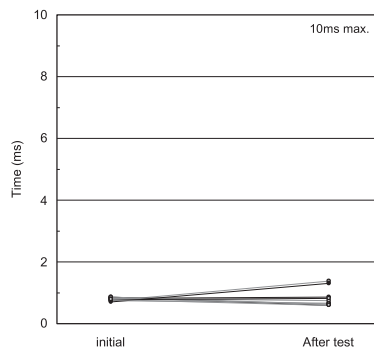

Release time



● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
 ● Please request for a specification sheet for detailed product data prior to the purchase.
 ● Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View EM1-2U1S on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management