




**THE DATASHEET OF  
FHP-08-02-T-S**



# POWER HEADERS, STACKERS & SOCKETS

MAX  
13.1  
A m p s

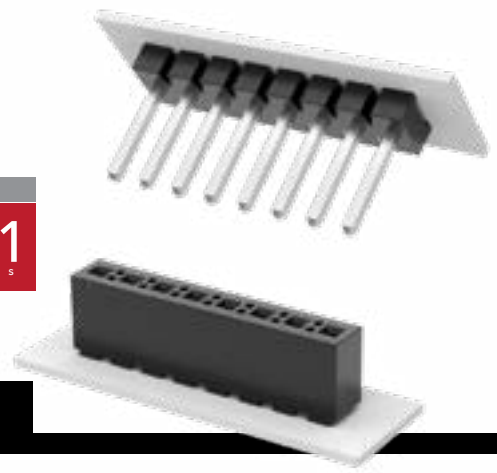

(3.96 mm) .156" PITCH • FWJ, HFWJ, JW, FHP SERIES

**FWJ, HFWJ, JW**  
Board Mates:  
FHP

**FHP**  
Board Mates:  
FWJ, HFWJ, JW

## SPECIFICATIONS

**Insulator Material:**  
FWJ = Black Glass Filled Polyester  
HFWJ, JW = Natural Liquid Crystal Polymer  
FHP = Black LCP

**Terminal Material (FWJ, HFWJ, JW):**  
Phosphor Bronze

**Contact Material (FHP):**  
BeCu

**Plating:**  
Sn over 50  $\mu$ " (1.27  $\mu$ m) Ni

**Operating Temp Range:**  
-55 °C to +105 °C

**Voltage Rating:**  
600 VAC/845 VDC

**Insertion Depth (FHP):**  
(3.57 mm) .140" to (8.76 mm) .345" or pass-through from top

**Wiping Distance (FHP):**  
(0.38 mm) .015"

## PROCESSING

**Lead-Free Solderable:**  
FWJ = No, Lead Wave only  
HFWJ, JW, FHP = Yes

**SMT Lead Coplanarity:**  
HFWJ, FWJ, JW = (0.20 mm) .008" max (02-16)\*  
(0.25 mm) .010" max (17-24)\*  
FHP = (0.15 mm) .006" max\*  
\*(.004" stencil solution may be available; contact ipg@samtec.com)

| SERIES | NO. OF PINS | LEAD STYLE | PLATING OPTION | S | OTHER OPTIONS |
|--------|-------------|------------|----------------|---|---------------|
|--------|-------------|------------|----------------|---|---------------|

**FWJ**  
Standard Header

**HFWJ**  
High Temp Header

Specify LEAD STYLE from chart below



-T = Matte Tin

Leave blank for Through-hole

-RA = Right-angle (Style -02 & -04 only)

-VS = Surface Mount Requires HFWJ (2 pins/row minimum) Style -05 not available.

-P = Pick & Place Pad (3 Pos. min.) (6.98 mm) .275" min. post height (-VS only)

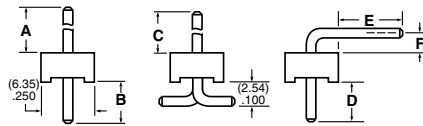

| LEAD STYLE | A            | B            | C            | D           | E            | F           |
|------------|--------------|--------------|--------------|-------------|--------------|-------------|
| -01        | (11.43) .450 | (4.45) .175  | (10.46) .412 | -           | -            | -           |
| -02        | (12.70) .500 | (11.73) .462 | (4.45) .175  | (8.13) .320 | (2.54) .100  |             |
| -04        | (20.55) .809 | (3.96) .156  | (19.10) .752 | (3.96) .156 | (13.56) .534 | (4.95) .195 |
| -05*       | (3.81) .150  | (12.07) .475 | -            | -           | -            | -           |

\*FWJ Only

| JW | NO. OF PINS | 04 | PLATING OPTION | S | STACK HEIGHT | POST HEIGHT | OTHER OPTIONS |
|----|-------------|----|----------------|---|--------------|-------------|---------------|
|----|-------------|----|----------------|---|--------------|-------------|---------------|

02 thru 24

-T = Matte Tin


-"XXX"  
= Stacker Height (in inches) (0.13 mm) .005" increments

-"XXX"  
= Post Height (in inches)

Leave blank for Through-hole

-VS = Surface Mount (2 pins/row minimum)

-P = Pick & Place Pad (3 Pos. min.) (6.98 mm) .275" min. post height (-VS only)

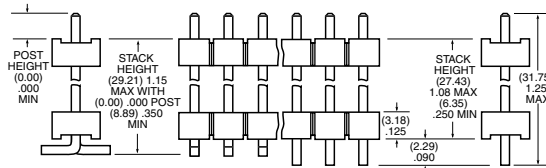

| FHP | NO. OF PINS | LEAD STYLE | PLATING OPTION | S | OTHER OPTIONS |
|-----|-------------|------------|----------------|---|---------------|
|-----|-------------|------------|----------------|---|---------------|

02 thru 24

-01 = Through-hole

-T = Matte Tin


-02 = Surface Mount

-LC = Locking Clip (Manual placement required) (-02 lead style only)

-TR = Tape & Reel Packaging (Available on positions 2-18) (-02 lead style only)

-K = (6.50 mm) .256" DIA Polyimide film Pick & Place Pad (2-4 positions require -"X"R) (-02 lead style only)


-FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) (Available on positions 2-18) (-02 lead style only)

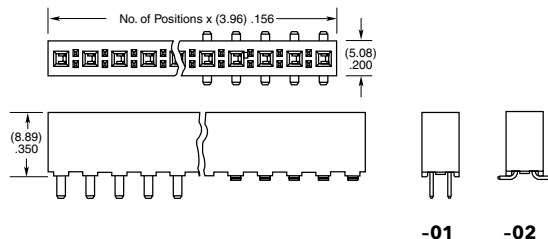

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View FHP-08-02-T-S on WIN SOURCE](#)

 [Samtec Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management