
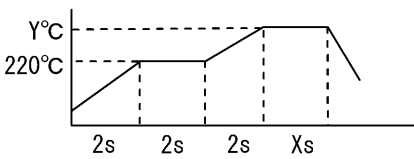








**THE DATASHEET OF
FX16-21P-0.5SD**



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

APPLICABLE STANDARD					
 RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C ⁽¹⁾⁽²⁾	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C ⁽³⁾	
	VOLTAGE	60 V AC ⁽⁵⁾	OPERATING HUMIDITY RANGE	RH 85 % MAX ⁽²⁾⁽⁴⁾	
	CURRENT	0.5 A ⁽⁵⁾	STORAGE HUMIDITY RANGE	RH 70 % MAX ⁽³⁾⁽⁴⁾	
	APPLICABLE CABLE	AWG 36,40 THIN COAXIAL CABLE / FFC ⁽⁶⁾			
SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
CONSTRUCTION					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	x	x	
MARKING	CONFIRMED VISUALLY.		x	x	
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE	20 mV MAX, 1 mA(DC OR 1000Hz)	80mΩ MAX. ⁽⁷⁾	x		
INSULATION RESISTANCE	100 V DC.	500 MΩ MIN.	x		
VOLTAGE PROOF	200 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	x		
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 10.5 N MAX. WITHDRAWAL FORCE: 1.05 N MIN.	x		
MECHANICAL OPERATION	50 TIMES INSERTIONS AND EXTRACTIONS.	① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	x		
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGL AMPLITUDE : 0.75 mm, AT 2 h FOR 3 DIRECTION.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	x		
SHOCK	490 m/s ² , DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		x		
LOCK STRENGTH	MATE TO APPLICABLE CONNECTOR AND APPLY PULL FORCE HORIZONTALLY.	30 N MIN.	x		
ENVIRONMENTAL CHARACTERISTICS					
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, 90 ~ 95 %, 96 h.	① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE.	x		
DRY HEAT	EXPOSED AT 85±2 °C, 96 h				
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→+5~+35→+85→+5~+35°C TIME 30→ 5 MAX→ 30→5 MAX min. UNDER 5 CYCLES.	② INSULATION RESISTANCE: 500 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	x		
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	① CONTACT RESISTANCE:NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE. ② NO DEFECT SUCH AS CORROSION WHICH IMPAIRS THE FUNCTION OF CONNECTOR.	x		
SULFUR DIOXIDE	EXPOSED IN 25 PPM FOR 96 h. (TEST STANDARD: JIS C 60068)				
RESISTANCE TO SOLDERING HEAT	1)SOLDERING HEAT WELDER : PRESSURIZATION:15±2N (COAXIAL CABLE) HEATING Y:275±5°C, X:2±0.5 sec (FFC) HEATING Y:265±5°C, X:2.5±0.5 sec 	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINAL.	x		
	2) SOLDERING IRONS : 360°C MAX. FOR 3 sec.		x		
SOLDERABILITY	SOLDERED AT SOLDER TEMPERATURE 240±3°C FOR IMMERSION DURATION, 3 sec.	A NEW UNIFORM COATING OF SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMERSED.	x		
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	2	DIS-F-004353	KN. SHIBUYA	HT. YAMAGUCHI	09.12.15
	REMARKS (1) INCLUDE TEMPERATURE RISE CAUSED BY CURRENT-CARRYING. (2) OPERATING TEMPERATURE SHOULD BE -55 TO 40°C WHEN HUMIDITY EXCEEDS 80% RH. (3) THE SPECIFICATION IS APPLIED TO THE PRE-ASSEMBLED COMPONENT AND THE CABLE ASSEMBLED PRODUCT BOTH IN DELIVERY AND STORAGE, BEFORE ASSEMBLED TO PCB. (4) THERE MUST NOT BE DEWFALL. (5) IT IS THE MAXIMUM VALUE OF CONNECTOR. CONFIRM THE SPECIFICATION OF THE CABLE. (6) ONLY FFC THAT PROCESSES THE TERMINAL THAT WE SPECIFIED. (7) DON'T INCLUDE CONDUCTOR RESISTANCE OF CABLE.		APPROVED	HS. OKAWA	08.08.29
			CHECKED	HT. YAMAGUCHI	08.08.29
			DESIGNED	KN. SHIBUYA	08.08.29
			DRAWN	KN. SHIBUYA	08.08.29
			Unless otherwise specified, refer to JIS-C-5402.		
Note	QT:Qualification Test AT:Assurance Test X:Applicable Test	DRAWING NO.	ELC4-157673-00		
	SPECIFICATION SHEET		PART NO.	FX16-21P-0.5SD	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL575-3301-7-00	 1/1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View FX16-21P-0.5SD on WIN SOURCE](#)
-  [Hirose Electric Co Ltd Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management