




**THE DATASHEET OF
HHM17144A1**



MULTILAYER BALUN SPECIFICATION

P/N: **HHM17144A1** For 791-960MHz

[MECHANICAL DIMENSIONS]

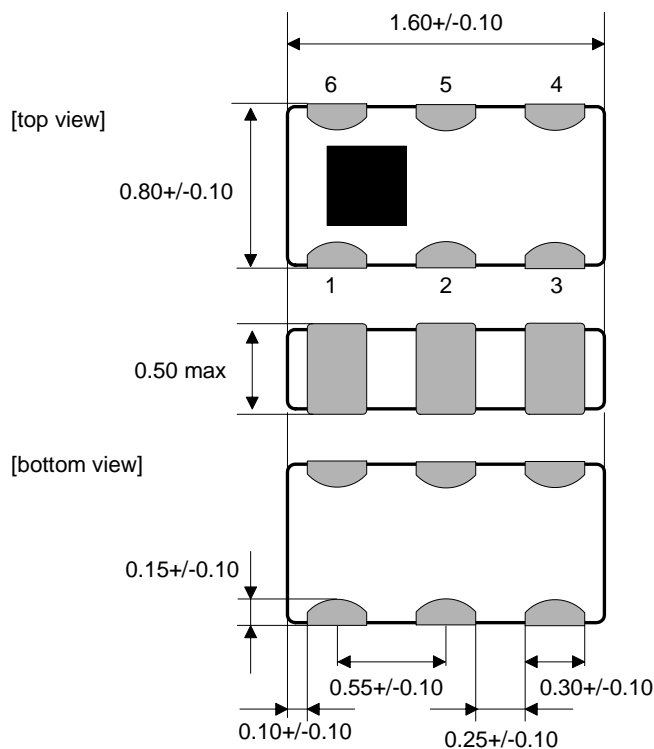

Pin configuration

1. Unbalanced Port
2. GND or DC feed+ RF GND
3. Balanced Port
4. Balanced Port
5. GND
6. N.C.

Unit : mm

[ELECTRICAL CHARACTERISTICS]


Unbalanced Impedance	50 ohm
Balanced Impedance	100 ohm
Frequency Range	791 - 960 MHz
Unbalanced Port Return Loss	10.0 dB Min.
Phase Imbalance at Balanced Port	180 +/- 10 deg
Amplitude Imbalance at Balanced Port	0 +/- 1.5 dB
Insertion Loss	1.2 dB Max.

[TEMPERATURE RANGE]


Storage Temperature	-40°C ~ +85°C
Operating Temperature	-40°C ~ +85°C

[FREQUENCY RESPONSE]


Return Loss

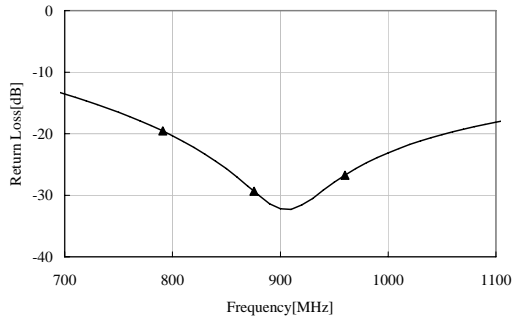


Amplitude Balance

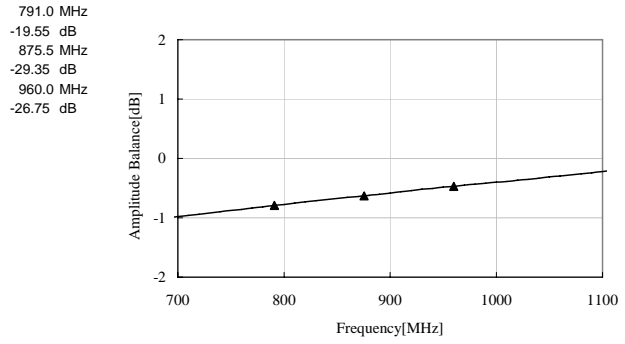


Insertion Loss

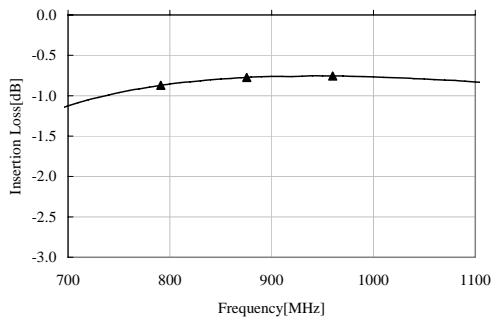

Phase Balance

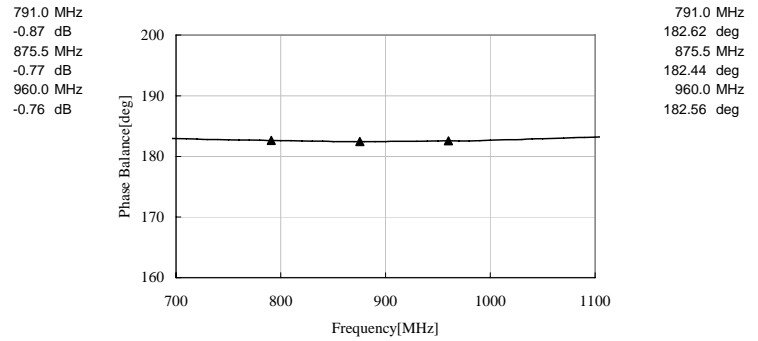

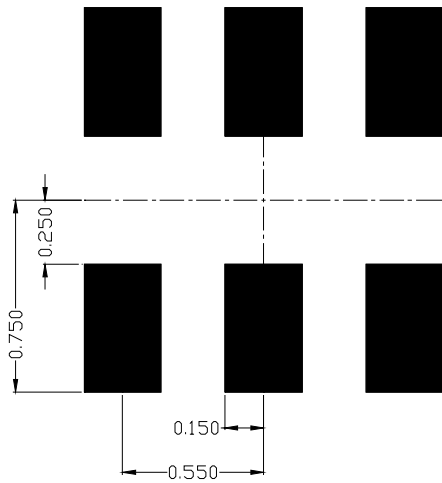

[RECOMMENDED LAND PATTERN]



Unit : mm

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HHM17144A1](#) on WIN SOURCE
-  [TDK Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management