



ISL88001, ISL88002, ISL88003

Ultra Low Power 3 Ld Voltage Supervisors in SC-70 and SOT-23 Packages


FN6174  
Rev 3.00  
Feb 10, 2021

The ISL88001, ISL88002, ISL88003 supervisors are extremely low power 160nA voltage supervisors that help to monitor the power supply voltages in a wide variety of applications. By providing Power-On Reset and supply voltage supervision in small 3 Ld SC-70 and SOT-23 packages, the ISL88001, ISL88002, ISL88003 devices can help to lower system cost, reduce board space requirements and increase the reliability of systems.


The most popular voltage trip points are available for standard power supplies from 1.8V to 5.0V (see "Ordering Information" on page 3). These reset threshold voltages are accurate to within  $\pm 1.2\%$  and the reset signal is valid down to 1V. Active high and active low reset outputs are available in push-pull and open drain configurations (see "Functional Block Diagrams" on page 2).

The ISL88001, ISL88002, ISL88003 devices are specifically designed for low power consumption and high threshold accuracy, making them especially suitable for electronic devices and portable equipment.

**Pinouts**



ISL88001 has a push-pull  $\overline{\text{RST}}$  output  
ISL88002 has an open-drain  $\overline{\text{RST}}$  output



ISL88003 has a push-pull RST output

**Features**

- Single Voltage Monitoring Supervisors
- Fixed-Voltage Options Allow Precise Monitoring of +1.8V, +2.5V, +3.0V, +3.3V, and +5.0V Power Supplies
- Ultra Low 160nA Supply Current
- $\pm 1.2\%$  Voltage Threshold Accuracy
- 190ms Power-On Reset Timeout
- Reset Signal Valid Down to  $V_{DD} = 1V$
- No External Components Necessary
- Immune to Power-Supply Transients
- Available in Small 3 Ld SC-70 and 3 Ld SOT-23 Pb-free Packages
- Pin Compatible with MAX803, MAX809, MAX810
- Pb-Free (RoHS Compliant)


**Applications**

- Microprocessor/Microcontroller Systems
- Intelligent Instruments
- Controllers
- Computer Systems
- Portable/Battery-Powered Equipment
- PDA and Hand-Held PC Devices


**Pin Descriptions**

| PIN                  |          | PIN NAME                | PIN FUNCTION  |
|----------------------|----------|-------------------------|---|
| ISL88001<br>ISL88002 | ISL88003 |                         |   |
| 1                    | 1        | GND                     | Ground IC reference.  |
| 2                    |          | $\overline{\text{RST}}$ | The $\overline{\text{RST}}$ pin is an active-low reset output that is pulled to GND (LOW) when reset is asserted. The ISL88001 is push-pull while the ISL88002 is open drain. |
|                      | 2        | RST                     | The RST pin is a push-pull active-high reset output that is pulled to $V_{\text{DD}}$ (HIGH) when reset is asserted.  |
| 3                    | 3        | $V_{\text{DD}}$         | Supply Voltage and Monitored Input. The $V_{\text{DD}}$ pin is the IC power supply terminal and also the monitored input.   |


**Functional Block Diagrams**

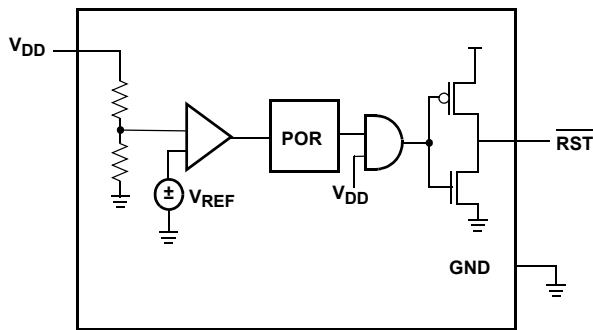

ISL88001

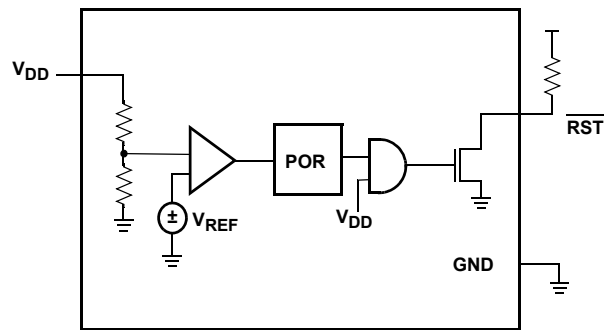

ISL88002

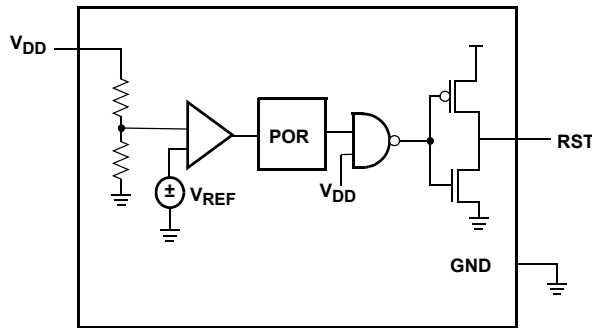

ISL88003

## Ordering Information

| PART NUMBER<br>(Notes 1, 5) | PART<br>MARKING<br>(Note 6) | RESET                      | NOMINAL<br>V <sub>THVDD</sub> (V) | TEMPERATURE<br>RANGE (°C) | TAPE AND REEL<br>(Units) (Note 2) | PACKAGE<br>Tape and Reel<br>(Pb-free) | PKG.<br>DWG. # |
|-----------------------------|-----------------------------|----------------------------|-----------------------------------|---------------------------|-----------------------------------|---------------------------------------|----------------|
| ISL88001IE46Z-T (Note 3)    | 146                         | Push-Pull $\overline{RST}$ | 4.62                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE46Z-T7A (Note 3)  | 146                         | Push-Pull $\overline{RST}$ | 4.62                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE46Z-TK (Note 3)   | 146                         | Push-Pull $\overline{RST}$ | 4.62                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE44Z-T (Note 3)    | 144                         | Push-Pull $\overline{RST}$ | 4.38                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE44Z-T7A (Note 3)  | 144                         | Push-Pull $\overline{RST}$ | 4.38                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE44Z-TK (Note 3)   | 144                         | Push-Pull $\overline{RST}$ | 4.38                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE31Z-T (Note 3)    | 131                         | Push-Pull $\overline{RST}$ | 3.07                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE31Z-T7A (Note 3)  | 131                         | Push-Pull $\overline{RST}$ | 3.07                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE31Z-TK (Note 3)   | 131                         | Push-Pull $\overline{RST}$ | 3.07                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE29Z-T (Note 3)    | 129                         | Push-Pull $\overline{RST}$ | 2.92                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE29Z-T7A (Note 3)  | 129                         | Push-Pull $\overline{RST}$ | 2.92                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE29Z-TK (Note 3)   | 129                         | Push-Pull $\overline{RST}$ | 2.92                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE26Z-T (Note 3)    | 126                         | Push-Pull $\overline{RST}$ | 2.63                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE26Z-T7A (Note 3)  | 126                         | Push-Pull $\overline{RST}$ | 2.63                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE26Z-TK (Note 3)   | 126                         | Push-Pull $\overline{RST}$ | 2.63                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE23Z-T (Note 3)    | 123                         | Push-Pull $\overline{RST}$ | 2.32                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE23Z-T7A (Note 3)  | 123                         | Push-Pull $\overline{RST}$ | 2.32                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE23Z-TK (Note 3)   | 123                         | Push-Pull $\overline{RST}$ | 2.32                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE22Z-T (Note 3)    | 122                         | Push-Pull $\overline{RST}$ | 2.19                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE22Z-T7A (Note 3)  | 122                         | Push-Pull $\overline{RST}$ | 2.19                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE22Z-TK (Note 3)   | 122                         | Push-Pull $\overline{RST}$ | 2.19                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE17Z-T (Note 3)    | 117                         | Push-Pull $\overline{RST}$ | 1.67                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE17Z-T7A (Note 3)  | 117                         | Push-Pull $\overline{RST}$ | 1.67                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE17Z-TK (Note 3)   | 117                         | Push-Pull $\overline{RST}$ | 1.67                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE16Z-T (Note 3)    | 116                         | Push-Pull $\overline{RST}$ | 1.58                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IE16Z-T7A (Note 3)  | 116                         | Push-Pull $\overline{RST}$ | 1.58                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88001IE16Z-TK (Note 3)   | 116                         | Push-Pull $\overline{RST}$ | 1.58                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88001IH46Z-T (Note 4)    | 1H46                        | Push-Pull $\overline{RST}$ | 4.62                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH46Z-T7A (Note 4)  | 1H46                        | Push-Pull $\overline{RST}$ | 4.62                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH46Z-TK (Note 4)   | 1H46                        | Push-Pull $\overline{RST}$ | 4.62                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH44Z-T (Note 4)    | 1H44                        | Push-Pull $\overline{RST}$ | 4.38                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH44Z-T7A (Note 4)  | 1H44                        | Push-Pull $\overline{RST}$ | 4.38                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH44Z-TK (Note 4)   | 1H44                        | Push-Pull $\overline{RST}$ | 4.38                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH31Z-T (Note 4)    | 1H31                        | Push-Pull $\overline{RST}$ | 3.07                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH31Z-T7A (Note 4)  | 1H31                        | Push-Pull $\overline{RST}$ | 3.07                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH31Z-TK (Note 4)   | 1H31                        | Push-Pull $\overline{RST}$ | 3.07                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH29Z-T (Note 4)    | 1H29                        | Push-Pull $\overline{RST}$ | 2.92                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH29Z-T7A (Note 4)  | 1H29                        | Push-Pull $\overline{RST}$ | 2.92                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |

**Ordering Information** (Continued)

| PART NUMBER<br>(Notes 1, 5) | PART<br>MARKING<br>(Note 6) | RESET                              | NOMINAL<br>V <sub>THVDD</sub> (V) | TEMPERATURE<br>RANGE (°C) | TAPE AND REEL<br>(Units) (Note 2) | PACKAGE<br>Tape and Reel<br>(Pb-free) | PKG.<br>DWG. # |
|-----------------------------|-----------------------------|------------------------------------|-----------------------------------|---------------------------|-----------------------------------|---------------------------------------|----------------|
| ISL88001IH29Z-TK (Note 4)   | 1H29                        | Push-Pull $\overline{\text{RST}}$  | 2.92                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH26Z-T (Note 4)    | 1H26                        | Push-Pull $\overline{\text{RST}}$  | 2.63                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH26Z-T7A (Note 4)  | 1H26                        | Push-Pull $\overline{\text{RST}}$  | 2.63                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH26Z-TK (Note 4)   | 1H26                        | Push-Pull $\overline{\text{RST}}$  | 2.63                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH23Z-T (Note 4)    | 1H23                        | Push-Pull $\overline{\text{RST}}$  | 2.32                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH23Z-T7A (Note 4)  | 1H23                        | Push-Pull $\overline{\text{RST}}$  | 2.32                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH23Z-TK (Note 4)   | 1H23                        | Push-Pull $\overline{\text{RST}}$  | 2.32                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH22Z-T (Note 4)    | 1H22                        | Push-Pull $\overline{\text{RST}}$  | 2.19                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH22Z-T7A (Note 4)  | 1H22                        | Push-Pull $\overline{\text{RST}}$  | 2.19                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH22Z-TK (Note 4)   | 1H22                        | Push-Pull $\overline{\text{RST}}$  | 2.19                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH17Z-T (Note 4)    | 1H17                        | Push-Pull $\overline{\text{RST}}$  | 1.67                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH17Z-T7A (Note 4)  | 1H17                        | Push-Pull $\overline{\text{RST}}$  | 1.67                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH17Z-TK (Note 4)   | 1H17                        | Push-Pull $\overline{\text{RST}}$  | 1.67                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH16Z-T (Note 4)    | 1H16                        | Push-Pull $\overline{\text{RST1}}$ | 1.58                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH16Z-T7A (Note 4)  | 1H16                        | Push-Pull $\overline{\text{RST1}}$ | 1.58                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88001IH16Z-TK (Note 4)   | 1H16                        | Push-Pull $\overline{\text{RST1}}$ | 1.58                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IE46Z-T (Note 3)    | 246                         | Open Drain $\overline{\text{RST}}$ | 4.62                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE46Z-T7A (Note 3)  | 246                         | Open Drain $\overline{\text{RST}}$ | 4.62                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE46Z-TK (Note 3)   | 246                         | Open Drain $\overline{\text{RST}}$ | 4.62                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE44Z-T (Note 3)    | 244                         | Open Drain $\overline{\text{RST}}$ | 4.38                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE44Z-T7A (Note 3)  | 244                         | Open Drain $\overline{\text{RST}}$ | 4.38                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE44Z-TK (Note 3)   | 244                         | Open Drain $\overline{\text{RST}}$ | 4.38                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE31Z-T (Note 3)    | 231                         | Open Drain $\overline{\text{RST}}$ | 3.07                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE31Z-T7A (Note 3)  | 231                         | Open Drain $\overline{\text{RST}}$ | 3.07                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE31Z-TK (Note 3)   | 231                         | Open Drain $\overline{\text{RST}}$ | 3.07                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE29Z-T (Note 3)    | 229                         | Open Drain $\overline{\text{RST}}$ | 2.92                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE29Z-T7A (Note 3)  | 229                         | Open Drain $\overline{\text{RST}}$ | 2.92                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE29Z-TK (Note 3)   | 229                         | Open Drain $\overline{\text{RST}}$ | 2.92                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE26Z-T (Note 3)    | 226                         | Open Drain $\overline{\text{RST}}$ | 2.63                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE26Z-T7A (Note 3)  | 226                         | Open Drain $\overline{\text{RST}}$ | 2.63                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE26Z-TK (Note 3)   | 226                         | Open Drain $\overline{\text{RST}}$ | 2.63                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE23Z-T (Note 3)    | 223                         | Open Drain $\overline{\text{RST}}$ | 2.32                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE23Z-T7A (Note 3)  | 223                         | Open Drain $\overline{\text{RST}}$ | 2.32                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE23Z-TK (Note 3)   | 223                         | Open Drain $\overline{\text{RST}}$ | 2.32                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE22Z-T (Note 3)    | 222                         | Open Drain $\overline{\text{RST}}$ | 2.19                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE22Z-T7A (Note 3)  | 222                         | Open Drain $\overline{\text{RST}}$ | 2.19                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE22Z-TK (Note 3)   | 222                         | Open Drain $\overline{\text{RST}}$ | 2.19                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE17Z-T (Note 3)    | 217                         | Open Drain $\overline{\text{RST}}$ | 1.67                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |

**Ordering Information** (Continued)

| PART NUMBER<br>(Notes 1, 5) | PART<br>MARKING<br>(Note 6) | RESET                              | NOMINAL<br>V <sub>THVDD</sub> (V) | TEMPERATURE<br>RANGE (°C) | TAPE AND REEL<br>(Units) (Note 2) | PACKAGE<br>Tape and Reel<br>(Pb-free) | PKG.<br>DWG. # |
|-----------------------------|-----------------------------|------------------------------------|-----------------------------------|---------------------------|-----------------------------------|---------------------------------------|----------------|
| ISL88002IE17Z-T7A (Note 3)  | 217                         | Open Drain $\overline{\text{RST}}$ | 1.67                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE17Z-TK (Note 3)   | 217                         | Open Drain $\overline{\text{RST}}$ | 1.67                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE16Z-T (Note 3)    | 216                         | Open Drain $\overline{\text{RST}}$ | 1.58                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IE16Z-T7A (Note 3)  | 216                         | Open Drain $\overline{\text{RST}}$ | 1.58                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88002IE16Z-TK (Note 3)   | 216                         | Open Drain $\overline{\text{RST}}$ | 1.58                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88002IH46Z-T (Note 4)    | 2H46                        | Open Drain $\overline{\text{RST}}$ | 4.62                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH46Z-T7A (Note 4)  | 2H46                        | Open Drain $\overline{\text{RST}}$ | 4.62                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH46Z-TK (Note 4)   | 2H46                        | Open Drain $\overline{\text{RST}}$ | 4.62                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH44Z-T (Note 4)    | 2H44                        | Open Drain $\overline{\text{RST}}$ | 4.38                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH44Z-T7A (Note 4)  | 2H44                        | Open Drain $\overline{\text{RST}}$ | 4.38                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH44Z-TK (Note 4)   | 2H44                        | Open Drain $\overline{\text{RST}}$ | 4.38                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH31Z-T (Note 4)    | 2H31                        | Open Drain $\overline{\text{RST}}$ | 3.07                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH31Z-T7A (Note 4)  | 2H31                        | Open Drain $\overline{\text{RST}}$ | 3.07                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH31Z-TK (Note 4)   | 2H31                        | Open Drain $\overline{\text{RST}}$ | 3.07                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH29Z-T (Note 4)    | 2H29                        | Open Drain $\overline{\text{RST}}$ | 2.92                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH29Z-T7A (Note 4)  | 2H29                        | Open Drain $\overline{\text{RST}}$ | 2.92                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH29Z-TK (Note 4)   | 2H29                        | Open Drain $\overline{\text{RST}}$ | 2.92                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH26Z-T (Note 4)    | 2H26                        | Open Drain $\overline{\text{RST}}$ | 2.63                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH26Z-T7A (Note 4)  | 2H26                        | Open Drain $\overline{\text{RST}}$ | 2.63                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH26Z-TK (Note 4)   | 2H26                        | Open Drain $\overline{\text{RST}}$ | 2.63                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH23Z-T (Note 4)    | 2H23                        | Open Drain $\overline{\text{RST}}$ | 2.32                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH23Z-T7A (Note 4)  | 2H23                        | Open Drain $\overline{\text{RST}}$ | 2.32                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH23Z-TK (Note 4)   | 2H23                        | Open Drain $\overline{\text{RST}}$ | 2.32                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH22Z-T (Note 4)    | 2H22                        | Open Drain $\overline{\text{RST}}$ | 2.19                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH22Z-T7A (Note 4)  | 2H22                        | Open Drain $\overline{\text{RST}}$ | 2.19                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH22Z-TK (Note 4)   | 2H22                        | Open Drain $\overline{\text{RST}}$ | 2.19                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH17Z-T (Note 4)    | 2H17                        | Open Drain $\overline{\text{RST}}$ | 1.67                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH17Z-T7A (Note 4)  | 2H17                        | Open Drain $\overline{\text{RST}}$ | 1.67                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH17Z-TK (Note 4)   | 2H17                        | Open Drain $\overline{\text{RST}}$ | 1.67                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH16Z-T (Note 4)    | 2H16                        | Open Drain $\overline{\text{RST}}$ | 1.58                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH16Z-T7A (Note 4)  | 2H16                        | Open Drain $\overline{\text{RST}}$ | 1.58                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88002IH16Z-TK (Note 4)   | 2H16                        | Open Drain $\overline{\text{RST}}$ | 1.58                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IE46Z-T (Note 3)    | 346                         | Push-Pull RST                      | 4.62                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE46Z-T7A (Note 3)  | 346                         | Push-Pull RST                      | 4.62                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE46Z-TK (Note 3)   | 346                         | Push-Pull RST                      | 4.62                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE44Z-T (Note 3)    | 344                         | Push-Pull RST                      | 4.38                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE44Z-T7A (Note 3)  | 344                         | Push-Pull RST                      | 4.38                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE44Z-TK (Note 3)   | 344                         | Push-Pull RST                      | 4.38                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |

**Ordering Information** (Continued)

| PART NUMBER<br>(Notes 1, 5) | PART<br>MARKING<br>(Note 6) | RESET         | NOMINAL<br>V <sub>THVDD</sub> (V) | TEMPERATURE<br>RANGE (°C) | TAPE AND REEL<br>(Units) (Note 2) | PACKAGE<br>Tape and Reel<br>(Pb-free) | PKG.<br>DWG. # |
|-----------------------------|-----------------------------|---------------|-----------------------------------|---------------------------|-----------------------------------|---------------------------------------|----------------|
| ISL88003IE31Z-T (Note 3)    | 331                         | Push-Pull RST | 3.07                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE31Z-T7A (Note 3)  | 331                         | Push-Pull RST | 3.07                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE31Z-TK (Note 3)   | 331                         | Push-Pull RST | 3.07                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE29Z-T (Note 3)    | 329                         | Push-Pull RST | 2.92                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE29Z-T7A (Note 3)  | 329                         | Push-Pull RST | 2.92                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE29Z-TK (Note 3)   | 329                         | Push-Pull RST | 2.92                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE26Z-T (Note 3)    | 326                         | Push-Pull RST | 2.63                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE26Z-T7A (Note 3)  | 326                         | Push-Pull RST | 2.63                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE26Z-TK (Note 3)   | 326                         | Push-Pull RST | 2.63                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE23Z-T (Note 3)    | 323                         | Push-Pull RST | 2.32                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE23Z-T7A (Note 3)  | 323                         | Push-Pull RST | 2.32                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE23Z-TK (Note 3)   | 323                         | Push-Pull RST | 2.32                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE22Z-T (Note 3)    | 322                         | Push-Pull RST | 2.19                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE22Z-T7A (Note 3)  | 322                         | Push-Pull RST | 2.19                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE22Z-TK (Note 3)   | 322                         | Push-Pull RST | 2.19                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE17Z-T (Note 3)    | 317                         | Push-Pull RST | 1.67                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE17Z-T7A (Note 3)  | 317                         | Push-Pull RST | 1.67                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE17Z-TK (Note 3)   | 317                         | Push-Pull RST | 1.67                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE16Z-T (Note 3)    | 316                         | Push-Pull RST | 1.58                              | -40 to +85                | 3k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IE16Z-T7A (Note 3)  | 316                         | Push-Pull RST | 1.58                              | -40 to +85                | 250                               | 3 Ld SC-70                            | P3.049         |
| ISL88003IE16Z-TK (Note 3)   | 316                         | Push-Pull RST | 1.58                              | -40 to +85                | 1k                                | 3 Ld SC-70                            | P3.049         |
| ISL88003IH46Z-T (Note 4)    | 3H46                        | Push-Pull RST | 4.62                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH46Z-T7A (Note 4)  | 3H46                        | Push-Pull RST | 4.62                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH46Z-TK (Note 4)   | 3H46                        | Push-Pull RST | 4.62                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH44Z-T (Note 4)    | 3H44                        | Push-Pull RST | 4.38                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH44Z-T7A (Note 4)  | 3H44                        | Push-Pull RST | 4.38                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH44Z-TK (Note 4)   | 3H44                        | Push-Pull RST | 4.38                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH31Z-T (Note 4)    | 3H31                        | Push-Pull RST | 3.07                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH31Z-T7A (Note 4)  | 3H31                        | Push-Pull RST | 3.07                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH31Z-TK (Note 4)   | 3H31                        | Push-Pull RST | 3.07                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH29Z-T (Note 4)    | 3H29                        | Push-Pull RST | 2.92                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH29Z-T7A (Note 4)  | 3H29                        | Push-Pull RST | 2.92                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH29Z-TK (Note 4)   | 3H29                        | Push-Pull RST | 2.92                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH26Z-T (Note 4)    | 3H26                        | Push-Pull RST | 2.63                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH26Z-T7A (Note 4)  | 3H26                        | Push-Pull RST | 2.63                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH26Z-TK (Note 4)   | 3H26                        | Push-Pull RST | 2.63                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH23Z-T (Note 4)    | 3H23                        | Push-Pull RST | 2.32                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH23Z-T7A (Note 4)  | 3H23                        | Push-Pull RST | 2.32                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |

**Ordering Information** (Continued)

| PART NUMBER<br>(Notes 1, 5) | PART<br>MARKING<br>(Note 6)                              | RESET         | NOMINAL<br>V <sub>THVDD</sub> (V) | TEMPERATURE<br>RANGE (°C) | TAPE AND REEL<br>(Units) (Note 2) | PACKAGE<br>Tape and Reel<br>(Pb-free) | PKG.<br>DWG. # |
|-----------------------------|--|---------------|-----------------------------------|---------------------------|-----------------------------------|---------------------------------------|----------------|
| ISL88003IH23Z-TK (Note 4)   | 3H23   | Push-Pull RST | 2.32                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH22Z-T (Note 4)    | 3H22   | Push-Pull RST | 2.19                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH22Z-T7A (Note 4)  | 3H22   | Push-Pull RST | 2.19                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH22Z-TK (Note 4)   | 3H22   | Push-Pull RST | 2.19                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH17Z-T (Note 4)    | 3H17   | Push-Pull RST | 1.67                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH17Z-T7A (Note 4)  | 3H17   | Push-Pull RST | 1.67                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH17Z-TK (Note 4)   | 3H17   | Push-Pull RST | 1.67                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH16Z-T (Note 4)    | 3H16   | Push-Pull RST | 1.58                              | -40 to +85                | 3k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH16Z-T7A (Note 4)  | 3H16   | Push-Pull RST | 1.58                              | -40 to +85                | 250                               | 3 Ld SOT-23                           | P3.064         |
| ISL88003IH16Z-TK (Note 4)   | 3H16   | Push-Pull RST | 1.58                              | -40 to +85                | 1k                                | 3 Ld SOT-23                           | P3.064         |
| ISL88001/2/3EVAL1Z          | Evaluation Platform for ISL88001, ISL88002, and ISL88003 |               |                                   |                           |                                   |                                       |                |

## NOTES:

- For non-standard voltage trip point versions between 1.5V and 5V in 100mV increments, please contact factory for availability.
- See [TB347](#) for details about reel specifications.
- These Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and NiPdAu plate-e4 termination finish, which is RoHS compliant and compatible with both SnPb and Pb free soldering operations. Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J-STD-020
- These Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J-STD-020.
- For Moisture Sensitivity Level (MSL), please see device information page for [ISL88001](#), [ISL88002](#), [ISL88003](#). For more information about MSL, see [TB363](#).
- The part marking is located on the bottom of the part.

**Absolute Maximum Ratings**

Voltage on Any Pin with respect to GND . . . . . -0.3V to +6.5V  
 DC Output Current . . . . . 10mA

**Recommended Operating Conditions**

Temperature Range (Industrial) . . . . . -40°C to +85°C

**Thermal Information**

Thermal Resistance (Typical, Note 7)  $\theta_{JA}$  (°C/W)  
 3 Lead SC-70 . . . . . 640  
 3 Lead SOT-23 . . . . . 590  
 Temperature Under Bias . . . . . -40°C to +125°C  
 Storage Temperature . . . . . -65°C to +150°C  
 Pb-Free Reflow Profile . . . . . see [TB493](#)

**CAUTION:** Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions can adversely impact product reliability and result in failures not covered by warranty.

## NOTE:

7.  $\theta_{JA}$  is measured with the component mounted on a high effective thermal conductivity test board in free air. See [TB379](#) for details.

**Electrical Specifications** Over the recommended operating conditions unless otherwise specified. **Boldface limits apply over the operating temperature range, -40°C to +85°C.**

| SYMBOL  | PARAMETER  | TEST CONDITIONS  | MIN (Note 8) | TYP   | MAX (Note 8) | UNITS |
|---|--|--|--------------|-------|--------------|-------|
| <b>BIAS</b>   |  |  |              |       |              |       |
| V <sub>DD</sub>   | Supply Voltage Range                             | V <sub>THVDD</sub> = 4.64V, 4.38V, 3.09V, 2.92V, 2.63V           | <b>1.8</b>   |       | <b>5.5</b>   | V     |
|   |  | V <sub>THVDD</sub> = 2.32V, 2.19V, 1.67V, 1.58V                  | <b>1.8</b>   |       | <b>2.75</b>  | V     |
| I <sub>DD</sub>   | Supply Current (RESET, RESET open)               | V <sub>DD</sub> = 5.0V, V <sub>THVDD</sub> = 4.64V, 4.38V        |              | 215   | <b>400</b>   | nA    |
|   |  | V <sub>DD</sub> = 3.3V, V <sub>THVDD</sub> = 3.09V, 2.92V, 2.63V |              | 200   | <b>350</b>   | nA    |
|   |  | V <sub>DD</sub> = 2.5V, V <sub>THVDD</sub> = 2.32V, 2.19V        |              | 175   | <b>325</b>   | nA    |
|   |  | V <sub>DD</sub> = 1.8V, V <sub>THVDD</sub> = 1.67V, 1.58V        |              | 160   | <b>300</b>   | nA    |
| <b>VOLTAGE THRESHOLD</b>                                    |  |  |              |       |              |       |
| V <sub>THVDD</sub>  | Falling Fixed V <sub>DD</sub> Voltage Trip Point | ISL88001, 88002, 88003Ix <b>46</b> , T <sub>A</sub> = +25°C      | 4.570        | 4.625 | 4.681        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>46</b>                               | <b>4.500</b> |       | <b>4.750</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>44</b> , T <sub>A</sub> = +25°C      | 4.327        | 4.380 | 4.433        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>44</b>                               | <b>4.262</b> |       | <b>4.498</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>31</b> , T <sub>A</sub> = +25°C      | 3.038        | 3.075 | 3.112        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>31</b>                               | <b>3.000</b> |       | <b>3.150</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>29</b> , T <sub>A</sub> = +25°C      | 2.890        | 2.925 | 2.960        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>29</b>                               | <b>2.850</b> |       | <b>3.000</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>26</b> , T <sub>A</sub> = +25°C      | 2.598        | 2.630 | 2.662        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>26</b>                               | <b>2.559</b> |       | <b>2.701</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>23</b> , T <sub>A</sub> = +25°C      | 2.292        | 2.320 | 2.348        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>23</b>                               | <b>2.257</b> |       | <b>2.383</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>22</b> , T <sub>A</sub> = +25°C      | 2.164        | 2.190 | 2.216        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>22</b>                               | <b>2.131</b> |       | <b>2.249</b> | V     |
|   |  | ISL88001, 88002, 88003Ix <b>17</b> , T <sub>A</sub> = +25°C      | 1.650        | 1.670 | 1.690        | V     |
|   |  | ISL88001, 88002, 88003Ix <b>17</b>                               | <b>1.625</b> |       | <b>1.715</b> | V     |
| ISL88001, 88002, 88003Ix <b>16</b> , T <sub>A</sub> = +25°C | 1.561  | 1.580  | 1.599        | V     |              |       |
| ISL88001, 88002, 88003Ix <b>16</b>                          | <b>1.537</b>                                     |  | <b>1.623</b> | V     |              |       |
| V <sub>THVDDHYST</sub>                                      | Hysteresis at V <sub>DD</sub> Input              |  |              | 1     |              | %     |
| T <sub>VTHVDD</sub>   | V <sub>THVDD</sub> Temperature Coefficient       |  |              | 0.48  |              | mV/°C |

**Electrical Specifications** Over the recommended operating conditions unless otherwise specified. (Continued) **Boldface limits apply over the operating temperature range, -40°C to +85°C.**

| SYMBOL               | PARAMETER                               | TEST CONDITIONS   | MIN (Note 8)                | TYP                   | MAX (Note 8) | UNITS |
|----------------------|---|---|-----------------------------|-----------------------|--------------|-------|
| <b>RESET / RESET</b> |   |   |                             |                       |              |       |
| V <sub>OL</sub>      | Reset Output Voltage Low                | V <sub>DD</sub> < V <sub>THVDD</sub> , for ISL88001               |                             | 0.2                   | <b>0.40</b>  | V     |
|                      |   | V <sub>DD</sub> < V <sub>THVDD</sub> , Sinking 0.5mA for ISL88002 |                             | 0.2                   | <b>0.40</b>  | V     |
|                      |   | V <sub>DD</sub> > V <sub>THVDD</sub> , for ISL88003               |                             | 0.2                   | <b>0.40</b>  | V     |
| V <sub>OH</sub>      | Reset Output Voltage High               | V <sub>DD</sub> > V <sub>THVDD</sub> , for ISL88001               | <b>V<sub>DD</sub> - 0.4</b> | V <sub>DD</sub> - 0.2 |              | V     |
|                      |   | V <sub>DD</sub> > V <sub>THVDD</sub> , Sourcing 0.5mA, ISL88002   |                             | V <sub>DD</sub> - 0.2 |              | V     |
|                      |   | V <sub>DD</sub> < V <sub>THVDD</sub> , for ISL88003               | <b>V<sub>DD</sub> - 0.4</b> | V <sub>DD</sub> - 0.2 |              | V     |
| t <sub>RPD</sub>     | V <sub>TH</sub> to Reset Asserted Delay |   |                             | 15                    |              | μs    |
| t <sub>POR</sub>     | POR Timeout Delay                       |   | <b>140</b>                  | 200                   | <b>260</b>   | ms    |
| C <sub>LOAD</sub>    | Load Capacitance on Reset Pin           |   |                             | 5                     |              | pF    |

## NOTE:

8. Parameters with MIN and/or MAX limits are 100% tested at +25°C, unless otherwise specified. Temperature limits established by characterization and are not production tested.

## Pin Descriptions

### RST

The ISL88003 push-pull RST output is set to V<sub>DD</sub> (HIGH) whenever the device is first powered up or V<sub>DD</sub> falls below its respective minimum voltage sense level.

### $\overline{\text{RST}}$

The  $\overline{\text{RST}}$  output functions identically to the complementary RST output. On the ISL88001, this is a push-pull output. On the ISL88002, it is an open drain output that is pulled to GND (LOW) when reset is asserted. Suggested pull-up  $\overline{\text{RST}}$  resistor values are in the range of 5kΩ to 100kΩ.

### V<sub>DD</sub>

The V<sub>DD</sub> pin is the power supply terminal. The voltage at this pin is compared against an internal factory-programmed voltage trip point, V<sub>THVDD</sub>. A reset is first asserted when the device is initially powered up to ensure that the power supply has stabilized. Thereafter, reset is again asserted whenever V<sub>DD</sub> falls below V<sub>THVDD</sub>. The device is designed with hysteresis to help prevent chattering due to noise.


## Principles of Operation

The ISL88001, ISL88002, ISL88003 devices provide a low power, high accuracy solution for those voltage monitoring applications needing supply voltage supervision with power reset control. By integrating these features into small 3 Ld SC-70 and 3 Ld SOT-23 packages and consuming as little as 160nA of supply current, these devices can lower system cost and reduce board space requirements.

### Low Voltage Monitoring

During normal operation, the ISL88001, ISL88002, ISL88003 devices monitor the voltage level of V<sub>DD</sub>. The device asserts a

reset signal ( $\overline{\text{RST}}$  = LOW or RST = HIGH) to a μP/μC if this voltage is less than the preset voltage trip point. The reset signal prevents system operation during a power failure or brownout condition. This reset signal remains asserted until V<sub>DD</sub> exceeds the voltage threshold setting for the reset time delay period t<sub>POR</sub>. See Figure 2.

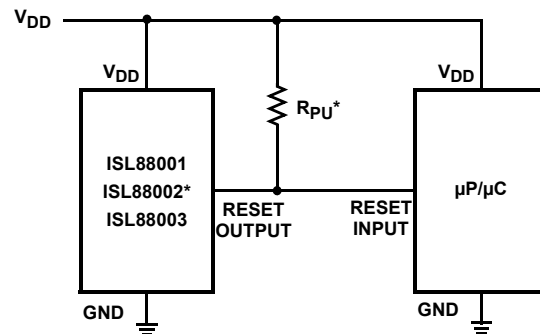

\*Necessary for ISL88002

FIGURE 1. TYPICAL APPLICATION DIAGRAM

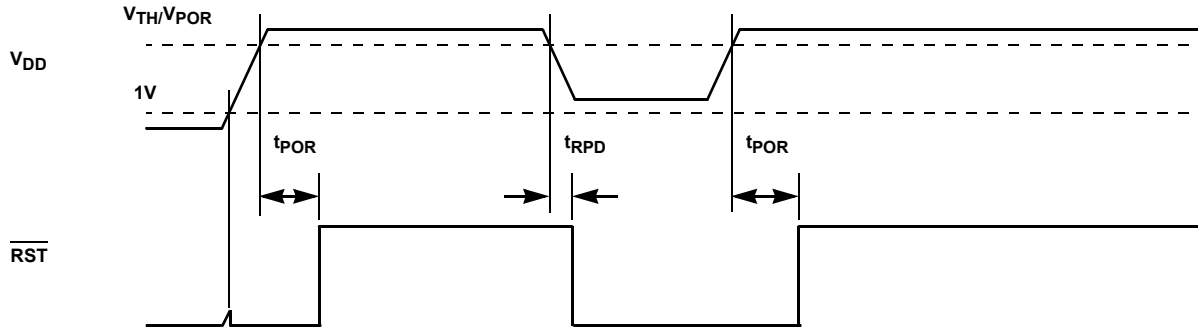


FIGURE 2. VOLTAGE MONITORING TIMING DIAGRAM

**Power-On Reset (POR)**

Applying power to the ISL88001, ISL88002, ISL88003 activates a POR circuit, which asserts reset once  $V_{DD} = 1V$ . (i.e.  $\overline{RST}$  goes LOW). This provides several benefits:

- It prevents the system microprocessor from starting to operate with insufficient voltage.
- It prevents the processor from operating prior to stabilization of the oscillator.
- It ensures that the monitored device is held out of operation until internal registers are properly loaded.
- It allows time for an FPGA to download its configuration prior to initialization of the circuit.

The reset signal remains asserted until  $V_{DD}$  rises above the minimum voltage sense level for time period  $t_{POR}$ . This ensures that the  $V_{DD}$  voltage has stabilized.

Optional  $V_{DD}$  de-coupling capacitance can be added to filter transients if needed.

See Figures 13 and 14 illustrating the available evaluation platform, ISL88001/2/3EVAL1Z. This evaluation board is shipped with the many released variants loosely packed and the 4.6V threshold variants mounted for immediate evaluation.

**Parametric Performance**

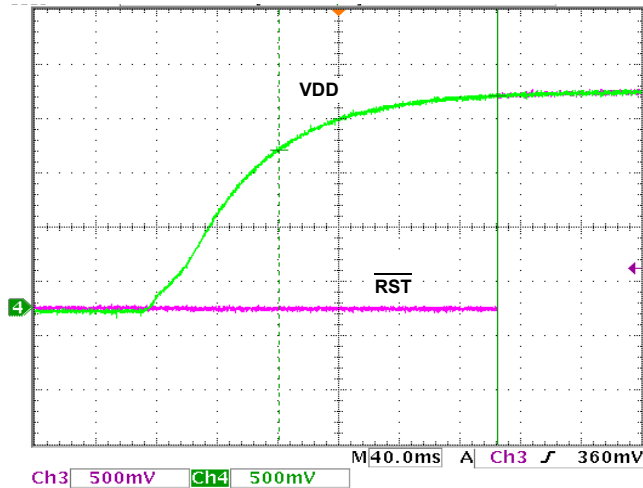


FIGURE 3. ISL88001  $\overline{RST}$   $t_{POR}$  ~144ms

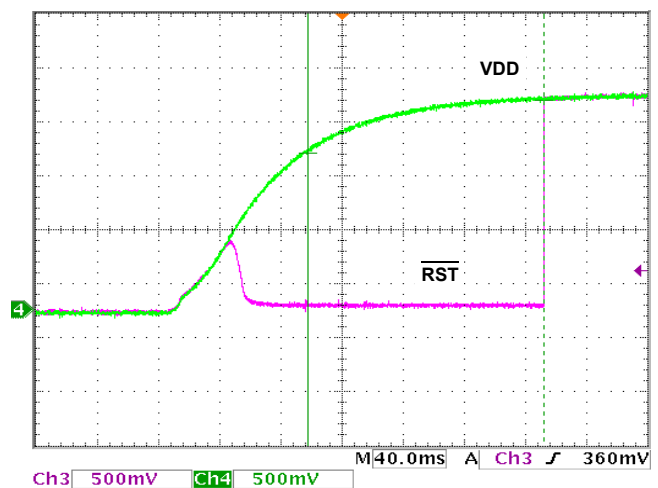


FIGURE 4. ISL88002  $\overline{RST}$   $t_{POR}$  ~155ms,  $R_{PU} = 5k\Omega$

**Parametric Performance** (Continued)

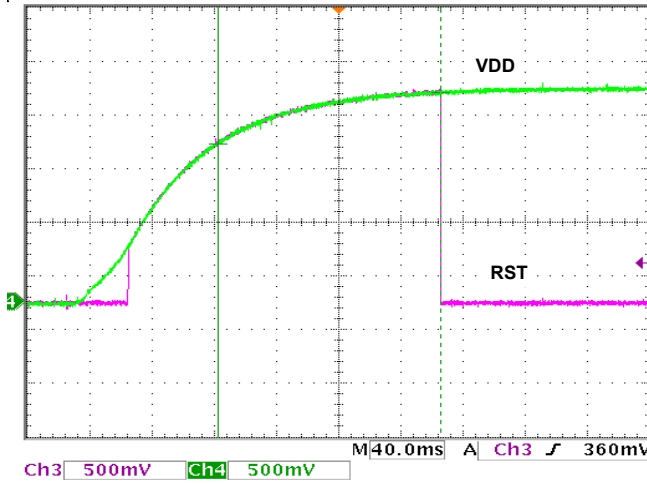


FIGURE 5. ISL88003 RST  $t_{POR}$  ~145ms

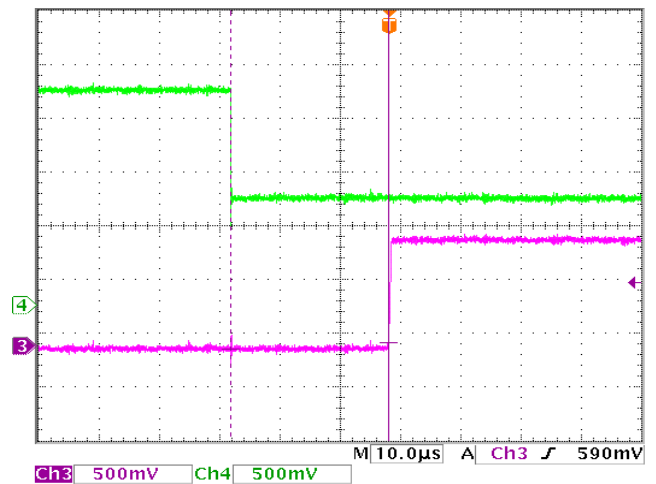


FIGURE 6. ISL88003  $t_{PRD}$  ~26µs

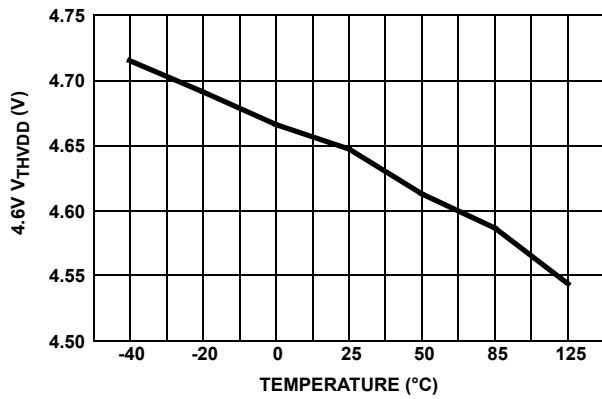


FIGURE 7. ISL8800x 4.6V  $V_{THVDD}$  vs TEMPERATURE

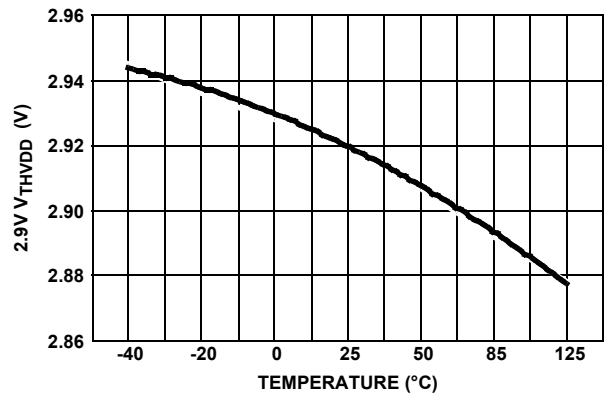


FIGURE 8. ISL8800x 2.9V  $V_{THVDD}$  vs TEMPERATURE

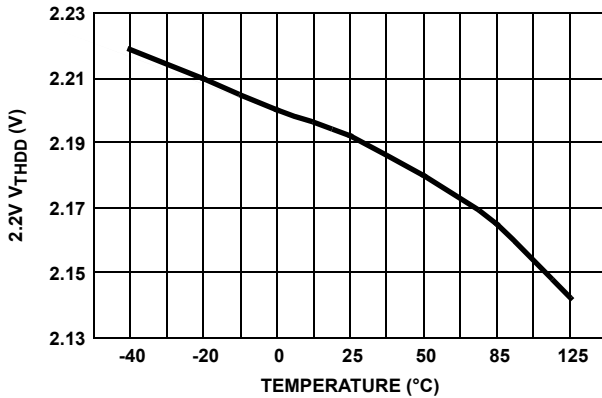


FIGURE 9. ISL8800x 2.2V  $V_{THVDD}$  vs TEMPERATURE

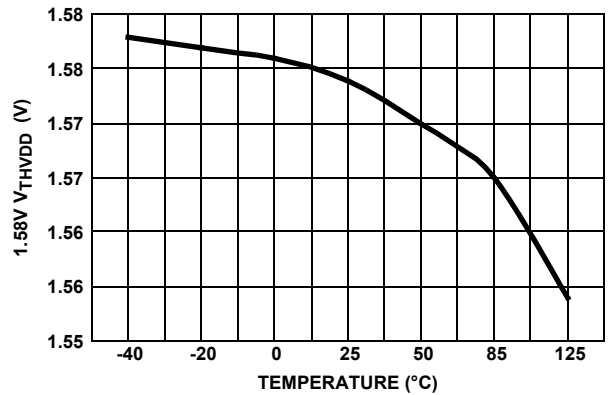


FIGURE 10. ISL8800x 1.58V  $V_{THVDD}$  vs TEMPERATURE

**Parametric Performance (Continued)**

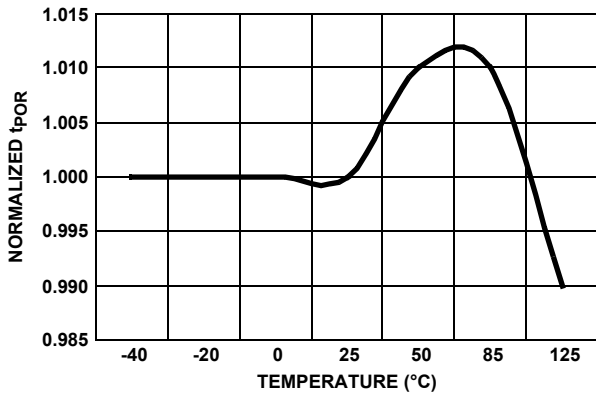


FIGURE 11. ISL8800x NORMALIZED +25°C  $t_{POR}$  vs TEMPERATURE

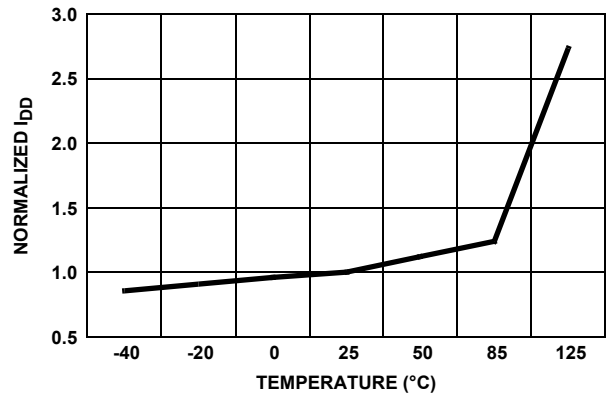


FIGURE 12. ISL8800x NORMALIZED +25°C  $I_{DD}$  vs TEMPERATURE

**ISL88001/2/3EVAL1Z Evaluation Platform**

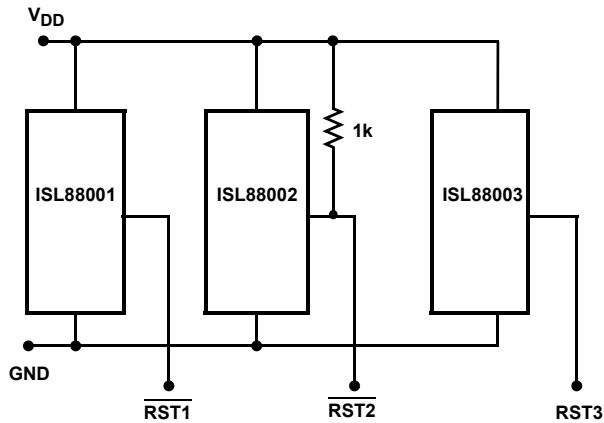


FIGURE 13. ISL88001/2/3EVAL1Z SCHEMATIC

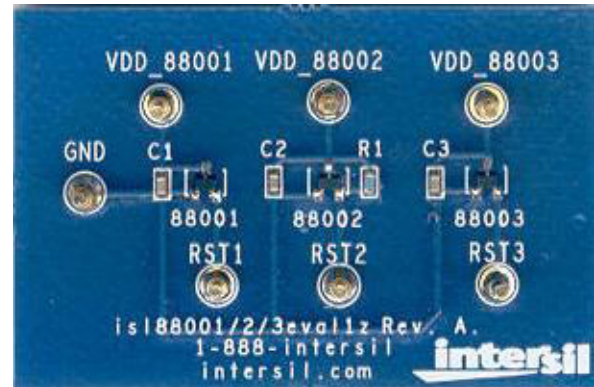



FIGURE 14. ISL88001/2/3EVAL1Z PHOTOGRAPH

**Revision History**



| Rev. | Date         | Description  |
|------|--------------|--|
| 3.0  | Feb 10, 2021 | Added Note 3 to show the change in termination finish from Matte Sn to NiPdAu.<br>Updated Note 2 and added the tape and reel options and information to the ordering information table.<br>Updated links throughout.<br>Added Revision History |

### Package Outline Drawings


P3.064  
 3 Lead Small Outline Transistor Plastic Package (SOT23-3)  
 Rev 3, 3/12

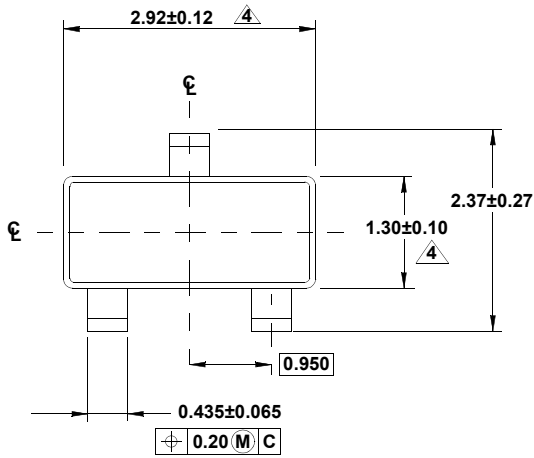


**TOP VIEW**

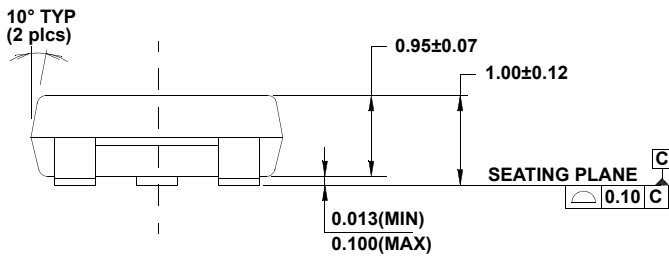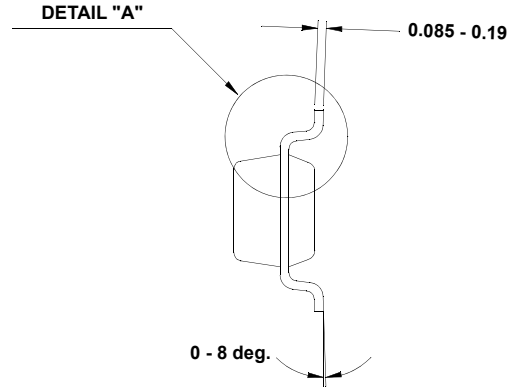

**SIDE VIEW**

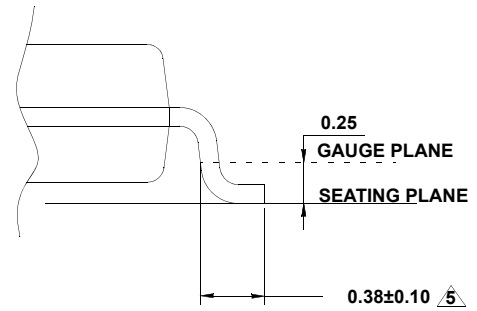


**DETAIL "A"**

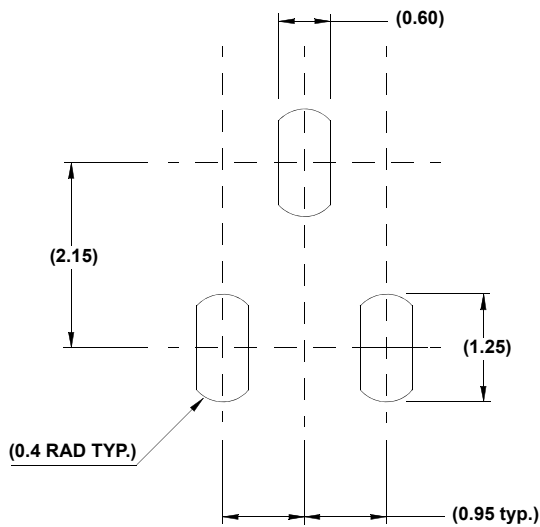

**TYPICAL RECOMMENDED LAND PATTERN**

**NOTES:**

1. Dimensions are in millimeters. Dimensions in ( ) for Reference Only.
2. Dimensioning and tolerancing conform to AMSEY14.5m-1994.
3. Reference JEDEC TO-236.
4. Dimension does not include interlead flash or protrusions. Interlead flash or protrusions shall not exceed 0.25mm per side.
5. Footlength is measured at reference to gauge plane.

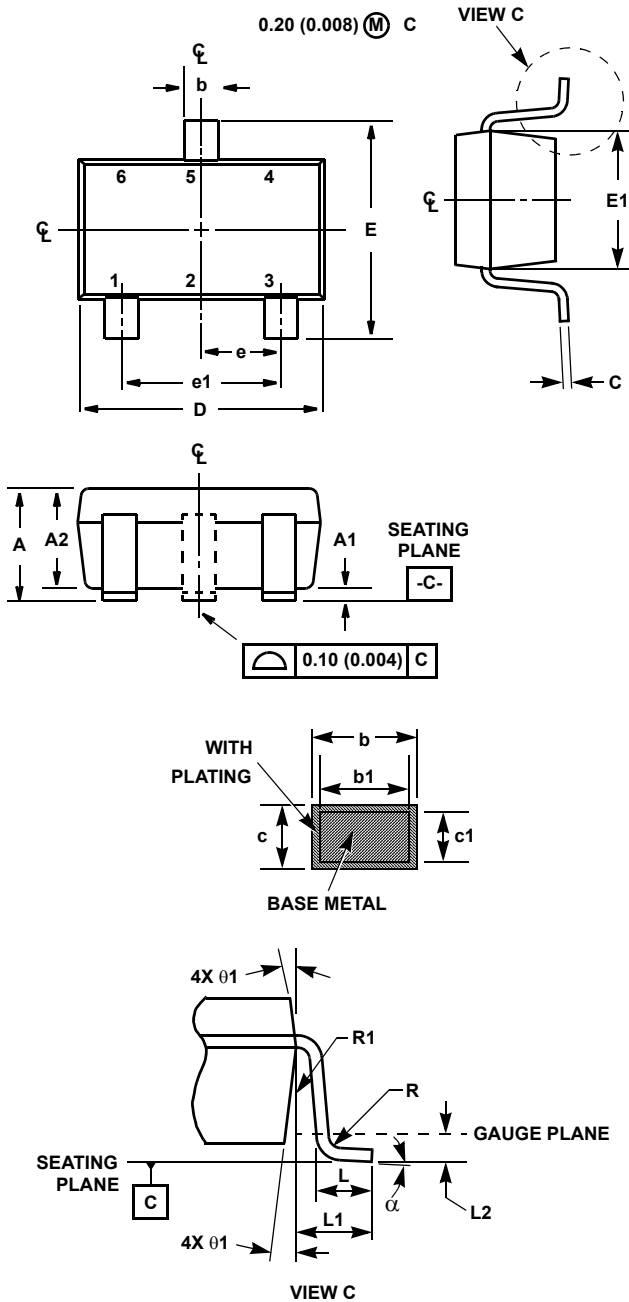


P3.049  
3 Lead Small Outline Transistor Plastic Package (SC70-3)

| SYMBOL   | INCHES     |       | MILLIMETERS |      | NOTES |
|----------|------------|-------|-------------|------|-------|
|          | MIN        | MAX   | MIN         | MAX  |       |
| A        | 0.031      | 0.043 | 0.80        | 1.10 | -     |
| A1       | 0.000      | 0.004 | 0.00        | 0.10 | -     |
| A2       | 0.031      | 0.039 | 0.80        | 1.00 | -     |
| b        | 0.009      | 0.016 | 0.25        | 0.40 | -     |
| b1       | 0.009      | 0.014 | 0.25        | 0.35 |       |
| c        | 0.004      | 0.007 | 0.10        | 0.18 | 6     |
| c1       | 0.004      | 0.007 | 0.10        | 0.16 | 6     |
| D        | 0.071      | 0.087 | 1.80        | 2.20 | 3     |
| E        | 0.071      | 0.094 | 1.80        | 2.40 | -     |
| E1       | 0.045      | 0.053 | 1.15        | 1.35 | 3     |
| e        | 0.0256 Ref |       | 0.65 Ref    |      | -     |
| e1       | 0.0512 Ref |       | 1.30 Ref    |      | -     |
| L        | 0.010      | 0.018 | 0.26        | 0.46 | 4     |
| L1       | 0.017 Ref. |       | 0.420 Ref.  |      | -     |
| L2       | 0.006 BSC  |       | 0.15 BSC    |      |       |
| $\alpha$ | 0°         | 8°    | 0°          | 8°   | -     |
| N        | 3          |       | 3           |      | 5     |
| R        | 0.004      | -     | 0.10        | -    |       |
| R1       | 0.004      | 0.010 | 0.15        | 0.25 |       |

Rev. 0 11/06

NOTES:

1. Dimensioning and tolerances per ASME Y14.5M-1994.
2. Package conforms to EIAJ SC70 and JEDEC MO-203AA.
3. Dimensions D and E1 are exclusive of mold flash, protrusions, or gate burrs.
4. Footlength L measured at reference to gauge plane.
5. "N" is the number of terminal positions.
6. These Dimensions apply to the flat section of the lead between 0.08mm and 0.15mm from the lead tip.
7. Controlling dimension: MILLIMETER. Converted inch dimensions are for reference only.

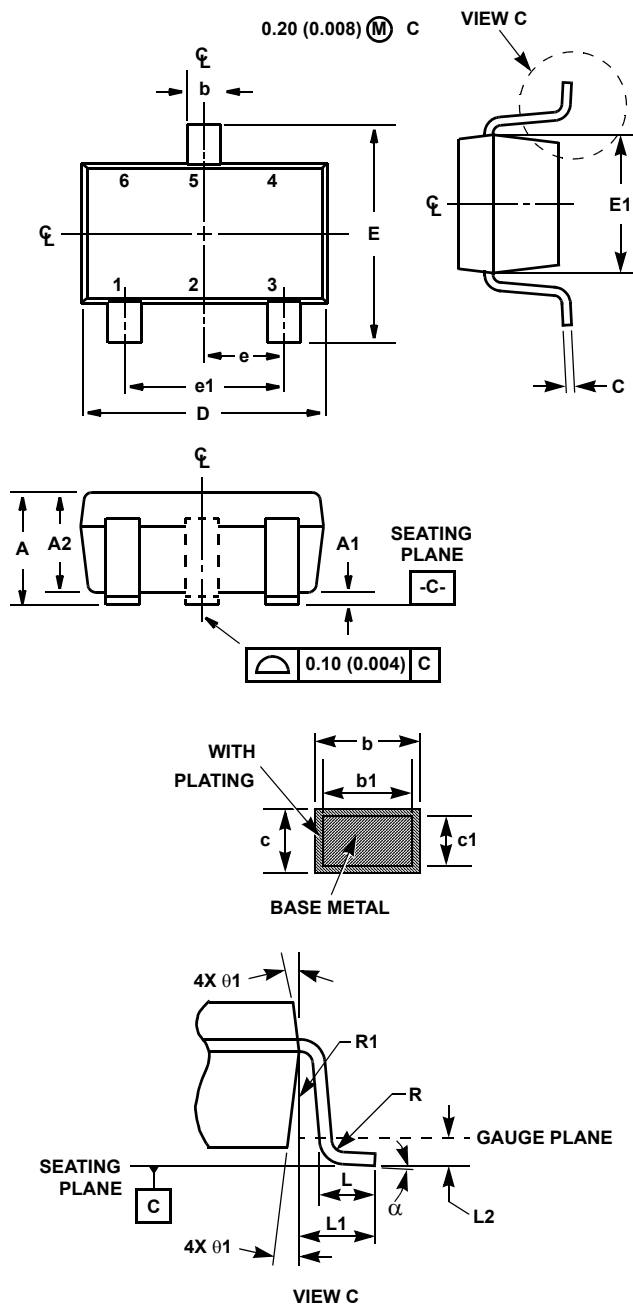

### P3.049

#### 3 Lead Small Outline Transistor Plastic Package (SC70-3)

| SYMBOL   | INCHES     |       | MILLIMETERS |      | NOTES |
|----------|------------|-------|-------------|------|-------|
|          | MIN        | MAX   | MIN         | MAX  |       |
| A        | 0.031      | 0.043 | 0.80        | 1.10 | -     |
| A1       | 0.000      | 0.004 | 0.00        | 0.10 | -     |
| A2       | 0.031      | 0.039 | 0.80        | 1.00 | -     |
| b        | 0.009      | 0.016 | 0.25        | 0.40 | -     |
| b1       | 0.009      | 0.014 | 0.25        | 0.35 |       |
| c        | 0.004      | 0.007 | 0.10        | 0.18 | 6     |
| c1       | 0.004      | 0.007 | 0.10        | 0.16 | 6     |
| D        | 0.071      | 0.087 | 1.80        | 2.20 | 3     |
| E        | 0.071      | 0.094 | 1.80        | 2.40 | -     |
| E1       | 0.045      | 0.053 | 1.15        | 1.35 | 3     |
| e        | 0.0256 Ref |       | 0.65 Ref    |      | -     |
| e1       | 0.0512 Ref |       | 1.30 Ref    |      | -     |
| L        | 0.010      | 0.018 | 0.26        | 0.46 | 4     |
| L1       | 0.017 Ref. |       | 0.420 Ref.  |      | -     |
| L2       | 0.006 BSC  |       | 0.15 BSC    |      |       |
| $\alpha$ | 0°         | 8°    | 0°          | 8°   | -     |
| N        | 3          |       | 3           |      | 5     |
| R        | 0.004      | -     | 0.10        | -    |       |
| R1       | 0.004      | 0.010 | 0.15        | 0.25 |       |

Rev. 0 11/06

**NOTES:**

1. Dimensioning and tolerances per ASME Y14.5M-1994.
2. Package conforms to EIAJ SC70 and JEDEC MO-203AA.
3. Dimensions D and E1 are exclusive of mold flash, protrusions, or gate burrs.
4. Footlength L measured at reference to gauge plane.
5. "N" is the number of terminal positions.
6. These Dimensions apply to the flat section of the lead between 0.08mm and 0.15mm from the lead tip.
7. Controlling dimension: MILLIMETER. Converted inch dimensions are for reference only.

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information



For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ISL88003IH31Z-T on WIN SOURCE](#)
-  [Renesas Electronics America](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management