



THE DATASHEET OF LMX324AUD





Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

General Description

The LMX321/LMX358/LMX324 are single/dual/quad, low-cost, low-voltage, pin-to-pin compatible upgrades to the LMV321/LMV358/LMV324 family of general purpose op amps. These devices offer rail-to-rail outputs and an input common-mode range that extends below ground. These op amps draw only 105 μ A of quiescent current per amplifier, operate from a single +2.3V to +7V supply, and drive 2k Ω resistive loads to within 40mV of either rail. The LMX321/LMX358/LMX324 are unity-gain stable with a 1.3MHz gain-bandwidth product capable of driving capacitive loads up to 400pF. The combination of low voltage, low cost, and small package size makes these amplifiers ideal for portable/battery-powered equipment.

The LMX321 single op amp is available in ultra-small 5-pin SC70 and space-saving 5-pin SOT23 packages. The LMX358 dual op amp is available in the tiny 8-pin SOT23 or the 8-pin μ MAX[®] package. The LMX324 quad op amp is available in 14-pin TSSOP and SO packages.

Applications

Cellular Phones
Laptops
Low-Power, Low-Voltage Applications
Portable/Battery-Powered Equipment
Cordless Phones
Active Filters

Features


- ◆ Upgrade to LMV321/LMV358/LMV324 Family
- ◆ Single +2.3V to +7V Supply Voltage Range
- ◆ Available in Space-Saving Packages
 - 5-Pin SC70 (LMX321)
 - 8-Pin SOT23 (LMX358)
 - 14-Pin TSSOP (LMX324)
- ◆ 1.3MHz Gain-Bandwidth Product
- ◆ 105 μ A Quiescent Current per Amplifier ($V_{CC} = +2.7V$)
- ◆ No Phase Reversal for Overdriven Inputs
- ◆ No Crossover Distortion
- ◆ Rail-to-Rail Output Swing
- ◆ Input Common-Mode Voltage Range: $V_{EE} - 0.2V$ to $V_{CC} - 0.8V$
- ◆ Drives 2k Ω Resistive Loads

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE | PKG CODE |
|-------------|-----------------|---------------|----------|
| LMX321AXK-T | -40°C to +125°C | 5 SC70-5 | X5-1 |
| LMX321AUK-T | -40°C to +125°C | 5 SOT23-5 | U5-1 |
| LMX358AKA-T | -40°C to +125°C | 8 SOT23-8 | K8-2 |
| LMX358ASA | -40°C to +125°C | 8 SO | S8-2 |
| LMX358AUA-T | -40°C to +125°C | 8 μ MAX-8 | U8-1 |
| LMX324ASD | -40°C to +125°C | 14 SO | S14-4 |
| LMX324AUD | -40°C to +125°C | 14 TSSOP | U14-1 |

Selector Guide appears at end of data sheet.

Pin Configurations

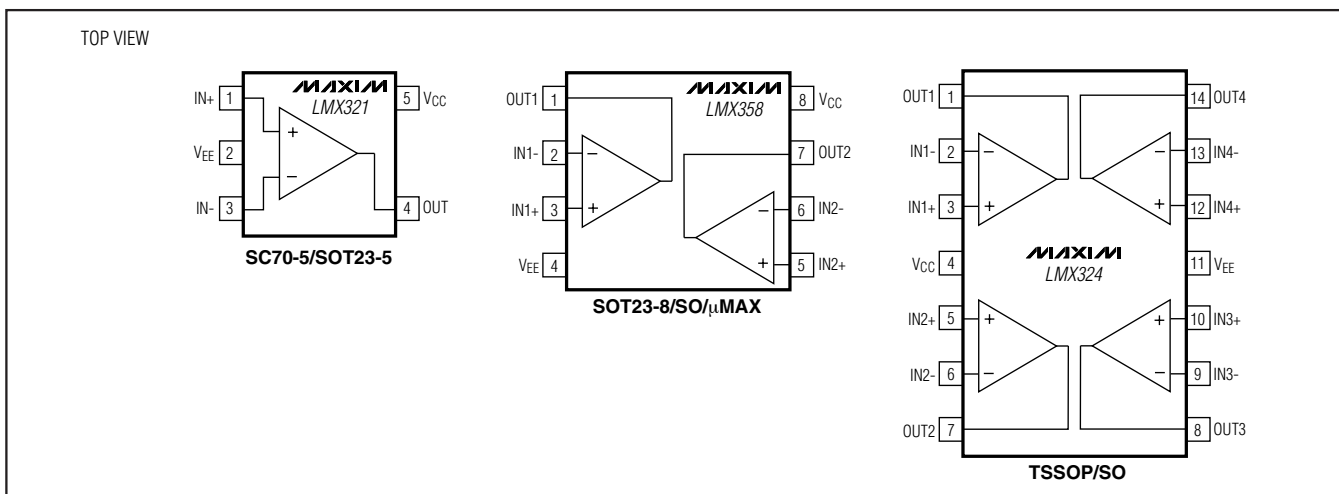

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

ABSOLUTE MAXIMUM RATINGS

| | | | |
|---|------------------------------------|--|-----------------|
| Supply Voltage (V _{CC} to V _{EE}) | -0.3V to +8V | 8-Pin SO (derate 5.9mW/°C above +70°C) | 471mW |
| Differential Input Voltage (V _{IN+} - V _{IN-}) | V _{EE} to V _{CC} | 8-Pin μMAX (derate 4.5mW/°C above +70°C) | 362mW |
| OUT ₋ to V _{EE} | -0.3V to (V _{CC} + 0.3V) | 14-Pin TSSOP (derate 9.1mW/°C above +70°C) | 727mW |
| Output Short-Circuit Duration | | 14-Pin SO (derate 8.3mW/°C above +70°C) | 667mW |
| OUT ₋ Shorted to V _{CC} or V _{EE} | Continuous | Operating Temperature Range | -40°C to +125°C |
| Continuous Power Dissipation (T _A = +70°C) | | Junction Temperature | +150°C |
| 5-Pin SC70-5 (derate 3.1mW/°C above +70°C) | 247mW | Storage Temperature Range | -65°C to +150°C |
| 5-Pin SOT23-5 (derate 7.1mW/°C above +70°C) | 571mW | Lead Temperature (soldering, 10s) | +300°C |
| 8-Pin SOT23-8 (derate 7.52mW/°C above +70°C) | 602mW | | |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = +2.7V, V_{EE} = 0V, V_{OUT} = V_{CC}/2, V_{CM} = 1V, R_L > 1MΩ, T_A = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------------|-------------------|--|-----------------------------------|------|------|---------|
| DC CHARACTERISTICS | | | | | | |
| Input Offset Voltage | V _{OS} | | | 1 | 6 | mV |
| Input Offset Voltage Average Drift | TCV _{OS} | | | 6 | | μV/°C |
| Input Bias Current | I _B | | | 18 | 50 | nA |
| Input Offset Current | I _{OS} | | | 1 | 8 | nA |
| Common-Mode Rejection Ratio | CMRR | -0.2V < V _{CM} < 1.8V | 72 | 92 | | dB |
| Power-Supply Rejection Ratio | PSRR | 2.3V ≤ V _{CC} ≤ 7V, V _{OUT} = 1V | 82 | 96 | | dB |
| Input Common-Mode Voltage Range | V _{CM} | For CMRR ≥ 72dB | Limit | -0.2 | +1.8 | V |
| | | | Typ | -0.2 | +1.9 | |
| Large-Signal Voltage Gain | A _{VOL} | R _L = 2kΩ to V _{EE} , 0.3V < V _{OUT} < 2.4V | 20 | 120 | | V/mV |
| Output-Voltage Swing | V _{OUT} | R _L = 10kΩ to 1.35V | V _{CC} - V _{OH} | 12 | 50 | mV |
| | | | V _{OL} | 10 | 40 | |
| | | R _L = 2kΩ to 1.35V | V _{CC} - V _{OH} | 40 | 110 | |
| | | | V _{OL} | 25 | 60 | |
| Supply Current | I _{CC} | LMX321 (single) | | 105 | 150 | μA |
| | | LMX358 (dual) | | 210 | 300 | |
| | | LMX324 (quad) | | 420 | 600 | |
| AC CHARACTERISTICS | | | | | | |
| Slew Rate | SR | 1V step Input | | 1 | | V/μs |
| Gain-Bandwidth Product | GBW | C _L = 200pF | | 1.3 | | MHz |
| Phase Margin | φ _M | | | 64 | | degrees |
| Gain Margin | GM | | | 24 | | dB |
| Input Noise-Voltage Density | e _n | f = 1kHz | | 66 | | nV/√Hz |
| Input Current-Noise Density | i _n | f = 1kHz | | 0.13 | | pA/√Hz |

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

LMX321/LMX358/LMX324

ELECTRICAL CHARACTERISTICS

($V_{CC} = +2.7V$, $V_{EE} = 0V$, $V_{OUT} = V_{CC}/2$, $V_{CM} = 1V$, $R_L > 1M\Omega$, $T_A = -40^{\circ}C$ to $+125^{\circ}C$, unless otherwise noted.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------|-----------|--|-------------------|------|------|---------|
| DC CHARACTERISTICS | | | | | | |
| Input Offset Voltage | V_{OS} | | | | 9 | mV |
| Input Bias Current | I_B | | | | 70 | nA |
| Input Offset Current | I_{OS} | | | | 15 | nA |
| Common-Mode Rejection Ratio | CMRR | $-0.1 < V_{CM} < +1.7V$ | 60 | | | dB |
| Power-Supply Rejection Ratio | PSRR | $2.3V \leq V_{CC} \leq 7V$, $V_{OUT} = 1V$ | 75 | | | dB |
| Input Common-Mode Voltage Range | V_{CM} | For CMRR ≥ 60 dB | Limit | -0.1 | +1.7 | V |
| | | | Typ | -0.1 | +1.8 | |
| Large-Signal Voltage Gain | A_{VOL} | $R_L = 2k\Omega$ to V_{EE} , $0.3V \leq V_{OUT} \leq 2.4V$ | 10 | | | V/mV |
| Output-Voltage Swing | V_{OUT} | $R_L = 10k\Omega$ to 1.55V | $V_{CC} - V_{OH}$ | | 130 | mV |
| | | | V_{OL} | | 50 | |
| | | $R_L = 2k\Omega$ to 1.35V | $V_{CC} - V_{OH}$ | | 150 | |
| | | | V_{OL} | | 70 | |
| Supply Current | I_{CC} | LMX321 (single) | | | 180 | μA |
| | | LMX358 (dual) | | | 360 | |
| | | LMX324 (quad) | | | 720 | |

ELECTRICAL CHARACTERISTICS

($V_{CC} = +5V$, $V_{EE} = 0V$, $V_{OUT} = V_{CC}/2$, $V_{CM} = 2V$, $R_L > 1M\Omega$, $T_A = +25^{\circ}C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------------|-------------|---|-------|------|------|-------------------|
| DC CHARACTERISTICS | | | | | | |
| Input Offset Voltage | V_{OS} | | | 1 | 6 | mV |
| Input Offset Voltage Average Drift | TCV_{OS} | | | 6 | | $\mu V/^{\circ}C$ |
| Input Bias Current | I_B | | | 18 | 50 | nA |
| Input Offset Current | I_{OS} | | | 1 | 8 | nA |
| Input Differential Clamp Voltage | V_{CLAMP} | Force 100 μA into $IN+$, $IN-$ = GND measure $V_{IN+} - V_{IN-}$, Figure 1 | | 3.1 | | V |
| Common-Mode Rejection Ratio | CMRR | $-0.2 < V_{CM} < +4.1V$ | 72 | 92 | | dB |
| Power-Supply Rejection Ratio | PSRR | $2.3V \leq V_{CC} \leq 7V$, $V_{OUT} = 1V$, $V_{CM} = 1V$ | 82 | 96 | | dB |
| Input Common-Mode Voltage Range | V_{CM} | For CMRR ≥ 72 dB | Limit | -0.2 | +4.1 | V |
| | | | Typ | -0.2 | +4.2 | |
| Large-Signal Voltage Gain | A_{VOL} | $R_L = 2k\Omega$ to V_{EE} , $0.3V \leq V_{OUT} \leq 4.7V$ | 40 | 200 | | V/mV |

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = +5V$, $V_{EE} = 0V$, $V_{OUT} = V_{CC}/2$, $V_{CM} = 2V$, $R_L > 1M\Omega$, $T_A = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------|-----------|---------------------------|-------------------|------|-----|----------------|
| Output-Voltage Swing | V_{OUT} | $R_L = 10k\Omega$ to 2.5V | $V_{CC} - V_{OH}$ | 20 | 60 | mV |
| | | | V_{OL} | 12 | 40 | |
| | | $R_L = 2k\Omega$ to 2.5V | $V_{CC} - V_{OH}$ | 65 | 130 | |
| | | | V_{OL} | 40 | 80 | |
| Output Short-Circuit Current | I_{SC} | Sourcing, $V_{OUT} = 0V$ | 5 | 25 | mA | |
| | | Sinking, $V_{OUT} = 5V$ | 10 | 28 | | |
| Supply Current | I_{CC} | LMX321 (single) | | 120 | 170 | μA |
| | | LMX358 (dual) | | 240 | 340 | |
| | | LMX324 (quad) | | 480 | 680 | |
| AC CHARACTERISTICS | | | | | | |
| Slew Rate | SR | 3V step input | | 1 | | V/ μs |
| Gain-Bandwidth Product | GBW | $C_L = 200pF$ | | 1.3 | | MHz |
| Phase Margin | ϕ_M | | | 65 | | degrees |
| Gain Margin | GM | | | 25 | | dB |
| Input Noise-Voltage Density | e_n | $f = 1kHz$ | | 65 | | nV/\sqrt{Hz} |
| Input Noise-Current Density | i_n | $f = 1kHz$ | | 0.13 | | pA/\sqrt{Hz} |

ELECTRICAL CHARACTERISTICS

($V_{CC} = +5V$, $V_{EE} = 0V$, $V_{OUT} = V_{CC}/2$, $V_{CM} = 2V$, $R_L > 1M\Omega$, $T_A = -40^\circ C$ to $+125^\circ C$, unless otherwise noted.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------|-----------|--|-------------------|------|------|---------|
| DC CHARACTERISTICS | | | | | | |
| Input Offset Voltage | V_{OS} | | | | 9 | mV |
| Input Bias Current | I_B | | | | 70 | nA |
| Input Offset Current | I_{OS} | | | | 15 | nA |
| Common-Mode Rejection Ratio | CMRR | $-0.1 < V_{CM} < +4.0V$ | 63 | | | dB |
| Power-Supply Rejection Ratio | PSRR | $2.3V \leq V_{CC} \leq 7V$, $V_{OUT} = 1V$, $V_{CM} = 1V$ | 75 | | | dB |
| Input Common-Mode Voltage Range | V_{CM} | For CMRR $\geq 63dB$ | Limit | -0.1 | +4.0 | V |
| | | | Typ | -0.1 | +4.1 | |
| Large-Signal Voltage Gain | A_{VOL} | $R_L = 2k\Omega$ to V_{EE} , $0.3V \leq V_{OUT} \leq 4.7V$ | 20 | | | V/mV |
| Output-Voltage Swing | V_{OUT} | $R_L = 10k\Omega$ to 2.5V | $V_{CC} - V_{OH}$ | | 170 | mV |
| | | | V_{OL} | | 70 | |
| | | $R_L = 2k\Omega$ to 2.5V | $V_{CC} - V_{OH}$ | | 190 | |
| | | | V_{OL} | | 90 | |
| Supply Current | I_{CC} | LMX321 (single) | | | 210 | μA |
| | | LMX358 (dual) | | | 420 | |
| | | LMX324 (quad) | | | 840 | |










Note 1: Specifications are 100% tested at $T_A = +25^\circ C$ (exceptions noted). All temperature limits are guaranteed by design.

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, $V_{EE} = 0\text{V}$, unless otherwise noted.)










LMX321/LMX358/LMX324

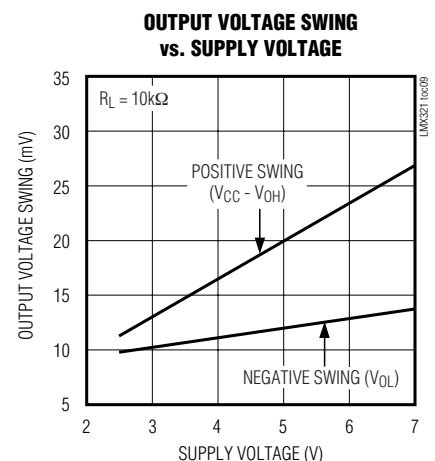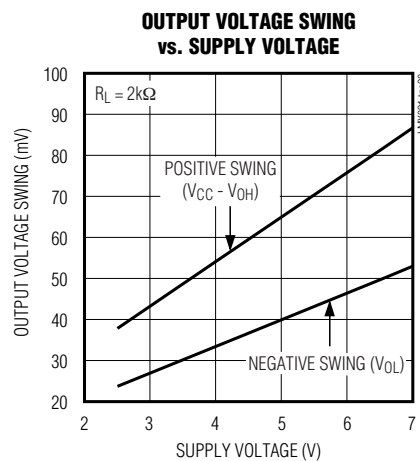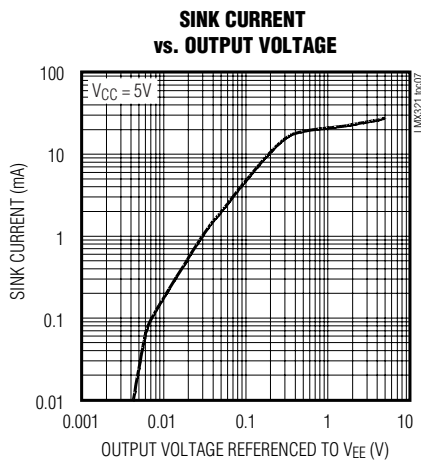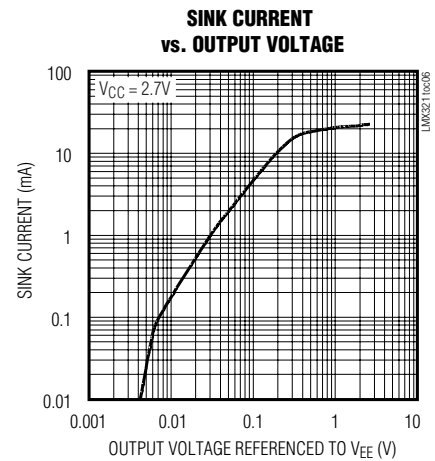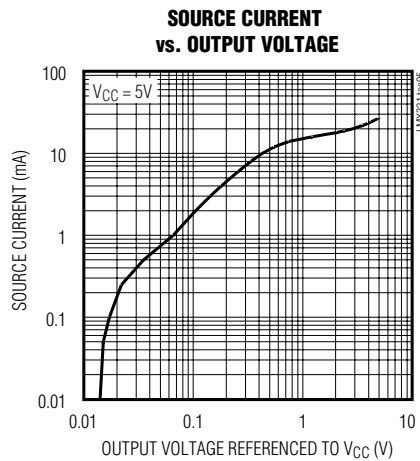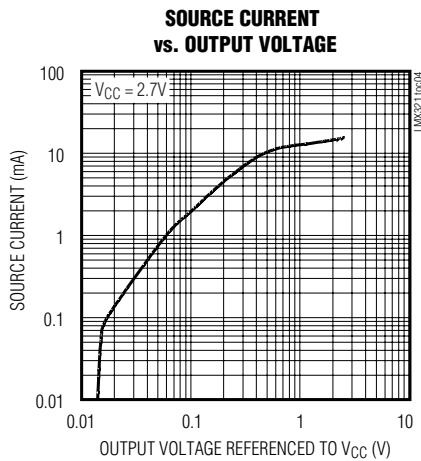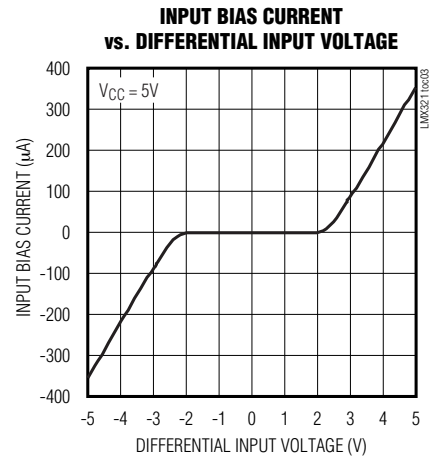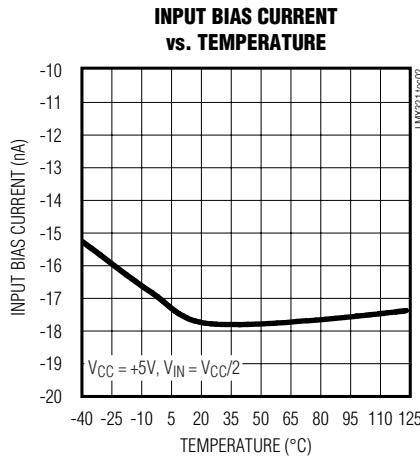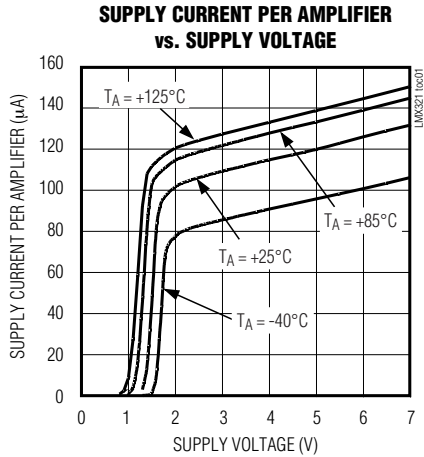

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Typical Operating Characteristics (continued)

($T_A = +25^\circ\text{C}$, $V_{EE} = 0\text{V}$, unless otherwise noted.)

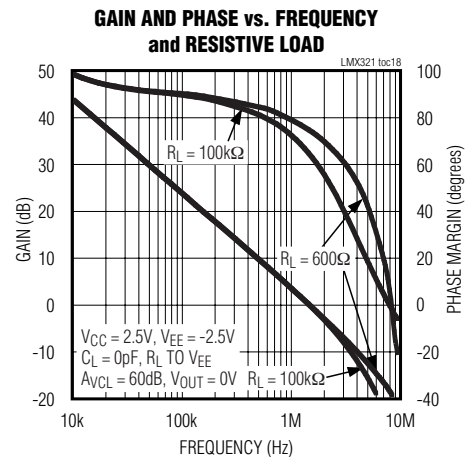
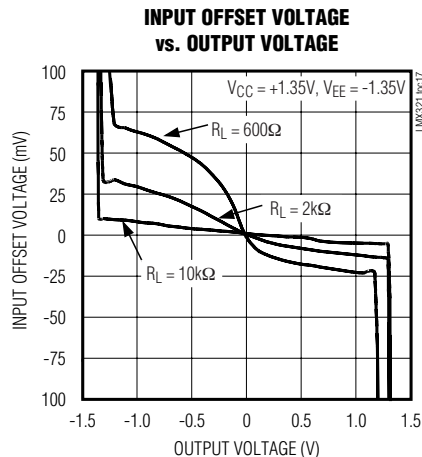
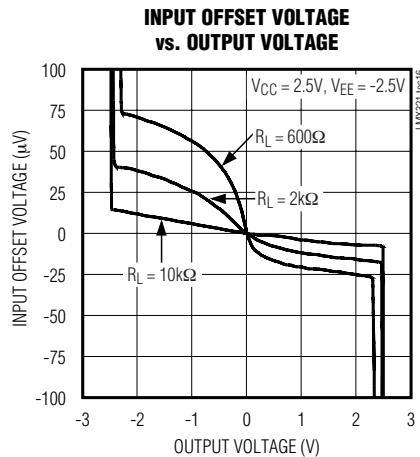
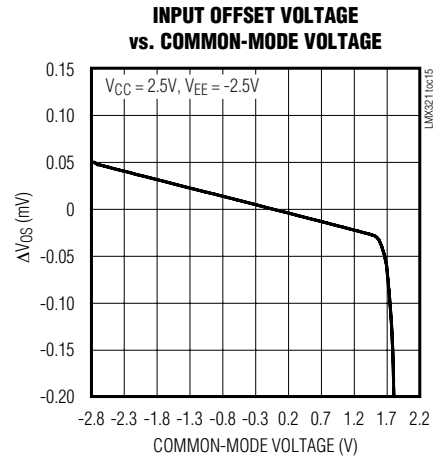
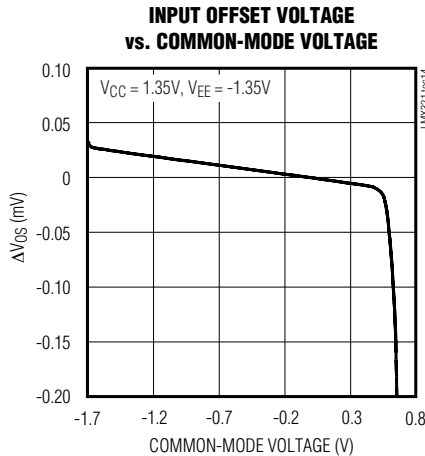
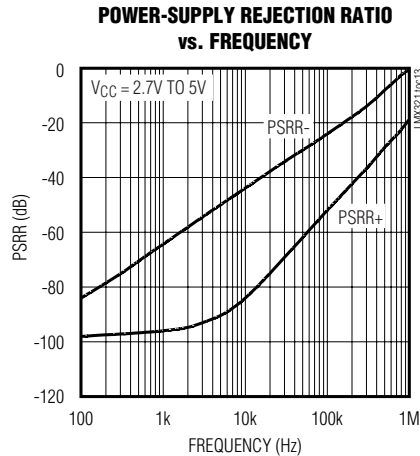
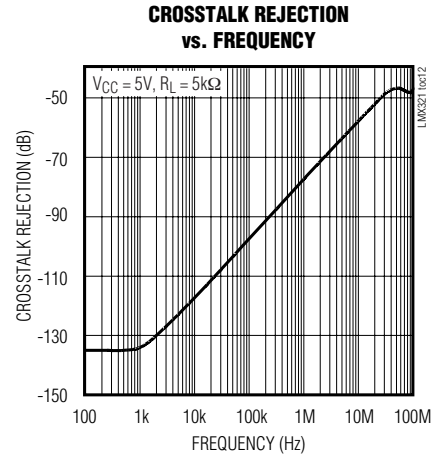
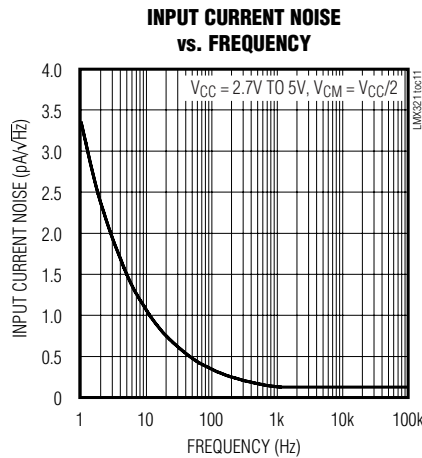
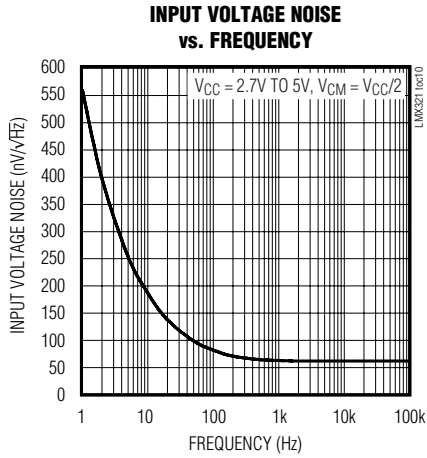


Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Typical Operating Characteristics (continued)

($T_A = +25^\circ\text{C}$, $V_{EE} = 0\text{V}$, unless otherwise noted.)




LMX321/LMX358/LMX324

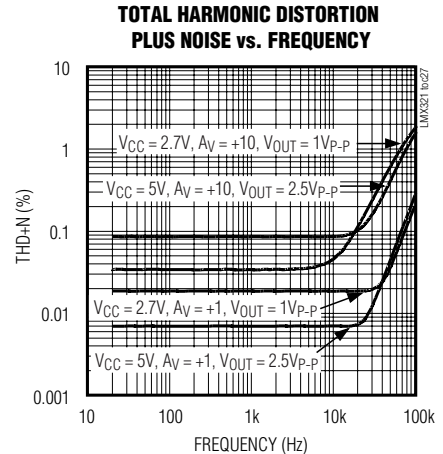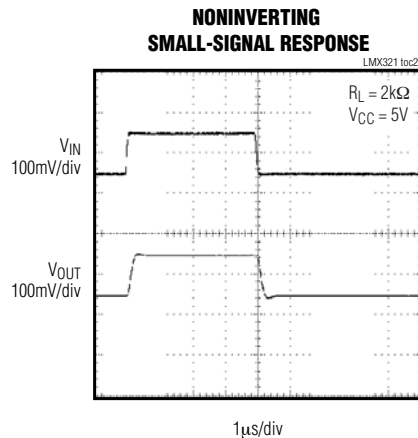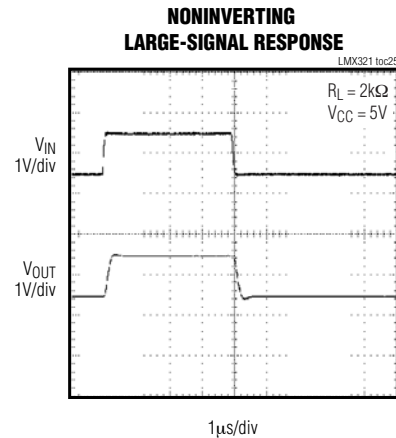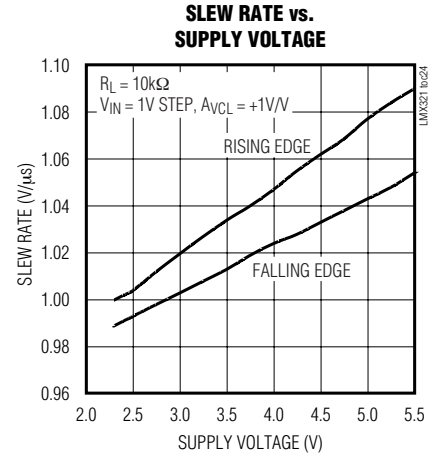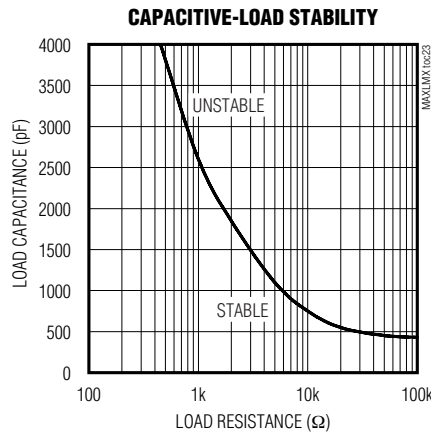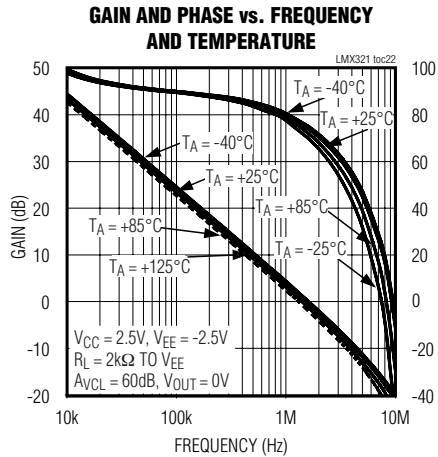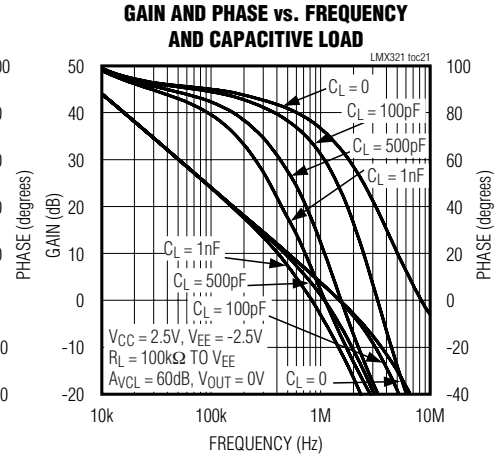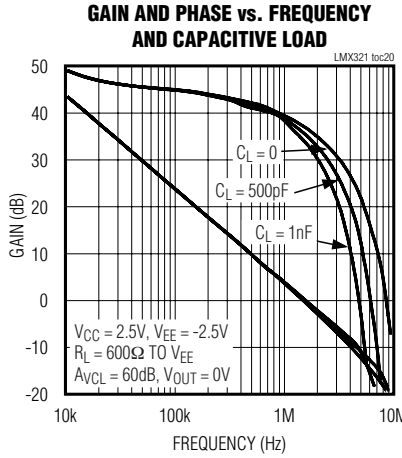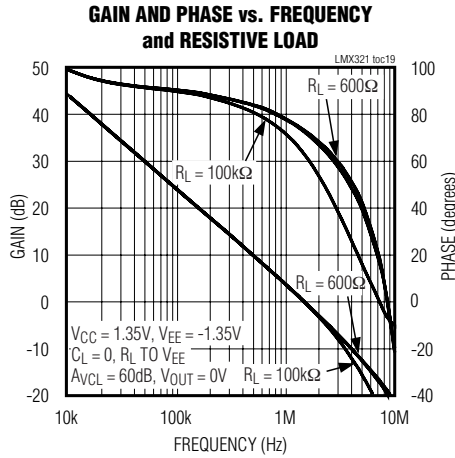

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Typical Operating Characteristics (continued)

($T_A = +25^\circ\text{C}$, $V_{EE} = 0\text{V}$, unless otherwise noted.)

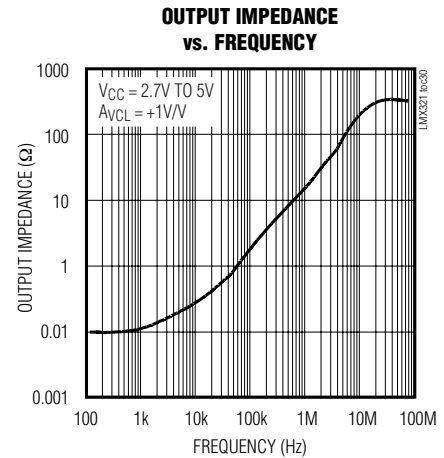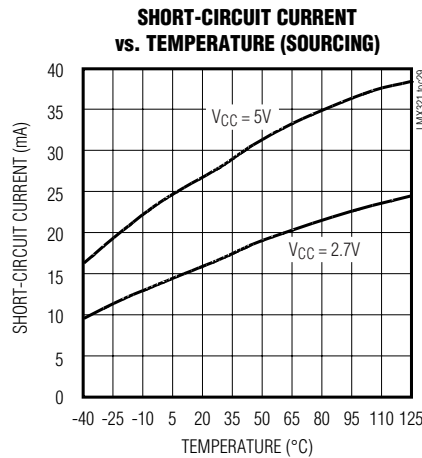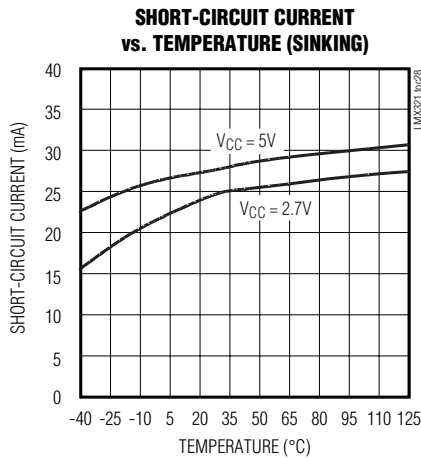

Pin Description

| PIN | | | NAME | FUNCTION |
|--------|--------|--------|------|---|
| LMX321 | LMX358 | LMX324 | | |
| 1 | — | — | IN+ | Noninverting Amplifier Input |
| 2 | 4 | 11 | VEE | Negative Supply. Connect to ground for single-supply operation. |
| 3 | — | — | IN- | Inverting Amplifier Input |
| 4 | — | — | OUT | Output |
| 5 | 8 | 4 | VCC | Positive Supply |
| — | 1 | 1 | OUT1 | Output for Amplifier 1 |
| — | 2 | 2 | IN1- | Inverting Input for Amplifier 1 |
| — | 3 | 3 | IN1+ | Noninverting Input for Amplifier 1 |
| — | 7 | 7 | OUT2 | Output for Amplifier 2 |
| — | 6 | 6 | IN2- | Inverting Input for Amplifier 2 |
| — | 5 | 5 | IN2+ | Noninverting Input for Amplifier 2 |
| — | — | 8 | OUT3 | Output for Amplifier 3 |
| — | — | 9 | IN3- | Inverting Input for Amplifier 3 |
| — | — | 10 | IN3+ | Noninverting Input for Amplifier 3 |
| — | — | 14 | OUT4 | Output for Amplifier 4 |
| — | — | 13 | IN4- | Inverting Input for Amplifier 4 |
| — | — | 12 | IN4+ | Noninverting Input for Amplifier 4 |

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

LMX321/LMX358/LMX324

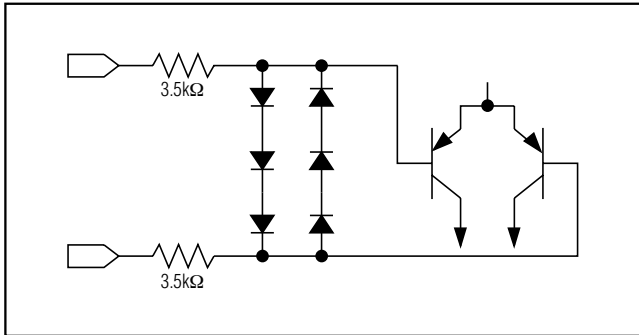


Figure 1. Input Protection Circuit

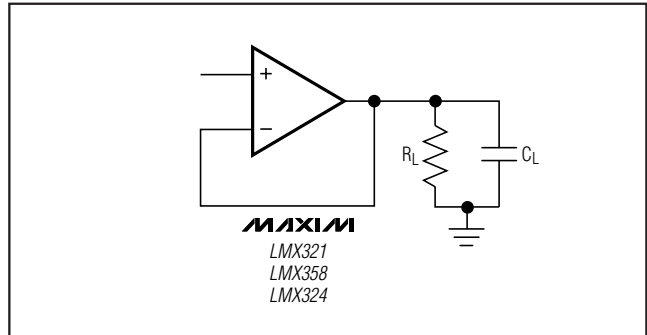


Figure 3. Capacitive-Load-Driving Circuit

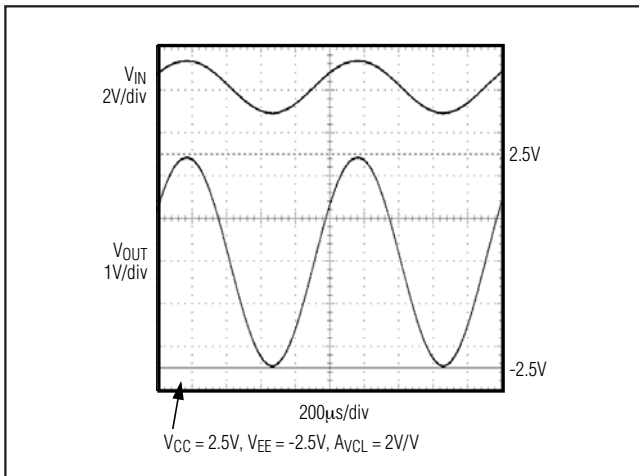


Figure 2. Rail-to-Rail Output Swing

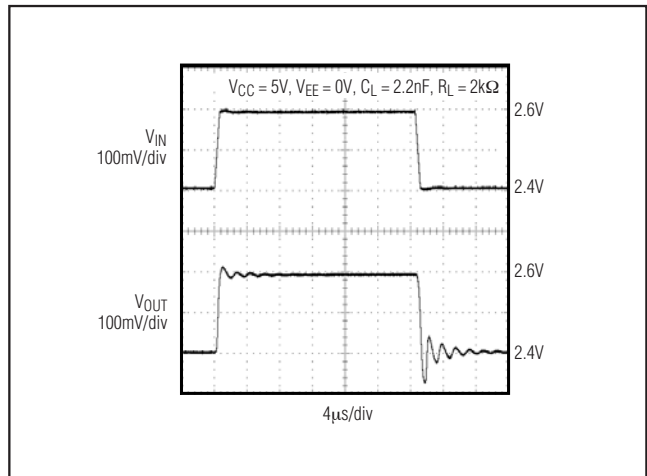


Figure 4. Output With Excessive Capacitive Load

Detailed Description

Input Protection Circuit

The LMX321/LMX358/LMX324's inputs are protected from large differential input voltages by internal 3.5kΩ series resistors and back-to-back triple diode stacks across the inputs (Figure 1). For differential input voltages (much less than 1.8V), input resistance is typically 3MΩ. For differential input voltages greater than 1.8V, input resistance is around 7kΩ, and the input bias current can be approximated by the following equation:

$$I_{BIAS} = (V_{DIFF} - 1.8V) / 7k\Omega$$

In the region where the differential input voltage approaches 1.8V, input resistance decreases exponentially from 3MΩ to 7kΩ as the diode block begins conducting. Inversely, the bias current increases with the same curve.

Rail-to-Rail Output Stage

The LMX321/LMX358/LMX324 drive 2kΩ loads and still typically swing within 40mV of the supply rails. Figure 2 shows the output voltage swing of the LMX321 configured with $A_{VCL} = +2V/V$.

Driving Capacitive Loads

Driving a capacitive load can cause instability in many op amps, especially those with low quiescent current. The LMX321/LMX358/LMX324 are unity-gain stable for a range of capacitive loads to above 400pF. Figure 4 shows the response of the LMX321 with an excessive capacitive load. Adding a series resistor between the output and the load capacitor (Figure 5) improves the circuit's response by isolating the load capacitance from the op amp's output.

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

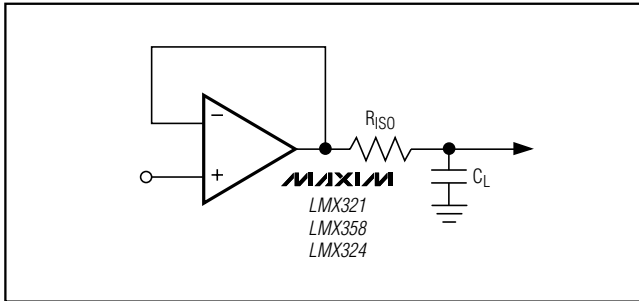


Figure 5. Capacitive-Load-Driving Circuit With Isolation Resistor

Applications Information

Power-Up

The LMX321/LMX358/LMX324 outputs typically settle within 10µs after power-up. Figure 6 shows the output voltage on power-up and power-down.

Power Supplies and Layout

The LMX321/LMX358/LMX324 operate from a single +2.3V to +7V power supply. Bypass the power supply with a 0.1µF capacitor to ground as close to VCC as possible.

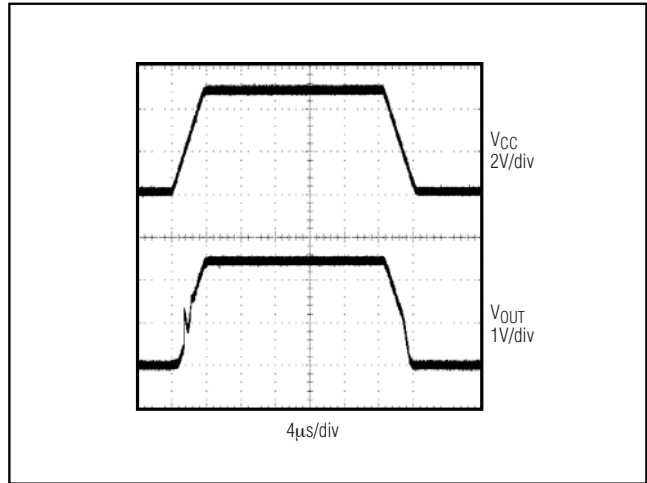


Figure 6. Power-Up/Power-Down Waveform

Good layout techniques optimize performance by minimizing the amount of stray capacitance at the op amp's inputs and outputs. Place external components close to the op amp to minimize trace lengths and stray capacitance.

Selector Guide

| PART | AMPLIFIERS PER PACKAGE | TOP MARK |
|-------------|------------------------|----------|
| LMX321AXK-T | 1 | ACP |
| LMX321AUK-T | 1 | ADSQ |
| LMX358AKA-T | 2 | AAIR |
| LMX358ASA | 2 | — |
| LMX358AUA-T | 2 | — |
| LMX324ASD | 4 | — |
| LMX324AUD | 4 | — |

Chip Information


LMX321 TRANSISTOR COUNT: 88
 LMX358 TRANSISTOR COUNT: 175
 LMX324 TRANSISTOR COUNT: 349
 PROCESS: Bipolar

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

LMX321/LMX358/LMX324

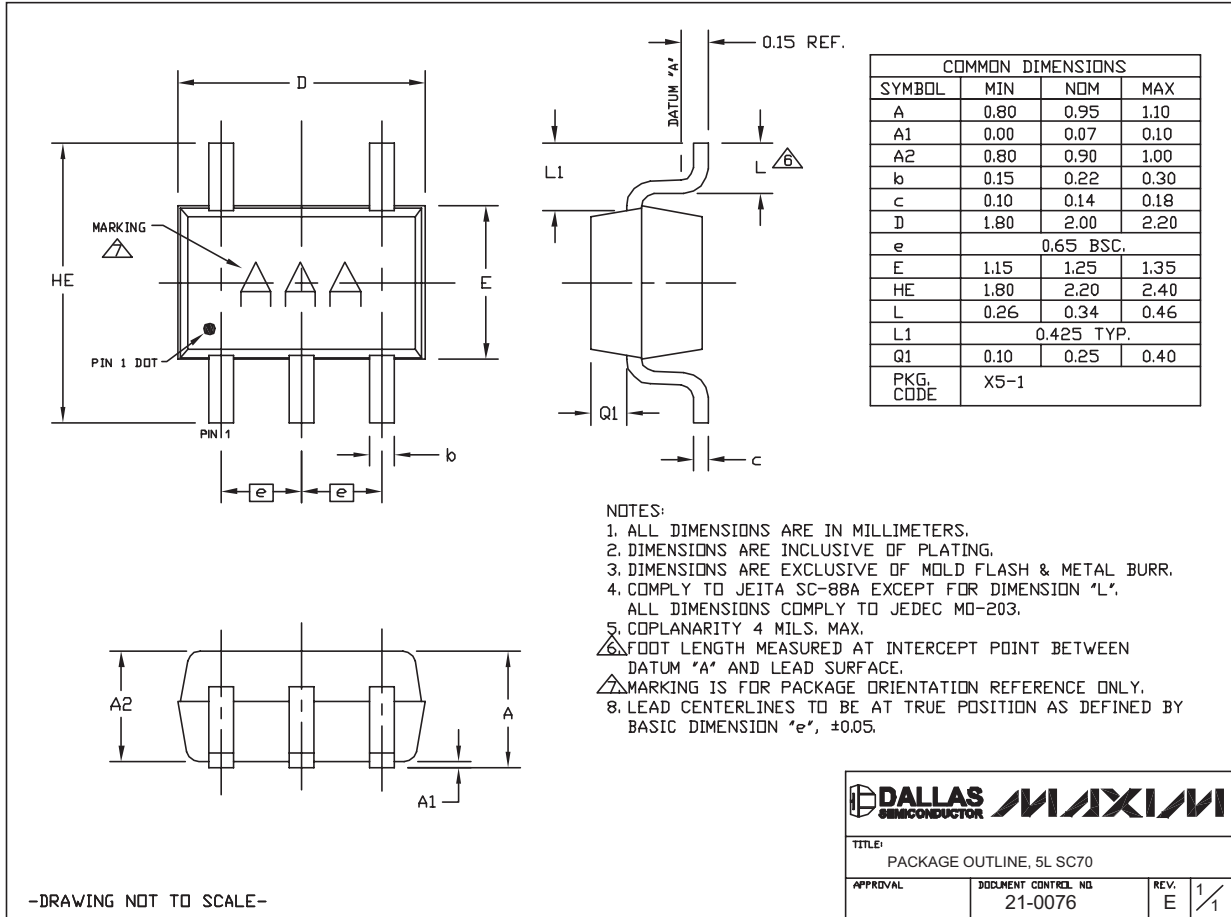

SC70, 5LEPS

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

| SYMBOL | MIN | NOM | MAX |
|-----------------------|-----------|-------|------|
| A | 0.90 | 1.25 | 1.45 |
| A1 | 0.00 | 0.05 | 0.15 |
| A2 | 0.90 | 1.10 | 1.30 |
| b | 0.35 | 0.40 | 0.50 |
| C | 0.08 | 0.15 | 0.20 |
| D | 2.80 | 2.90 | 3.00 |
| E | 2.60 | 2.80 | 3.00 |
| E1 | 1.50 | 1.625 | 1.75 |
| L | 0.35 | 0.45 | 0.60 |
| L1 | 0.60 REF | | |
| e | 0.95 BSC. | | |
| e1 | 1.90 BSC. | | |
| a | 0° | 2.5° | 8° |
| PKG CODES: U5-1, U5-2 | | | |

NOTES:
 1. ALL DIMENSIONS ARE IN MILLIMETERS.
 2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
 3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
 4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
 5. MEETS JEDEC MO178, VARIATION AA.
 6. LEADS TO BE COPLANAR WITHIN 0.10 mm.
 7. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.

| | | | |
|---|---------------------------------|-----------|-----|
| | | | |
| PROPRIETARY INFORMATION TITLE: PACKAGE OUTLINE, SOT-23, 5L | | | |
| APPROVAL | DOCUMENT CONTROL NO. 21-0057 | REV. F | 1/1 |

SOT-23 5L, EPS

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

LMX321/LMX358/LMX324

PIN 1 I.D. DOT (SEE NOTE 6)

| SYMBOL | MIN | NOM | MAX |
|--------|-----------|-------|------|
| A | 0.90 | 1.25 | 1.45 |
| A1 | 0.00 | 0.06 | 0.15 |
| A2 | 0.90 | 1.10 | 1.30 |
| b | 0.22 | 0.30 | 0.38 |
| C | 0.08 | 0.15 | 0.22 |
| D | 2.80 | 2.90 | 3.00 |
| E | 2.60 | 2.80 | 3.00 |
| E1 | 1.50 | 1.625 | 1.75 |
| L | 0.30 | 0.45 | 0.60 |
| L2 | 0.25 BSC. | | |
| e | 0.65 BSC. | | |
| e1 | 1.95 REF. | | |
| θ | 0° | 3° | 8° |

PKG CODES: K8-1, K8-2, K8S-3, K8F-4, K8FH-4, K8-5, K8C-6

DETAIL "A"

NOTE:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- FOOT LENGTH MEASURED FROM LEAD TIP TO UPPER RADIUS OF HEEL OF THE LEAD PARALLEL TO SEATING PLANE C.
- PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.
- PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
- COPLANARITY 4 MILS. MAX.
- PIN 1 I.D. DOT IS 0.3 MM Ø MIN. LOCATED ABOVE PIN 1.
- SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.
- MEETS JEDEC MO178 VARIATION BA.

—DRAWING NOT TO SCALE—

DALLAS SEMICONDUCTOR **MAXIM**

TITLE:
PACKAGE OUTLINE, SOT-23, 8L BODY

| | | |
|----------|---------------------------------|---------------|
| APPROVAL | DOCUMENT CONTROL NO. 21-0078 | REV. F 1/1 |
|----------|---------------------------------|---------------|

SOT23, 8L-EP5

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

8LUMAXDEFS

| DIM | INCHES | | MILLIMETERS | |
|-----|------------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | - | 0.043 | - | 1.10 |
| A1 | 0.002 | 0.006 | 0.05 | 0.15 |
| A2 | 0.030 | 0.037 | 0.75 | 0.95 |
| b | 0.010 | 0.014 | 0.25 | 0.36 |
| c | 0.005 | 0.007 | 0.13 | 0.18 |
| D | 0.116 | 0.120 | 2.95 | 3.05 |
| e | 0.0256 BSC | | 0.65 BSC | |
| E | 0.116 | 0.120 | 2.95 | 3.05 |
| H | 0.188 | 0.198 | 4.78 | 5.03 |
| L | 0.016 | 0.026 | 0.41 | 0.66 |
| α | 0° | 6° | 0° | 6° |
| S | 0.0207 BSC | | 0.5250 BSC | |

NOTES:

- D&E DO NOT INCLUDE MOLD FLASH.
- MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15MM (.006").
- CONTROLLING DIMENSION: MILLIMETERS.
- MEETS JEDEC MO-187C-AA.

| | | | |
|-------------------------------|----------------------|--------------|-----|
| DALLAS SEMICONDUCTOR | | MAXIM | |
| PROPRIETARY INFORMATION | | | |
| TITLE: | | | |
| PACKAGE OUTLINE, 8L uMAX/uSOP | | | |
| APPROVAL | DOCUMENT CONTROL NO. | REV. | 1/1 |
| | 21-0036 | J | |

Single/Dual/Quad, General-Purpose, Low-Voltage, Rail-to-Rail Output Op Amps

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to www.maxim-ic.com/packages.)

LMX321/LMX358/LMX324

COMMON DIMENSIONS

| | MILLIMETERS | | INCHES | |
|----------------|----------------|------|----------------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | — | 1.10 | — | .043 |
| A ₁ | 0.05 | 0.15 | .002 | .006 |
| A ₂ | 0.85 | 0.95 | .033 | .037 |
| b | 0.19 | 0.30 | .007 | .012 |
| b ₁ | 0.19 | 0.25 | .007 | .010 |
| c | 0.09 | 0.20 | .004 | .008 |
| c ₁ | 0.09 | 0.14 | .004 | .006 |
| D | SEE VARIATIONS | | SEE VARIATIONS | |
| E | 4.30 | 4.50 | .169 | .177 |
| e | 0.65 BSC | | .026 BSC | |
| H | 6.25 | 6.55 | .246 | .258 |
| L | 0.50 | 0.70 | .020 | .028 |
| N | SEE VARIATIONS | | SEE VARIATIONS | |
| α | 0° | 8° | 0° | 8° |
| klkl | 0.10 MAX | | | |

| JEDEC MO-153 | N | PKG. CODES | VARIATIONS | | | |
|-----------------|----|---------------------------|-------------|------|--------|------|
| | | | MILLIMETERS | | INCHES | |
| | | | MIN. | MAX. | MIN. | MAX. |
| AB-1 | 14 | U14-1J U14-2 | 4.90 | 5.10 | .193 | .201 |
| AB | 16 | U16-1J U16-2 | 4.90 | 5.10 | .193 | .201 |
| AC | 20 | U20-2J U20-3 | 6.40 | 6.60 | .252 | .260 |
| AD | 24 | U24-1 | 7.70 | 7.90 | .303 | .311 |
| AE | 28 | U28-1J U28-2J U28-3 | 9.60 | 9.80 | .378 | .386 |

NOTES

- DIMENSIONS D AND E DO NOT INCLUDE FLASH
- MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm PER SIDE
- CONTROLLING DIMENSION: MILLIMETER
- MEETS JEDEC OUTLINE MO-153. SEE JEDEC VARIATIONS TABLE
- "N" REFERS TO NUMBER OF LEADS
- LEAD COPLANARITY 0.10 MM MAX.
- NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY
- MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY
- BENT LEAD 0.10 MM MAX.

-DRAWING NOT TO SCALE-

TSSOP4, 4.0mm, EPS

DALLAS SEMICONDUCTOR **MAXIM**

TITLE: PACKAGE OUTLINE, TSSOP 4.0mm BODY

| | | | |
|-----------|---------------------------------|-----------|-----|
| APPROVAL: | DOCUMENT CONTROL NO. 21-0066 | REV. I | 1/1 |
|-----------|---------------------------------|-----------|-----|

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 15

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LMX324AUD](#) on WIN SOURCE

 [Maxim Integrated](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management