




**THE DATASHEET OF  
0433.375NR**



## 433 Series Fuse

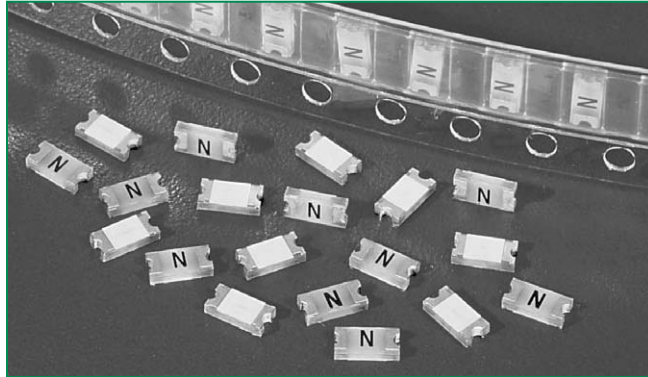

### Description



The 433 series fast-acting surface mount fuse series is a small (1206 size) thin-film device designed for secondary protection of circuits used in space constrained applications such as hand-held portable electronic devices.

For RoHS compliant and lead-free design, please refer to the Littelfuse 466 series thin film fuse. For new designs of 7 amp please refer to Littelfuse 429 series thin film fuse.

### Features

- The SlimLine 1206 fuse is an extremely small, low profile design (1206 chip size) utilizing thin-film technology to achieve precise control of electrical characteristics.
- The lower height profile produces a flat surface for improved performance in pick-and-place operations and an alternate solution for height critical application.
- Mounting pad and electrical specification are identical to the popular 429 Series specifications.

### Agency Approvals

| Agency  | Agency File Number | Ampere Range |
|---|--------------------|--------------|
|  | E10480             | 125mA - 5A   |
|  | LR29862            | 125mA - 5A   |

### Electrical Characteristics for Series



| % of Ampere Rating | Opening Time at 25°C |
|--------------------|----------------------|
| 100%               | 4 hours, Minimum     |
| 200%               | 5 sec., Maximum      |
| 300%               | 0.2 sec., Maximum    |

### Applications

Secondary protection for space constrained applications such as:

- Cell phones
- Battery packs
- Digital cameras
- DVD players
- Hard disk drives.

### Electrical Specifications by Item

| Ampere Rating (A) | Amp Code | Max Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) | Agency Approvals  |   |
|-------------------|----------|------------------------|---------------------|--------------------------------|---|---|---|
|                   |          |                        |                     |                                |   |  |  |
| 0.125             | .125     | 125                    | 50A @125 V AC/DC    | 3.45000                        | 0.00040   | x   | x   |
| 0.200             | .200     | 125                    |                     | 0.93800                        | 0.00055   | x   | x   |
| 0.250             | .250     | 125                    |                     | 0.62500                        | 0.00100   | x   | x   |
| 0.375             | .375     | 125                    |                     | 0.37500                        | 0.00280   | x   | x   |
| 0.50              | .500     | 63                     | 50A @63 V AC/DC     | 0.24050                        | 0.00600   | x   | x   |
| 0.60              | .600     | 63                     |                     | 0.21000                        | 0.01310   | x   | x   |
| 0.75              | .750     | 63                     |                     | 0.13700                        | 0.01700   | x   | x   |
| 0.80              | .800     | 63                     |                     | 0.12250                        | 0.03050   | x   | x   |
| 1.00              | .001     | 63                     |                     | 0.09950                        | 0.03500   | x   | x   |
| 1.25              | 1.25     | 63                     |                     | 0.07475                        | 0.06500   | x   | x   |
| 1.50              | 01.5     | 63                     |                     | 0.06250                        | 0.12500   | x   | x   |
| 1.75              | 1.75     | 63                     |                     | 0.05000                        | 0.15000   | x   | x   |
| 2.00              | 02.0     | 63                     |                     | 0.03975                        | 0.23000   | x   | x   |
| 2.50              | 02.5     | 32                     |                     | 50A @32 V AC/DC                | 0.03065   | 0.50000   | x   |
| 3.00              | 03.0     | 32                     | 0.02625             |                                | 0.70000   | x   | x   |
| 4.00              | 04.0     | 24                     | 50A @24 V AC/DC     | 0.01400                        | 1.0240  | x   | x   |
| 5.00              | 05.0     | 24                     |                     | 0.01100                        | 1.6000  | x   | x   |

1. Measured at 10% of rated current, 25°C.

2. Measured at rated voltage.

### Temperature Derating Curve



### Average Time Current Curves



### Soldering Parameters - Wave Soldering

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (Min to Max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 5°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max          |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Temperature ( $t_l$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 250 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate   |                                    | 5°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 260°C                   |




## Product Characteristics

|                              |  |
|------------------------------|--|
| <b>Materials</b>             | <b>Body:</b> Epoxy Substrate<br><b>Terminations:</b> 95% Tin / 5% Lead over Nickel over Copper<br><b>Element Cover Coat:</b> Conformal Coating |
| <b>Operating Temperature</b> | - 55°C to 90°C. Consult temperature derating curve chart.  |
| <b>Thermal Shock</b>         | Withstands 5 cycles of - 55°C to 125°C   |

|  |  |
|--|--|
| <b>Humidity</b>                              | MIL-STD-202F Method 103B Condition D                       |
| <b>Vibration</b>                             | Per MIL-STD-202F, Method 201A                              |
| <b>Insulation Resistance (After Opening)</b> | Greater than 10,000 ohms.                                  |
| <b>Resistance to Soldering Heat</b>          | Withstands 60 seconds above 200°C and up to 260°C, maximum |

## Dimensions

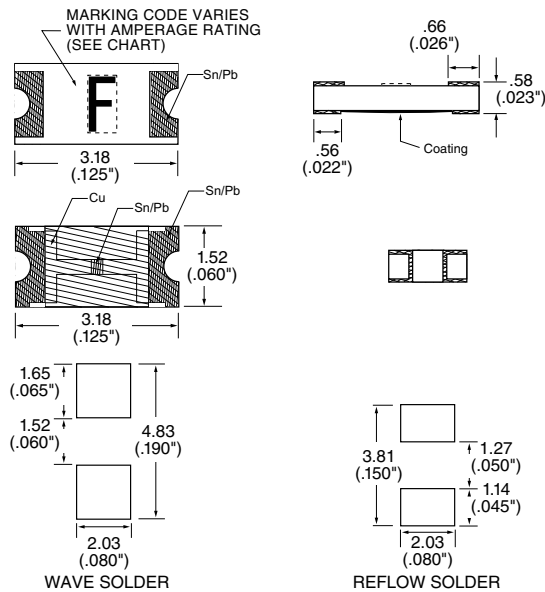

## Part Marking System

| Amp Code | Marking Code |
|----------|--------------|
| .125     | <b>B</b>     |
| .200     | <b>C</b>     |
| .250     | <b>D</b>     |
| .375     | <b>E</b>     |
| .500     | <b>F</b>     |
| .600     | <b>.6</b>    |
| .750     | <b>G</b>     |
| .800     | <b>.8</b>    |
| 001.     | <b>H</b>     |
| 1.25     | <b>J</b>     |
| 01.5     | <b>K</b>     |
| 1.75     | <b>L</b>     |
| 002.     | <b>N</b>     |
| 02.5     | <b>O</b>     |
| 003.     | <b>P</b>     |
| 03.5     | <b>R</b>     |
| 004.     | <b>S</b>     |
| 005.     | <b>T</b>     |

## Part Numbering System



## Packaging

| Packaging Option       | Packaging Specification        | Quantity | Quantity & Packaging Code |
|------------------------|--------------------------------|----------|---------------------------|
| Tape & Reel - 8mm tape | EIA RS-481-1 (IEC 286, part 3) | 5000     | NR                        |

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 0433.375NR on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management