



**THE DATASHEET OF  
04-ESNF250-10**




# No-Fray Expandable Braided Polyester Sleeving

## Features

- Material may be Cut with a Scissors Without Obvious Fray
- Flame Retardant – Flammability Rating VW-1
- Easy to Install, Lightweight and Flexible
- Allows Flexibility while Providing Secure Bundling
- Bundles Cables and Organizes Wires for a Professional Look
- 10 foot (3.048 meter), 50 foot (15.24 meter) and 100 foot (30.48 meter) Spools
- Material: Flame Retardant Polyethylene Terephthalate (PET)
- Working Temperature Range: -50° to +150°C (-58° to +302°F)
- Melting Point: +240°C ±10° (+464°F ±10°)

ES-01

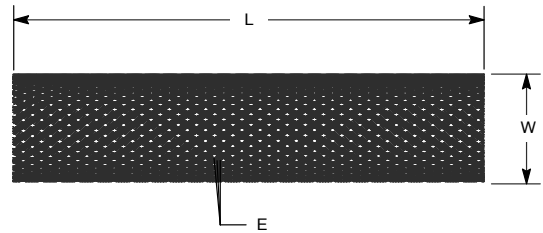


## No-Fray Expandable Braided Polyester Sleeving

NTE Type No.			Size (inch)	Expandable Range, I to O (in. / mm)	Diag No.
10 Foot	50 Foot Spool	100 Foot Spool			
04-ESNF125-10	04-ESNF-125L	04-ESNF-125C	1/8"	.039 (1.0) - .197 (5.0)	ES-01
04-ESNF250-10	04-ESNF-250L	04-ESNF-250C	1/4"	.118 (3.0) - .315 (8.0)	ES-01
04-ESNF375-10	04-ESNF-375L	04-ESNF-375C	3/8"	.275 (7.0) - .472 (12.0)	ES-01
04-ESNF500-10	04-ESNF-500L	04-ESNF-500C	1/2"	.315 (8.0) - .551 (14.0)	ES-01
04-ESNF750-10	04-ESNF-750L	04-ESNF-750C	3/4"	.551 (14.0) - .905 (23.0)	ES-01
04-ESNF1000-10	04-ESNF-1000L	04-ESNF-1000C	1"	.707 (18.0) - 1.102 (28.0)	ES-01

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 04-ESNF250-10 on WIN SOURCE](#)

 [NTE Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management