










**THE DATASHEET OF
RS-032G05A3-SM RT**



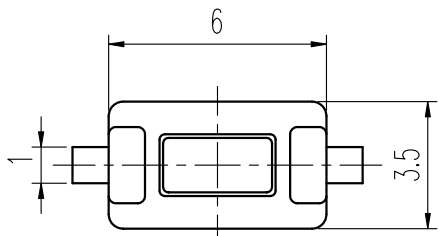

	H	K0	T	X	①
A	4.3	5.3	0.4	1500	
B	5	6.6	0.5	1250	

FORCE (gf)		KNOB COLOR
1	180 ± 50	NATURAL(NK)
3	250 ± 50	BLACK(BK)
② 4	230 ± 30	NATURAL(NK)

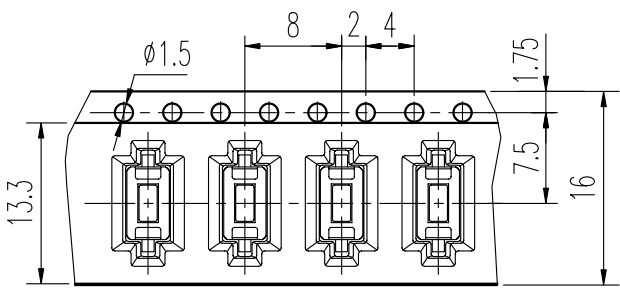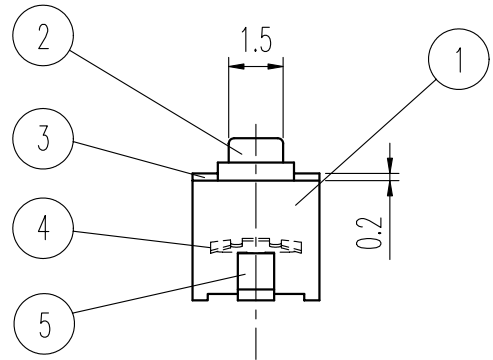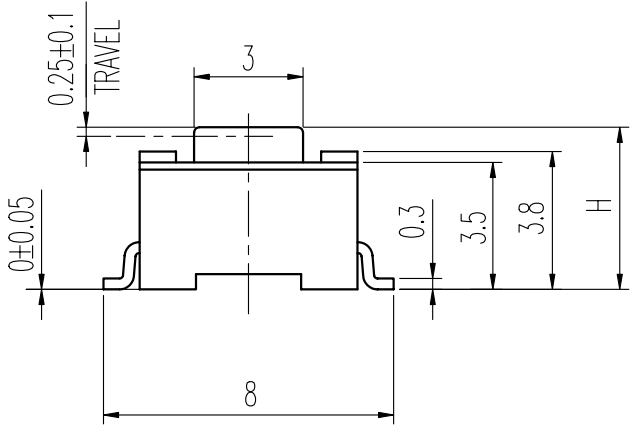

TOTAL X PCS PER REEL. ①





示意图 SCHEMATIC

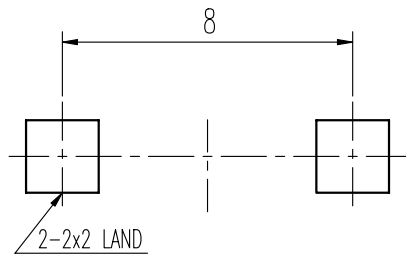

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC 12_V 50 mA
初期接触电阻 Initial Contact Resistance	100 mΩ Max.
绝缘电阻 Insulation Resistance	DC100 V 60_Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 250_V(50~60HZ) 60_Sec.

操作力见上表	
负荷寿命 Operating Life With Load	30,000 次 Cycles



5	端子 TERMINAL	C2680R	2	Ag PLATED			
4	弹片 SPRING PLATE	SUS	1	Ag CLAD	A03	增加操作力规格, 见标示 ②	彭云军 2008.1.24
3	盖片 COVER	SUS	1	NATURAL	A02	TOTAL 1250PCS PER REEL. 变更为TOTAL X PCS PER REEL.; 6.6变更为K0; 0.5变更为T; 增加K0值尺寸, T值尺寸, X值数量, 见标注 ①	鲁腾 2007-05-15
2	胶柄 KNOB	PA	1	见上表	A01		刘红梅 2006-10-27
1	胶壳 HOUSING	PA	1	BLACK C	标号 REV	内容 DESCRIPTION	签名 SIGN. 日期 DATE
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS	DWG NO. ITEM2773		

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	TACT SWITCH		ITEM NO	RS-032G05__-SM RT	
UNDER 1	± 0.10	DRAWN	彭云军	2008.1.24	VERSION	A03	PAGE 1 OF 1
1 - 10	± 0.30	REVIEWED	张念明	2008.1.25	SCALE		UNIT mm
OVER 10	± 0.50	APPROVED	程先金	2008.1.25	PROJECTION		

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View RS-032G05A3-SM RT on WIN SOURCE](#)
-  [C&K Components Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management