



# Power Splitter/Combiner

## SCP-4-1W+

4 Way-0° 50Ω

10 to 650 MHz

### Maximum Ratings



Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.25W max.

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

SUM PORT	3
PORT 1	2
PORT 2	4
PORT 3	6
PORT 4	8
GROUND	1,5,7


### Outline Drawing



### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	M	N	P	wt
.75	.38	.20	.010	.050	.020	.200	19.05	9.65	5.08	0.25	1.27	0.51	5.08
.075	.600	.450	.470	.100	.150	grams	1.91	15.24	11.43	11.94	2.54	3.81	1.6

### Demo Board MCL P/N: TB-36 Suggested PCB Layout (PL-073)

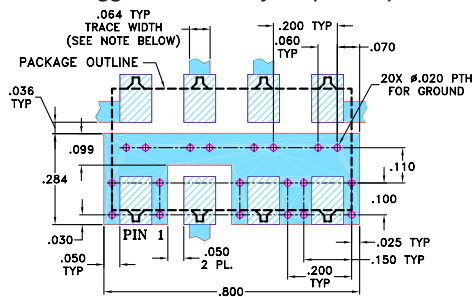

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wideband, 10 to 650 MHz
- excellent amplitude unbalance, 0.4 dB typ.

### Applications

- VHF/UHF
- receivers/transmitters
- federal and defense communication



Generic photo used for illustration purposes only

CASE STYLE: YY101

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 6 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
$f_L$ - $f_U$	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.						
10-650	34	28	23	18	21	15	0.7	1.0	0.9	1.5	1.1	1.9	3	7	12	0.2	0.4	0.7

L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]

### Typical Performance Data

Freq. (MHz)	Total Loss <sup>1</sup> (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
10.00	6.38	6.36	6.36	6.36	0.02	37.18	42.07	38.05	0.07	1.07	1.13	1.13	1.12	1.12
30.00	6.41	6.39	6.39	6.38	0.02	36.10	42.30	36.46	0.12	1.06	1.12	1.12	1.12	1.12
90.00	6.44	6.43	6.43	6.42	0.02	33.76	39.74	33.67	0.43	1.05	1.12	1.12	1.12	1.12
120.00	6.47	6.46	6.46	6.44	0.03	32.46	38.76	32.19	0.58	1.04	1.12	1.12	1.12	1.12
150.00	6.50	6.49	6.49	6.47	0.03	31.21	38.02	30.82	0.70	1.03	1.12	1.12	1.11	1.12
180.00	6.47	6.47	6.48	6.45	0.03	29.92	37.23	29.49	0.85	1.02	1.11	1.11	1.11	1.11
210.00	6.51	6.52	6.52	6.49	0.04	28.87	36.52	28.36	0.95	1.01	1.11	1.11	1.11	1.11
240.00	6.55	6.56	6.56	6.52	0.04	27.96	35.86	27.40	1.10	1.01	1.10	1.11	1.10	1.10
300.00	6.58	6.59	6.59	6.54	0.05	26.21	34.39	25.59	1.33	1.05	1.09	1.09	1.09	1.09
375.00	6.63	6.65	6.66	6.58	0.08	24.48	32.64	23.81	1.69	1.10	1.07	1.08	1.07	1.08
450.00	6.70	6.75	6.75	6.63	0.12	23.16	31.19	22.46	1.94	1.15	1.06	1.07	1.06	1.06
525.00	6.77	6.86	6.86	6.70	0.15	22.23	30.20	21.51	2.32	1.21	1.04	1.05	1.05	1.04
575.00	6.79	6.88	6.87	6.69	0.19	21.76	29.83	21.04	2.45	1.24	1.03	1.05	1.04	1.04
625.00	6.83	6.95	6.94	6.73	0.22	21.37	29.74	20.65	2.66	1.28	1.03	1.05	1.04	1.03
650.00	6.88	7.01	6.99	6.77	0.25	21.19	29.79	20.47	2.73	1.29	1.03	1.05	1.04	1.03

1. Total Loss = Insertion Loss + 6dB splitter loss.

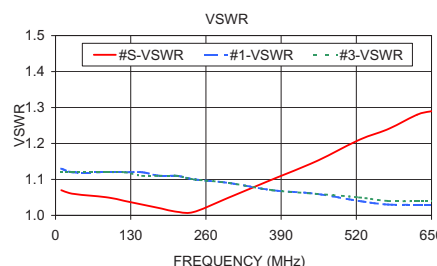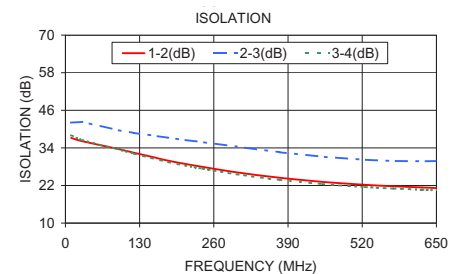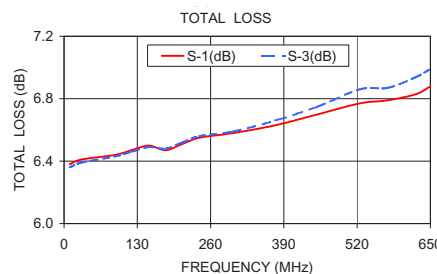

### Electrical Schematic



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SCP-4-1W+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management