



**THE DATASHEET OF  
VE-101M1CTR-0605S**



### Features

- 4  $\phi$  ~ 18  $\phi$ , 105°C, 2,000 ~ 5,000 hours assured
- Large capacitance with ultra low impedance capacitors
- Designed for surface mounting on high density PC board
- RoHS compliance
- AEC-Q200 qualified



Marking color: Black

### Specifications

| Items                                       | Performance  |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
|---|--|---------------|--|--------------------|------------------------------|--------|-----------------------------------|-----------------|------------------------|------|-----|------------|-----------------|-------------------|------|------|------|------|------|------|------|---|---|-------------------|---|---|---|---|---|---|---|---|---|
| Category Temperature Range                  | -55°C ~ +105°C   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Capacitance Tolerance                       | ±20% (at 120 Hz, 20°C)   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Leakage Current (at 20°C)                   | I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes)<br>Where, C = rated capacitance in μF, V = rated DC working voltage in V   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tanδ (at 120 Hz, 20°C)                      | <table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>  | Rated Voltage | 6.3  | 10                 | 16                           | 25     | 35                                | 50              | 63                     | 80   | 100 | Tanδ (max) | 0.30            | 0.26              | 0.22 | 0.16 | 0.13 | 0.10 | 0.08 | 0.08 | 0.07 |   |   |                   |   |   |   |   |   |   |   |   |   |
| Rated Voltage                               | 6.3  | 10            | 16   | 25                 | 35                           | 50     | 63                                | 80              | 100                    |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tanδ (max)                                  | 0.30   | 0.26          | 0.22   | 0.16               | 0.13                         | 0.10   | 0.08                              | 0.08            | 0.07                   |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Low Temperature Characteristics (at 120 Hz) | <p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>  | Rated Voltage |  | 6.3                | 10                           | 16     | 25                                | 35              | 50                     | 63   | 80  | 100        | Impedance Ratio | Z(-25°C)/Z(+20°C) | 4    | 3    | 2    | 2    | 2    | 2    | 2    | 2 | 2 | Z(-55°C)/Z(+20°C) | 8 | 5 | 4 | 3 | 3 | 3 | 3 | 3 | 3 |
| Rated Voltage                               |  | 6.3           | 10   | 16                 | 25                           | 35     | 50                                | 63              | 80                     | 100  |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Impedance Ratio                             | Z(-25°C)/Z(+20°C)  | 4             | 3  | 2                  | 2                            | 2      | 2                                 | 2               | 2                      | 2    |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
|   | Z(-55°C)/Z(+20°C)  | 8             | 5  | 4                  | 3                            | 3      | 3                                 | 3               | 3                      | 3    |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Endurance                                   | <table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs for <math>\phi D \leq 6.3\text{mm}</math> &amp; <math>8 \times 6.5\text{L}</math> &amp; <math>10 \phi \times 7.7\text{L}</math>;<br/>5,000 Hrs for <math>\phi D \geq 8\text{mm}</math></td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 ~ 5,000 hours at 105°C.</p> | Test Time     | 2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5\text{L}$ & $10 \phi \times 7.7\text{L}$ ;<br>5,000 Hrs for $\phi D \geq 8\text{mm}$ | Capacitance Change | Within ±30% of initial value | Tanδ   | Less than 300% of specified value | Leakage Current | Within specified value |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Test Time                                   | 2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5\text{L}$ & $10 \phi \times 7.7\text{L}$ ;<br>5,000 Hrs for $\phi D \geq 8\text{mm}$   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Capacitance Change                          | Within ±30% of initial value   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tanδ  | Less than 300% of specified value  |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Leakage Current                             | Within specified value   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Shelf Life Test                             | <table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>  | Test Time     | 1,000 Hrs  | Capacitance Change | Within ±30% of initial value | Tanδ   | Less than 300% of specified value | Leakage Current | Within specified value |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Test Time                                   | 1,000 Hrs  |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Capacitance Change                          | Within ±30% of initial value   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tanδ  | Less than 300% of specified value  |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Leakage Current                             | Within specified value   |               |  |                    |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Ripple Current and Frequency Multipliers    | <table border="1"> <tr> <td>Frequency(Hz)</td> <td>50, 60</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multiplier</td> <td>0.60</td> <td>0.70</td> <td>0.85</td> <td>1.0</td> </tr> </table>   | Frequency(Hz) | 50, 60   | 120                | 1k                           | 10k up | Multiplier                        | 0.60            | 0.70                   | 0.85 | 1.0 |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Frequency(Hz)                               | 50, 60   | 120           | 1k   | 10k up             |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Multiplier                                  | 0.60   | 0.70          | 0.85   | 1.0                |                              |        |                                   |                 |                        |      |     |            |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |

### Diagram of Dimensions

Fig. 1


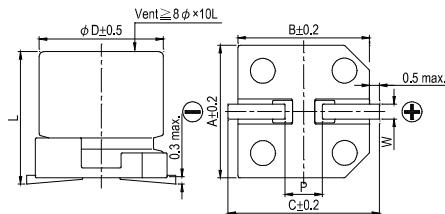


Fig. 2

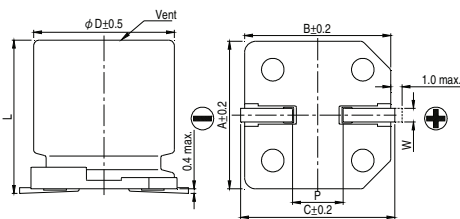

### Lead Spacing and Diameter


Unit: mm

| φ D  | L          | A    | B    | C    | W         | P ± 0.2 | Fig. No. |
|------|------------|------|------|------|-----------|---------|----------|
| 4    | 5.7 ± 0.3  | 4.3  | 4.3  | 5.1  | 0.5 ~ 0.8 | 1.0     | 1        |
| 5    | 5.7 ± 0.3  | 5.3  | 5.3  | 5.9  | 0.5 ~ 0.8 | 1.5     | 1        |
| 6.3  | 5.7 ± 0.3  | 6.6  | 6.6  | 7.2  | 0.5 ~ 0.8 | 2.0     | 1        |
| 6.3  | 7.7 ± 0.3  | 6.6  | 6.6  | 7.2  | 0.5 ~ 0.8 | 2.0     | 1        |
| 8    | 6.5 ± 0.3  | 8.3  | 8.3  | 9.0  | 0.5 ~ 0.8 | 2.3     | 1        |
| 8    | 10 ± 0.5   | 8.3  | 8.3  | 9.0  | 0.7 ~ 1.1 | 3.1     | 1        |
| 10   | 7.7 ± 0.3  | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7     | 1        |
| 10   | 10 ± 0.5   | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7     | 1        |
| 12.5 | 13.5 ± 0.5 | 13.0 | 13.0 | 13.7 | 1.1 ~ 1.4 | 4.4     | 2        |
| 12.5 | 16 ± 0.5   | 13.0 | 13.0 | 13.7 | 1.1 ~ 1.4 | 4.4     | 2        |
| 16   | 16.5 ± 0.5 | 17.0 | 17.0 | 18.0 | 1.1 ~ 1.4 | 6.4     | 2        |
| 16   | 21.5 ± 0.5 | 17.0 | 17.0 | 18.0 | 1.1 ~ 1.4 | 6.4     | 2        |
| 18   | 16.5 ± 0.5 | 19.0 | 19.0 | 20.0 | 1.1 ~ 1.4 | 6.4     | 2        |
| 18   | 21.5 ± 0.5 | 19.0 | 19.0 | 20.0 | 1.1 ~ 1.4 | 6.4     | 2        |


All product specifications in the catalog are subject to change without notice. (Cat. 2023E1)

### Marking


$\phi D \leq 6.3 \text{ mm}$

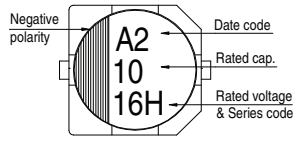

$\phi D = 8 \sim 10 \text{ mm}$

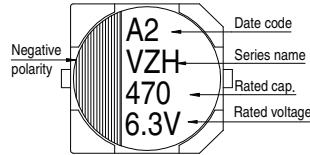

$\phi D \geq 12.5 \text{ mm}$

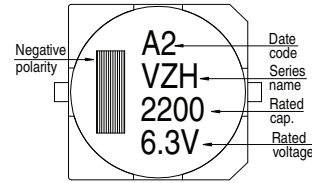

Dimension:  $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance:  $\Omega$  at 100k Hz, 20°C

### Dimension and Permissible Ripple Current

| Rated Volt. (V <sub>DC</sub> ) | Cap. (μF) | Contents  | 6.3V (0J)         |       |           | 10V (1A)          |       |         | 16V (1C)          |       |           | 25V (1E)          |         |         | 35V (1V)          |       |           | 50V (1H)          |         |           |       |       |    |
|--------------------------------|-----------|-----------|-------------------|-------|-----------|-------------------|-------|---------|-------------------|-------|-----------|-------------------|---------|---------|-------------------|-------|-----------|-------------------|---------|-----------|-------|-------|----|
|                                |           |           | $\phi D \times L$ | Imp.  | mA        | $\phi D \times L$ | Imp.  | mA      | $\phi D \times L$ | Imp.  | mA        | $\phi D \times L$ | Imp.    | mA      | $\phi D \times L$ | Imp.  | mA        | $\phi D \times L$ | Imp.    | mA        |       |       |    |
| 1                              | 010       |           |                   |       |           |                   |       |         |                   |       |           |                   |         |         |                   |       |           |                   | 4x5.7   | 2.9       | 60    |       |    |
| 2.2                            | 2R2       |           |                   |       |           |                   |       |         |                   |       |           |                   |         |         |                   |       |           |                   | 4x5.7   | 2.9       | 60    |       |    |
| 3.3                            | 3R3       |           |                   |       |           |                   |       |         |                   |       |           |                   |         |         |                   |       |           |                   | 4x5.7   | 2.9       | 60    |       |    |
| 4.7                            | 4R7       |           |                   |       |           |                   |       |         |                   |       |           |                   |         |         |                   |       |           | 4x5.7             | 1.35    | 80        | 5x5.7 | 1.52  | 85 |
| 10                             | 100       |           |                   |       |           |                   |       |         |                   | 4x5.7 | 1.35      | 80                | 4x5.7   | 1.35    | 80                | 5x5.7 | 0.80      | 150               | 6.3x5.7 | 0.88      | 165   |       |    |
| 22                             | 220       | 4x5.7     | 1.35              | 80    | 4x5.7     | 1.35              | 80    | 5x5.7   | 0.80              | 150   | 5x5.7     | 0.80              | 150     | 6.3x5.7 | 0.44              | 230   | 6.3x5.7   | 0.44              | 230     | 6.3x5.7   | 0.88  | 165   |    |
| 33                             | 330       | 4x5.7     | 1.35              | 80    | 5x5.7     | 0.80              | 150   | 6.3x5.7 | 0.44              | 230   | 6.3x5.7   | 0.44              | 230     | 6.3x5.7 | 0.44              | 230   | 6.3x5.7   | 0.44              | 230     | 6.3x7.7   | 0.68  | 185   |    |
| 47                             | 470       | 5x5.7     | 0.80              | 150   | 6.3x5.7   | 0.44              | 230   | 6.3x5.7 | 0.44              | 230   | 6.3x5.7   | 0.44              | 230     | 6.3x5.7 | 0.44              | 230   | 6.3x5.7   | 0.44              | 230     | 6.3x7.7   | 0.68  | 185   |    |
| 68                             | 680       |           |                   |       |           |                   |       |         |                   |       |           |                   | 6.3x5.7 | 0.44    | 230               | 8x6.5 | 0.36      | 280               | 8x10    | 0.34      | 369   |       |    |
| 100                            | 101       | 6.3x5.7   | 0.44              | 230   | 6.3x5.7   | 0.44              | 230   | 6.3x5.7 | 0.44              | 230   | 6.3x7.7   | 0.36              | 280     | 8x6.5   | 0.36              | 280   | 8x10      | 0.17              | 450     | 8x10      | 0.34  | 369   |    |
| 150                            | 151       | 6.3x5.7   | 0.44              | 230   | 6.3x5.7   | 0.44              | 230   | 6.3x7.7 | 0.36              | 280   | 8x6.5     | 0.36              | 280     | 8x10    | 0.17              | 450   | 8x10      | 0.17              | 450     | 10x10     | 0.18  | 553   |    |
| 220                            | 221       | 6.3x5.7   | 0.44              | 230   | 6.3x7.7   | 0.36              | 280   | 6.3x7.7 | 0.36              | 280   | 6.3x7.7   | 0.36              | 280     | 8x10    | 0.17              | 450   | 8x10      | 0.17              | 450     | 10x10     | 0.12  | 650   |    |
| 330                            | 331       | 8x6.5     | 0.36              | 280   | 8x10      | 0.17              | 450   | 8x10    | 0.17              | 450   | 8x10      | 0.17              | 450     | 8x10    | 0.17              | 450   | 10x10     | 0.090             | 670     | 12.5x13.5 | 0.12  | 650   |    |
| 470                            | 471       | 8x10      | 0.17              | 450   | 10x7.7    | 0.17              | 450   | 10x7.7  | 0.17              | 450   | 10x7.7    | 0.17              | 450     | 10x10   | 0.09              | 670   | 10x10     | 0.090             | 670     | 12.5x13.5 | 0.070 | 820   |    |
| 680                            | 681       | 8x10      | 0.17              | 450   | 10x7.7    | 0.17              | 450   | 10x7.7  | 0.17              | 450   | 10x10     | 0.09              | 670     | 10x10   | 0.09              | 670   | 12.5x13.5 | 0.070             | 820     | 12.5x16   | 0.060 | 950   |    |
| 1,000                          | 102       | 8x10      | 0.17              | 450   | 10x10     | 0.09              | 670   | 10x10   | 0.09              | 670   | 12.5x13.5 | 0.070             | 820     | 12.5x16 | 0.060             | 950   | 12.5x16   | 0.060             | 950     | 16x16.5   | 0.073 | 1,000 |    |
| 1,500                          | 152       | 10x10     | 0.09              | 670   | 12.5x13.5 | 0.070             | 820   | 12.5x16 | 0.060             | 950   | 12.5x16   | 0.060             | 950     | 16x16.5 | 0.054             | 1,260 | 16x16.5   | 0.054             | 1,260   | 16x16.5   | 0.073 | 1,000 |    |
| 2,200                          | 222       | 12.5x13.5 | 0.070             | 820   | 12.5x16   | 0.060             | 950   | 16x16.5 | 0.054             | 1,260 | 16x16.5   | 0.060             | 950     | 16x16.5 | 0.054             | 1,260 | 18x16.5   | 0.048             | 1,500   | 18x16.5   | 0.066 | 1,500 |    |
| 3,300                          | 332       | 12.5x16   | 0.060             | 950   | 16x16.5   | 0.054             | 1,260 | 16x16.5 | 0.054             | 1,260 | 16x16.5   | 0.054             | 1,260   | 18x16.5 | 0.048             | 1,500 | 16x21.5   | 0.038             | 1,630   | 18x21.5   | 0.05  | 1,620 |    |
| 4,700                          | 472       | 16x16.5   | 0.054             | 1,260 | 16x16.5   | 0.054             | 1,260 | 16x16.5 | 0.054             | 1,260 | 16x16.5   | 0.054             | 1,260   | 18x16.5 | 0.048             | 1,500 | 16x21.5   | 0.038             | 1,630   | 18x21.5   | 0.038 | 1,630 |    |
| 6,800                          | 682       | 18x16.5   | 0.048             | 1,500 | 16x21.5   | 0.038             | 1,630 | 16x21.5 | 0.038             | 1,630 | 16x21.5   | 0.038             | 1,630   | 18x16.5 | 0.048             | 1,500 | 16x21.5   | 0.038             | 1,630   | 18x21.5   | 0.038 | 1,630 |    |
| 8,200                          | 822       | 18x16.5   | 0.048             | 1,500 | 16x21.5   | 0.038             | 1,630 | 18x21.5 | 0.038             | 1,750 |           |                   |         |         |                   |       |           |                   |         |           |       |       |    |

Dimension:  $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance:  $\Omega$ / at 100k Hz, 20°C

### Dimension and Permissible Ripple Current

| Rated Volt. (Voc) |          | 63V (1J)           |                |                | 80V (1K)          |      |     | 100V (2A)          |              |            |
|-------------------|----------|--------------------|----------------|----------------|-------------------|------|-----|--------------------|--------------|------------|
| Cap. ( $\mu$ F)   | Contents | $\phi D \times L$  | Imp.           | mA             | $\phi D \times L$ | Imp. | mA  | $\phi D \times L$  | Imp.         | mA         |
| 4.7               | 4R7      | 5×5.7              | 1.90           | 70             |                   |      |     |                    |              |            |
| 10                | 100      | 6.3×5.7            | 1.20           | 130            |                   |      |     |                    |              |            |
| 22                | 220      | 6.3×7.7            | 0.90           | 150            | 8×10              | 1.3  | 130 | 8×10               | 1.3          | 130        |
| 33                | 330      | 8×10               | 0.50           | 280            | 8×10              | 1.3  | 130 | 10×10              | 0.7          | 200        |
| 47                | 470      | 8×10               | 0.50           | 280            | 10×10             | 0.7  | 200 | 10×10              | 0.7          | 200        |
| 100               | 101      | 10×10              | 0.25           | 450            | 10×10             | 0.7  | 200 | 12.5×13.5          | 0.32         | 450        |
| 150               | 151      | 12.5×13.5          | 0.15           | 700            | 12.5×13.5         | 0.32 | 450 | 16×16.5            | 0.17         | 650        |
| 220               | 221      | 12.5×13.5          | 0.15           | 700            | 16×16.5           | 0.17 | 650 | 16×16.5<br>18×21.5 | 0.17<br>0.15 | 650<br>950 |
| 330               | 331      | 16×16.5            | 0.082          | 900            | 16×16.5           | 0.17 | 650 | 18×16.5<br>16×21.5 | 0.15<br>0.15 | 850<br>900 |
| 470               | 471      | 16×16.5            | 0.082          | 900            | 16×21.5           | 0.15 | 900 | 18×21.5            | 0.15         | 950        |
| 680               | 681      | 18×16.5<br>16×21.5 | 0.080<br>0.080 | 1,150<br>1,150 | 18×21.5           | 0.15 | 950 |                    |              |            |
| 1,000             | 102      | 18×21.5            | 0.06           | 1,250          |                   |      |     |                    |              |            |

### Part Numbering System

VZH Series    470 $\mu$ F     $\pm 20\%$     6.3V    Carrier Tape    8  $\phi \times 10L$

**VZH**    **471**    **M**    **0J**    **TR**    -    **0810**

Series Name    Capacitance    Capacitance Tolerance    Rated Voltage    Package Type    Terminal Type    Case Size

**XX**  
**S** = Standard  
**KS** = AEC-Q200 Qualified, Safety Critical Application  
**LS** = AEC-Q200 Qualified, Non-Safety Critical Application

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View VE-101M1CTR-0605S](#) on WIN SOURCE
- ⊖ [Surge Components](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management