



**THE DATASHEET OF
VLF3010ST-6R8MR65**



SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)


Conformity to RoHS Directive

VLF Series VLF3010S


FEATURES

- Miniature size
Mount area: 2.8×3.0mm
Low profile: 1.0mm max. height
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products contain no lead and also support lead-free soldering.
- It is a product conforming to RoHS directive.

SHAPES AND DIMENSIONS

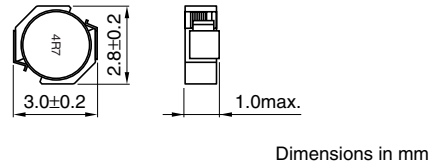

RECOMMENDED PC BOARD PATTERN



APPLICATIONS

Power source inductor for mobile devices such as mobile phones, HDDs, and DSCs

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (μH)	Inductance tolerance(%)	Test frequency (MHz)	DC resistance(Ω)		Rated current(A)*	
				max.	typ.	Based on inductance change max.	Based on temperature rise typ.
VLF3010ST-1R0N1R7	1	±30	1	0.049	0.041	1.7	2.3
VLF3010ST-2R2M1R1	2.2	±20	1	0.092	0.077	1.1	1.6
VLF3010ST-3R3MR88	3.3	±20	1	0.13	0.11	0.88	1.3
VLF3010ST-4R7MR75	4.7	±20	1	0.18	0.15	0.75	1.1
VLF3010ST-6R8MR65	6.8	±20	1	0.25	0.22	0.65	0.95
VLF3010ST-100MR53	10	±20	1	0.49	0.41	0.53	0.7
VLF3010ST-150MR38	15	±20	1	0.61	0.51	0.38	0.63
VLF3010ST-220MR34	22	±20	1	0.97	0.81	0.34	0.5


* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLF3010ST-1R0N1R7

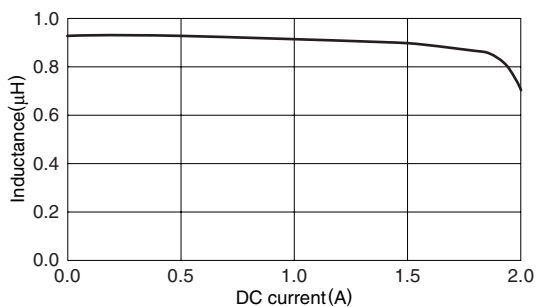


VLF3010ST-2R2M1R1

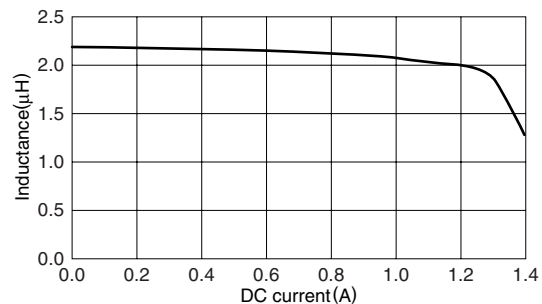


- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLF3010ST-3R3MR88

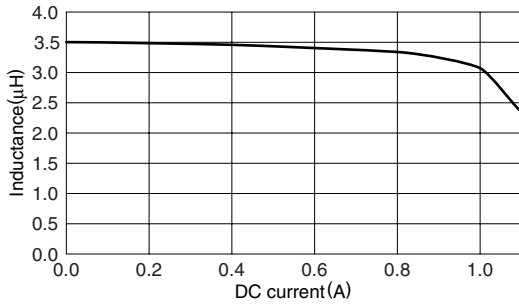


VLF3010ST-4R7MR75

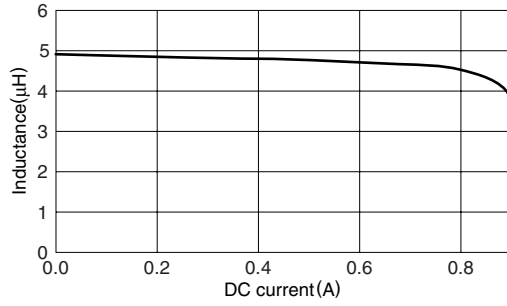


VLF3010ST-6R8MR65

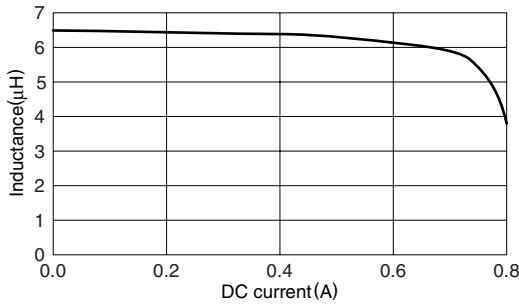


VLF3010ST-100MR53

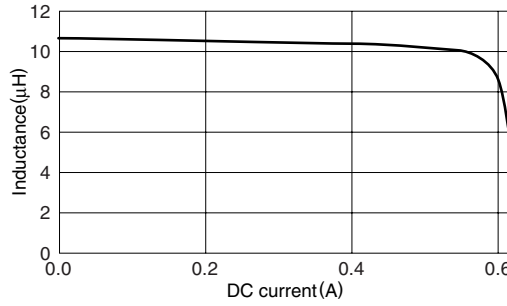


VLF3010ST-150MR38

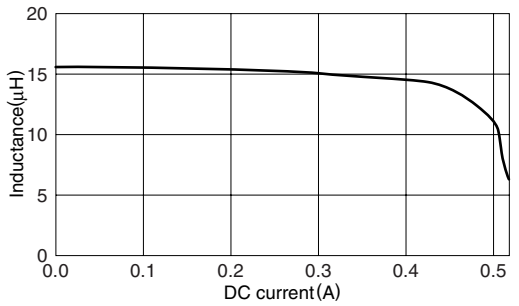

VLF3010ST-220MR34

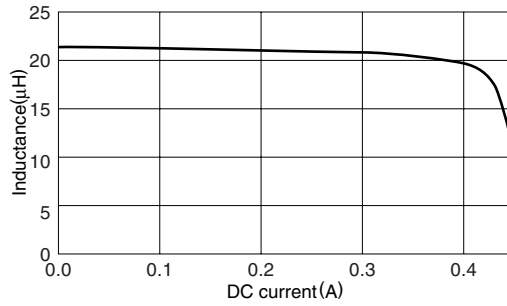

TEST CIRCUIT



- 1: LCR meter 4285A f=1MHz
- 2: DC constant current

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View VLF3010ST-6R8MR65 on WIN SOURCE](#)

 [TDK Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management