




# Static Shielding Bag 1000 Series



This transparent metal-in static shielding bag is designed to provide a static safe environment for sensitive electronic devices. Bags are printed with an ESD protective symbol and a lot code for traceability. Open top (1000) and ZipTop (3000) styles are available. The bags are heat sealable.


SCS Static Shielding Bags 1000 are manufactured from a polyester, metal, polyethylene laminate. The polyester dielectric in concert with the metal layer provides discharge shielding. The exterior being static dissipative allows electrostatic charges to be removed when grounded.

Meets ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3

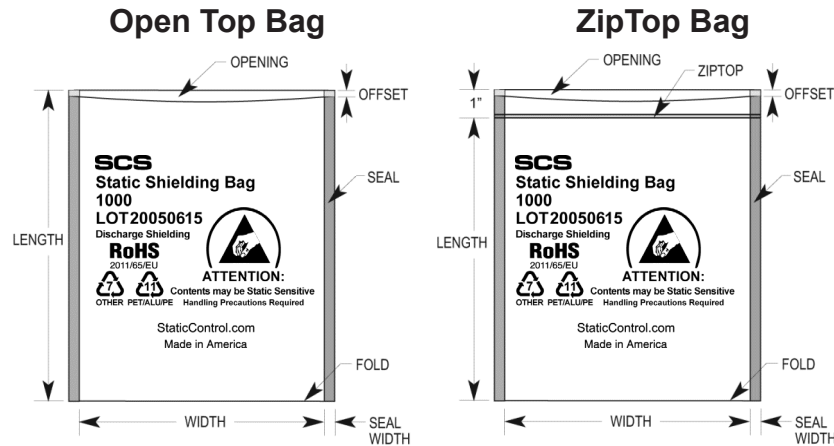

Tolerance: Width -0, +1/4"  
Length +/- 1/8" Offset 0 to 1/4"  
Seal width 3/8" with a tolerance of +/- 1/8"

Note: Standard bag markings shown above and are not to scale.

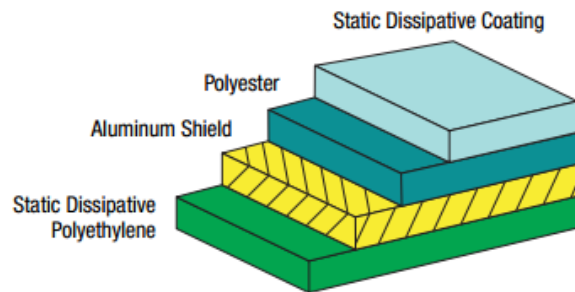

**RoHS 2, REACH, and Conflict Minerals Statement**  
None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Physical	Typical Value	Testing Method
Tensile Strength	4600 PSI, 32 MPa	ASTM D882
Puncture Resistance	12 lbs, 53 N	MIL-STD-3010C Method 2065
Seal Strength	11 lbs, 48 N	ASTM D882
Thickness	2.8 mils, 0.071 mm +/-10%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias
Electrical	Typical Value	Testing Method
ESD Shielding	<10 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	1 x 10 <sup>4</sup> to < 1 x 10 <sup>11</sup> ohms	ANSI/ESD STM11.11
Surface Resistance - Exterior	< 1 x 10 <sup>11</sup> ohms	ANSI/ESD STM11.11
Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	FTIR
Heat Sealing Conditions	Typical Value	
Temperature	300°F – 375°F, 149°C – 190°C	
Time	0.5 – 3.5 seconds	
Pressure	30 – 70 PSI, 206 – 482 KPa	

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.



Made in the United States of America


Specifications and procedures subject to change without notice.



<b>1000 SERIES STATIC SHIELDING BAG</b>		<b>DRAWING NUMBER</b>	<b>DATE</b>
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: StaticControl.com PHONE (919) 718-0000		1000 Series	June 2015

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 10026 on WIN SOURCE](#)

 [SCS Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management