




**THE DATASHEET OF**  
**10118241-001RLF**



10118241-001RLF - HDMI :  
HDMI Receptacle, Type D, Right  
Angle, DIP+ SMT leg

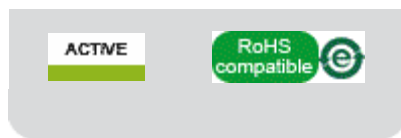

[www.fci.com](http://www.fci.com)

## Specifications

General	
Gender	Receptacle
Hold Down Style	Through Hole
Number of contacts	19
Orientation	Horizontal
Packaging	Tape and Reel
Style	D
Dimensional	
Thickness (Board - recommended)	0.6 mm
Electrical	
Current rating (Contact)	0.3A max.
Withstanding Voltage	250V AC
Resistance (Contact)	30 ohm max.
Resistance (Insulation)	100 M-ohm
Resistance (Shell)	50 ohm max.
Voltage rating	40V DC
Mechanical	
Durability (Mating cycles)	5,000
Withdrawal Force	5N min. 25N max.
Mating force	44.1N max.
Mounting	
Mounting style	Surface Mount
Mounting flange	None
Physical	
Color (Housing)	Black
Material (Contact)	Copper Alloy
Material (Housing)	LCP
Plating (Contact area)	15u" Au
Plating (Shield)	80u' Tin
Plating (Solder tail)	1u" Au
Material (Metal Shell)	Stainless Steel
Temperature (Operating)	-40°C to +85°C
Other Features	
Most Popular Configuration	Yes



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 10118241-001RLF on WIN SOURCE](#)

 [Amphenol Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management