



THE DATASHEET OF
2716



Technical Data Sheet

Ag

Ni


Sn

Cu

Purpose	Conductive woven fabric for general use (outside skin for EMI/RFI fabric over foam gaskets, shielding material for laminated flat I/O shielding panels, EMI/RFI cable shielding)
Description	Tin copper silver plated polyamide ripstop fabric
Surface resistivity	< 0.02 Ohms/□
Shielding effectiveness	Average up to 80 db from 300Mhz to 10Ghz
Temperature range	-30°C to 90°C
Total thickness	0.110mm ± 10%
Weight	77g/m ² ± 10%
Roll width	130cm ± 3%
Roll length	max 200m

Compliance and Certification

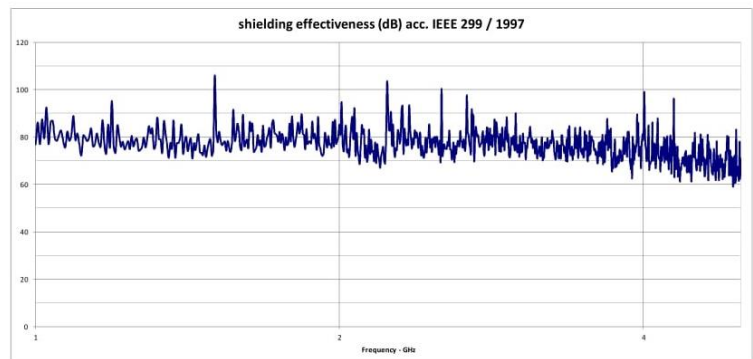

RoHS
REACH



Alterations Reserved
04.03.2014/07

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2716 on WIN SOURCE](#)
-  [Kitronik Ltd. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management