

2N5164 thru 2N5171 (SILICON)



SOLID STATE INC.

46 FARRAND STREET
BLOOMFIELD, NEW JERSEY 07003

www.solidstateinc.com


THYRISTORS SILICON CONTROLLED RECTIFIERS

... designed for industrial and consumer applications such as power supplies, battery chargers, temperature, motor, light and welder controls.

- Supplied in Either Pressfit or Stud Package
- High Surge Current Rating – $I_{TSM} = 240$ Amp
- Low On-State Voltage – 1.2 V (Typ) @ $I_{TM} = 20$ Amp
- Practical Level Triggering and Holding Characteristics – 10 mA (Typ) @ $T_C = 25^\circ\text{C}$

THYRISTORS PNPN

50-600 VOLTS
20 AMPERES RMS



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
*Peak Reverse Blocking Voltage (1) 2N5164,2N5168 2N5165,2N5169 2N5166,2N5170 2N5167,2N5171	V_{RRM}	50 200 400 600	Volts
*Non-repetitive Peak Reverse Blocking Voltage 2N5164,2N5168 2N5165,2N5169 2N5166,2N5170 2N5167,2N5171	V_{RSM}	75 300 500 700	Volts
Forward Current RMS	$I_T(RMS)$	20	Amp
Circuit Fusing Considerations ($T_J = -40$ to $+100^\circ\text{C}$, $t \leq 8.3$ ms)	I^2t	235	A^2s
*Peak Forward Surge Current (One cycle, 60 Hz, $T_J = -40$ to $+100^\circ\text{C}$)	I_{TSM}	240	Amp
*Peak Forward Gate Power	P_{GFM}	5.0	Watts
*Average Forward Gate Power	$P_{GF(AV)}$	0.5	Watt
*Peak Forward Gate Current	I_{GFM}	2.0	Amp
Peak Gate Voltage – Forward (2)	V_{GFM}	10	Volts
Reverse	V_{GRM}	10	Volts
*Operating Junction Temperature Range	T_J	-40 to +100	$^\circ\text{C}$
*Storage Temperature Range	T_{stg}	-40 to +150	$^\circ\text{C}$
Stud Torque (3)	2N5168-2N5171	30	in. lb.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
*Thermal Resistance, Junction to Case 2N5164,65,66,67 2N5168,69,70,71	θ_{JC}	1.0 1.1	1.5 1.6	$^\circ\text{C}/\text{W}$

* Indicates JEDEC Registered Data.

- (1) V_{RRM} for all types can be applied on a continuous dc basis without incurring damage. Ratings apply for zero or negative gate voltage. Devices should not be tested for blocking capability in a manner such that the voltage applied exceeds the rated blocking voltage.
- (2) Devices should not be operated with a positive bias applied to the gate concurrent with a negative potential applied to the anode.
- (3) Reliable operation can be impaired if torque rating is exceeded, terminal tubes bent, or glass seal broken.

STYLE 1
TERM 1 GATE
2 CATHODE
3 ANODE

2N5164
2N5165
2N5166
2N5167

All JEDEC dimensions and notes apply

TO-203AA

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	12.726	12.827	0.501	0.505
B	11.811	12.065	0.465	0.475
C	8.39	9.65	0.330	0.380
E	2.54	-	0.100	-
F	0.89	1.72	0.035	0.066
J	2.04	2.46	0.080	0.097
K	-	20.32	-	0.800
N	-	12.95	-	0.510
O	1.66	2.28	0.065	0.090

STYLE 1
TERM 1 CATHODE
2 GATE
3 STUD ANODE

2N5168
2N5169
2N5170
2N5171

TO-48

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	15.34	15.50	0.604	0.614
B	14.00	14.20	0.551	0.559
C	20.70	24.13	0.815	0.950
F	1.40	1.65	0.055	0.065
H	2.29	REF	0.090	REF
J	10.67	11.56	0.420	0.455
K	9.78	10.54	0.385	0.415
L	8.99	7.75	0.275	0.305
O	2.03	2.41	0.080	0.095
R	1.55	REF	0.065	REF
T	12.70	12.83	0.500	0.505

2N5164 thru 2N5171

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
*Peak Forward Blocking Voltage ($T_J = 100^\circ\text{C}$) 2N5164, 2N5168 2N5165, 2N5169 2N5166, 2N5170 2N5167, 2N5171	$V_{DRM}(1)$	50 200 400 600	— — — —	Volts
*Peak Forward Blocking Current (Rated V_{DRM} @ $T_J = 100^\circ\text{C}$, gate open)	I_{DRM}	—	5.0	mA
Peak Reverse Blocking Current (Rated V_{RRM} @ $T_J = 100^\circ\text{C}$, gate open)	I_{RRM}	—	5.0	mA
Gate Trigger Current (Continuous dc) (Anode Voltage = 7.0 Vdc, $R_L = 100 \Omega$) *(Anode Voltage = 7.0 Vdc, $R_L = 100 \Omega$, $T_C = -40^\circ\text{C}$)	$I_{GT}(2)$	— —	40 75	mA
Gate Trigger Voltage (Continuous dc) (Anode Voltage = 7.0 Vdc, $R_L = 100 \Omega$) *(Anode Voltage = 7.0 Vdc, $R_L = 100 \Omega$, $T_C = -40^\circ\text{C}$) *(Anode Voltage = Rated V_{DRM} , $R_L = 100 \Omega$, $T_J = 100^\circ\text{C}$)	V_{GT} V_{GD}	— 0.2	1.5 —	Volts
Forward "ON" Voltage (pulsed, 1.0 ms max, duty cycle $\leq 1\%$) ($I_{TM} = 20 \text{ A}$) ($I_{TM} = 41 \text{ A}$)	V_{TM}	— —	1.5 1.7	Volts
Holding Current (Anode Voltage = 7.0 Vdc, gate open) *(Anode Voltage = 7.0 Vdc, gate open, $T_C = -40^\circ\text{C}$)	I_H	— —	50 90	mA
Turn-On Time ($t_d + t_r$) ($I_{TM} = 20 \text{ A}$, $I_{GT} = 40 \text{ mAdc}$)	t_{on}	TYPICAL 1.0		μs
Turn-Off Time ($I_{TM} = 10 \text{ A}$, $I_R = 10 \text{ A}$) ($I_{TM} = 10 \text{ A}$, $I_R = 10 \text{ A}$, $T_J = 100^\circ\text{C}$) ($V_{DRM} = \text{rated voltage}$) ($dv/dt = 30 \text{ V}/\mu\text{s}$)	t_{off}	20 30		μs
Forward Voltage Application Rate (Gate open, $T_J = 100^\circ\text{C}$)	dv/dt	50		$\text{V}/\mu\text{s}$

*Indicates JEDEC Registered Data.

(1) V_{DRM} for all types can be applied on a continuous dc basis without incurring damage. Ratings apply for zero or negative gate voltage. These devices should not be tested with a constant current source for forward or reverse blocking capability such that the voltage applied exceeds the rated blocking voltage.

(2) For optimum operation, i.e. faster turn-on, lower switching losses, best di/dt capability, recommended $I_{GT} = 200 \text{ mA}$.

EFFECT OF TEMPERATURE UPON TYPICAL TRIGGER CHARACTERISTICS

FIGURE 1 – GATE TRIGGER CURRENT


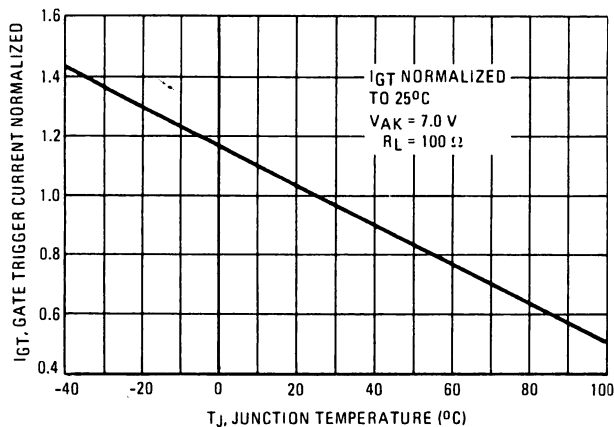


FIGURE 2 – GATE TRIGGER VOLTAGE

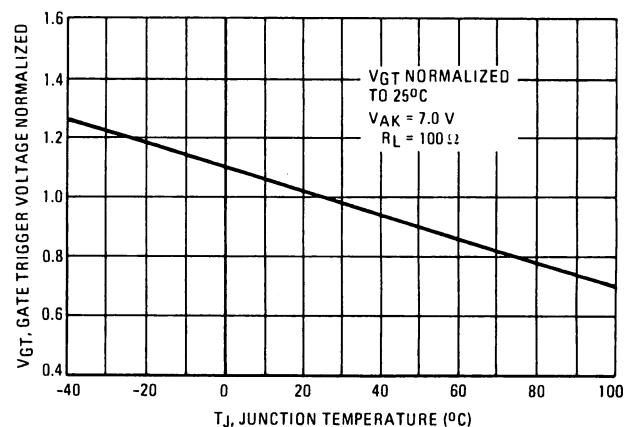

2N5164 thru 2N5171

MAXIMUM ALLOWABLE NON-RECURRENT SURGE CURRENT

FIGURE 3 - 60 Hz SURGES

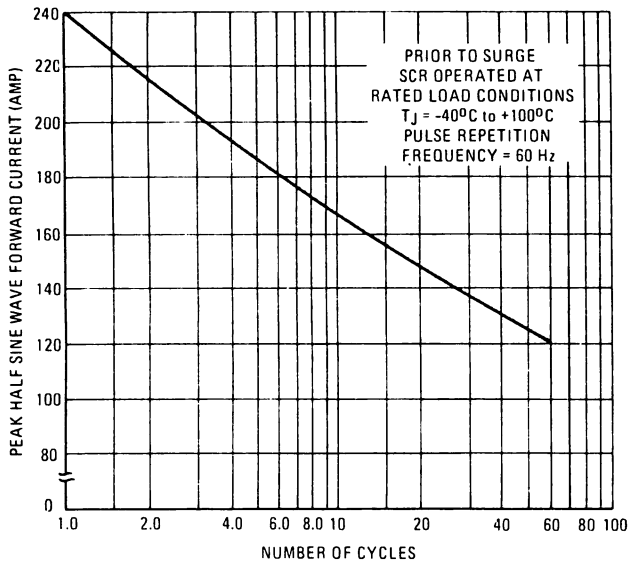


FIGURE 4 - SUB-CYCLE SURGES

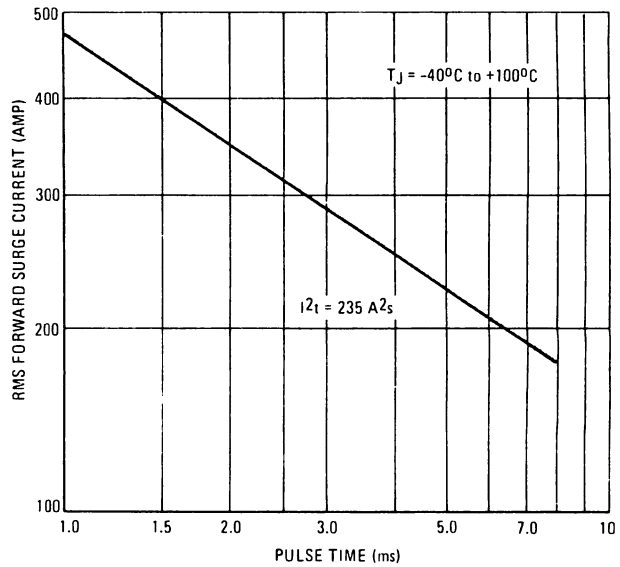


FIGURE 5 - GATE TRIGGER CHARACTERISTICS


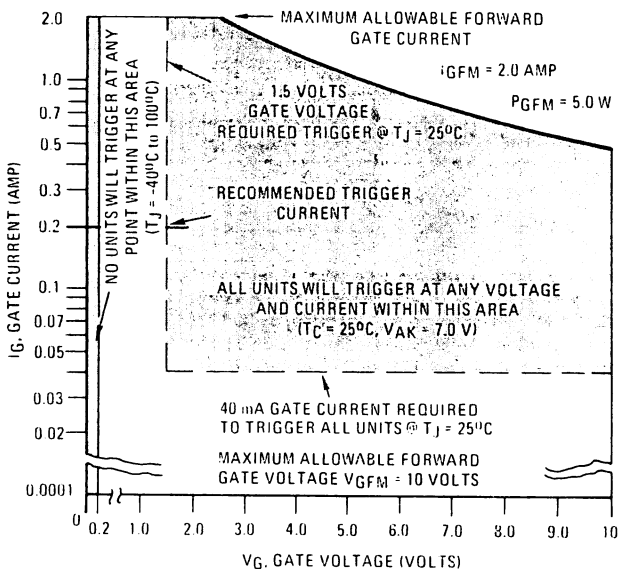


FIGURE 6 - EFFECT OF TEMPERATURE ON TYPICAL HOLDING CURRENT

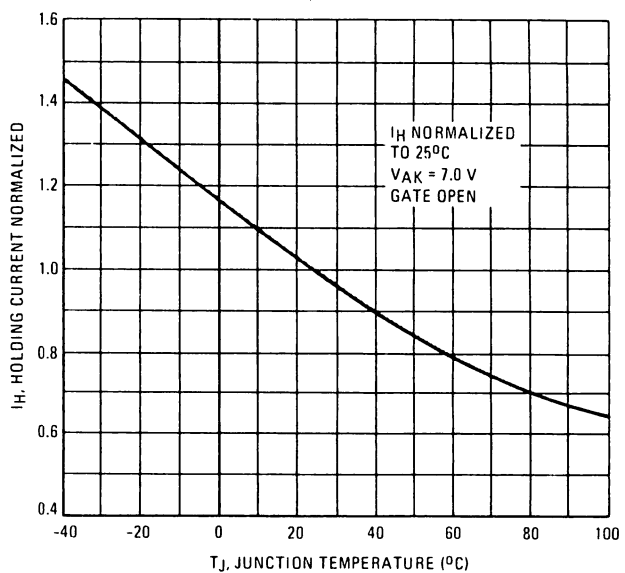

DERATING AND DISSIPATION FOR RESISTIVE AND INDUCTIVE LOADS (f = 60 to 400 Hz, SINE WAVE)

FIGURE 7 - CURRENT DERATING⁽¹⁾

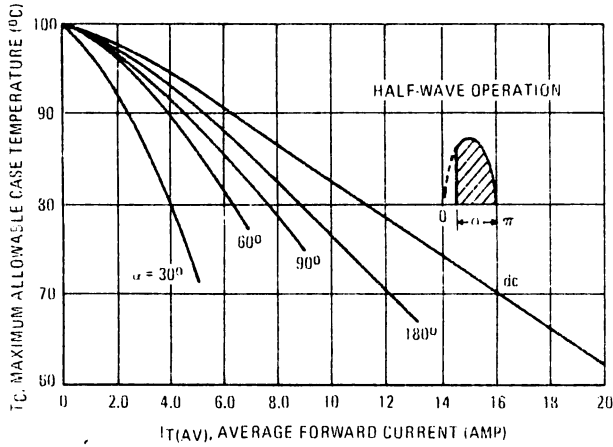


FIGURE 8 - FORWARD POWER DISSIPATION

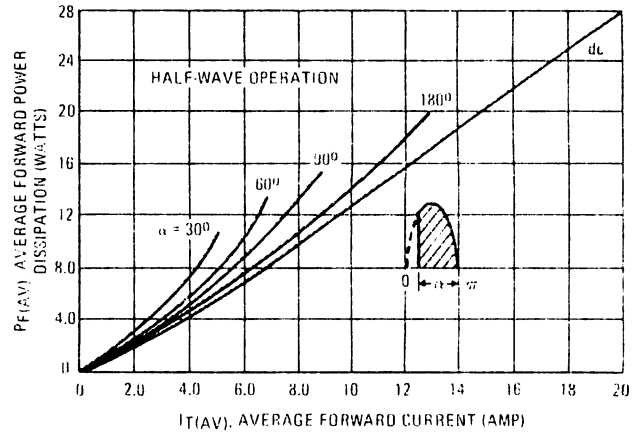


FIGURE 9 - FORWARD CONDUCTION CHARACTERISTICS


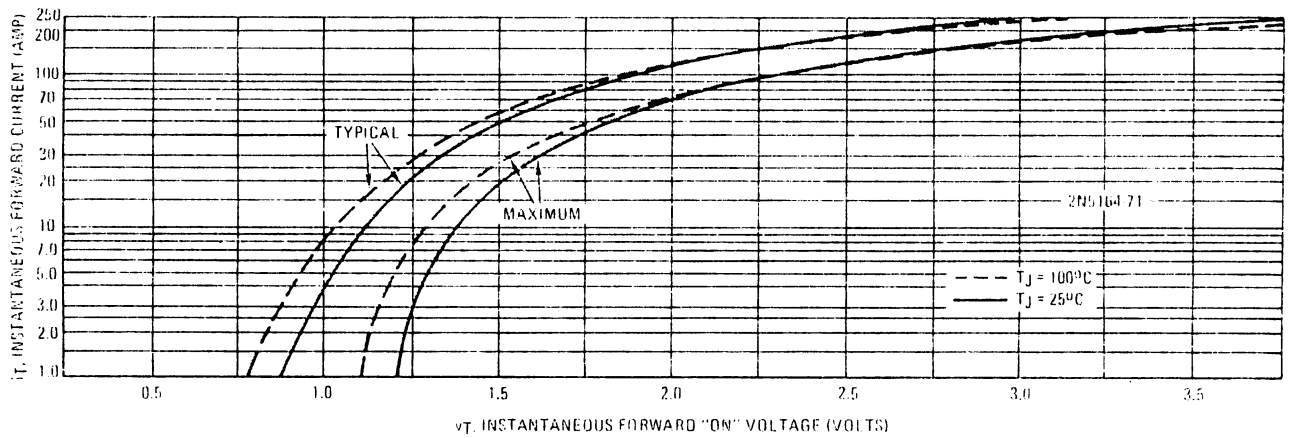




FIGURE 10 - TYPICAL THERMAL RESISTANCE OF PLATES





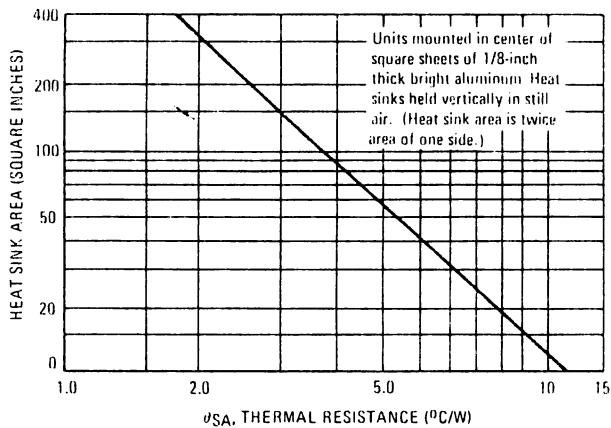



⁽¹⁾ Reverse polarity units must be derated an additional 10%, i.e., in Figure 7 the maximum allowable case temperature of the 2N5164 at 16 Adc is 70°C, a derating of 30°C below the maximum junction temperature.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 2N5171 on WIN SOURCE](#)
-  [Solid State Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management