
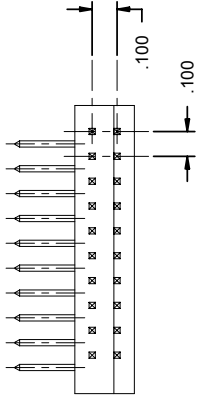



NOTES:
 1. CURRENT RATING = ONE AMPERE
 DIELECTRIC WITHSTAND VOLTAGE = 100 VDC
 INSERTION FORCE = 120 GRAMS
 WITHDRAWAL FORCE = 50 GRAMS

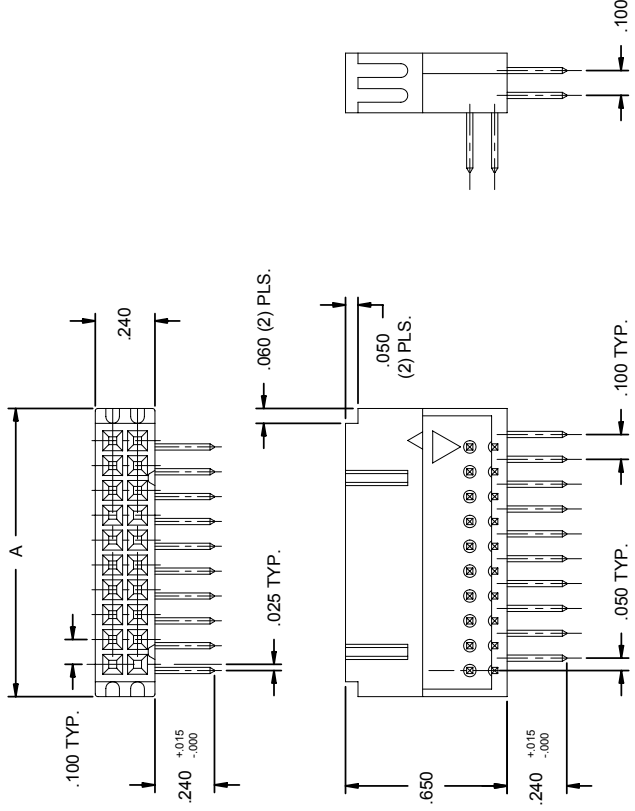

1. CONTACTS:
 Cu 770; NICKEL A 18 g

2. INSULATOR:
 GLASS FILLED PBT RESIN
 COLOR: WHITE

L. GOLDSTEIN 6-11-90
 M. NEAL 6-13-90
 M. NEAL 6-13-90

±.010

D 90-096 REDRAW

CUS


CC

922

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 922576-26-I on WIN SOURCE](#)

 [3M Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management