






# THE DATASHEET OF H2009FNLT



) WITH FLAMMABILITY  
 ) +125°C

TTY AT 245°C REFLOW PROFILE  
 O MOISTURE SENSITIVE  
 MAXIMUM THROUGH REFLOW SOLDER  
 NG ADD A "T" SUFFIX  
 NL BECOMES H2009FNLT).


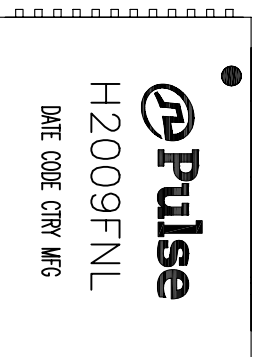


FINAL OUTLINE



All rights reserved. Pulse confidential & proprietary. (06/17/14)

TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
H2009FNLT-10	PS-2745.001-A	1 OF 3	H2009FNLT	A



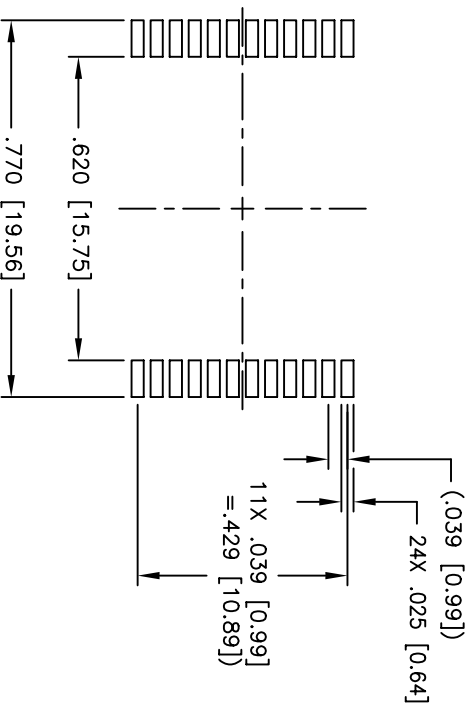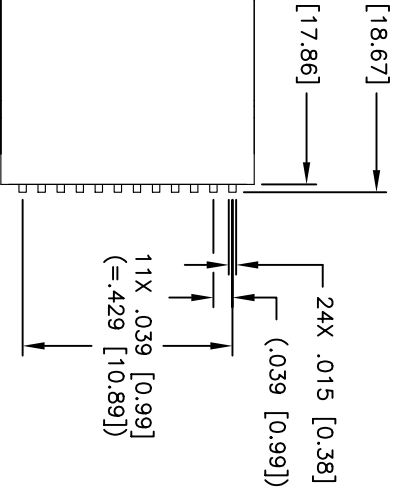

**SUGGESTED LAND PATTERN**

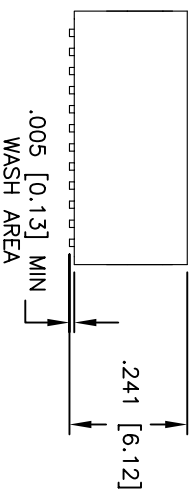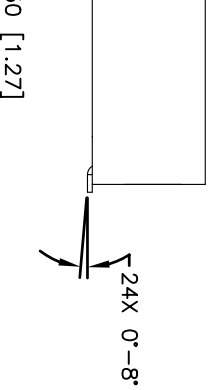



WITH THE FOLLOWING  
REFERENCE ONLY.

All rights reserved. Pulse confidential & proprietary. (06/17/14)

ITLA DRAWING 22009FNL-10	PS DRAWING PS-2745.001-A	SHEET 3 OF 3	PART NO. H2009FNL	DATASHEET REV. A
-----------------------------	-----------------------------	-----------------	----------------------	---------------------

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View H2009FNLT on WIN SOURCE](#)
-  [Pulse Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management