





THE DATASHEET OF 290TX



DIMENSIONS:	
A	3.438" ±0.063
B	4.300" ±0.125
C	4.125" ±0.063
D	1.960" ±0.063
E	2.750" ±0.063
F	3.438" ±0.063

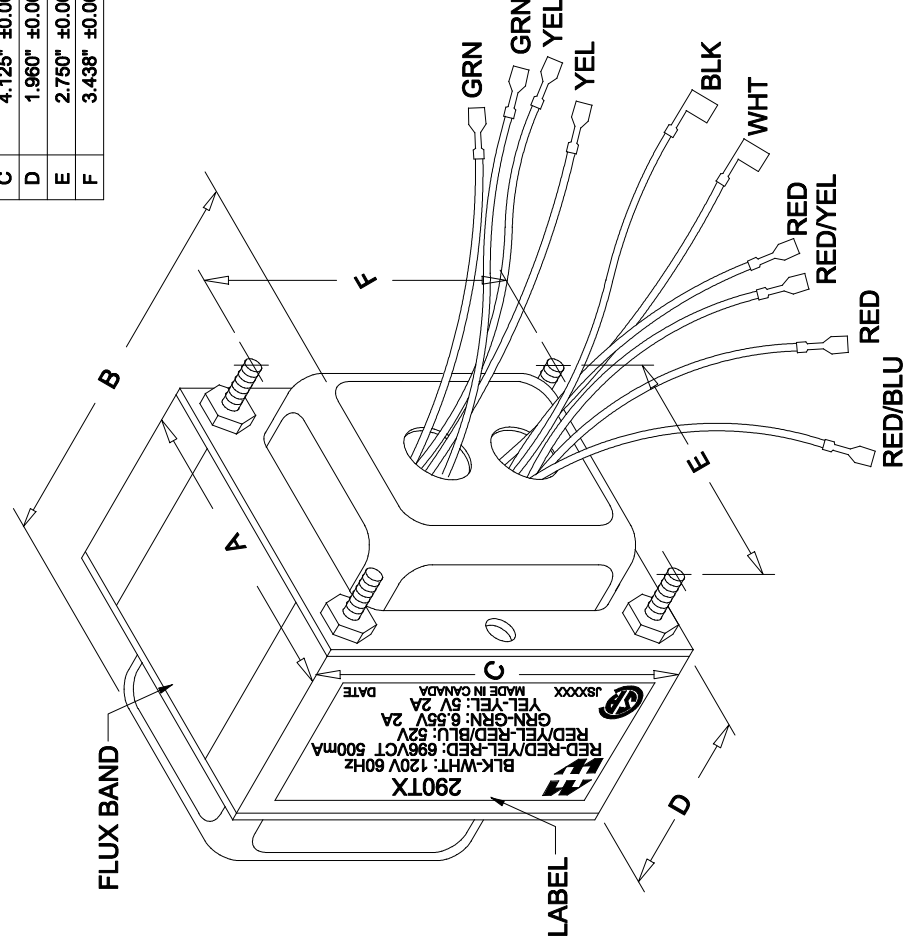

NOTE: ALL LEADS 12" OUT MIN.

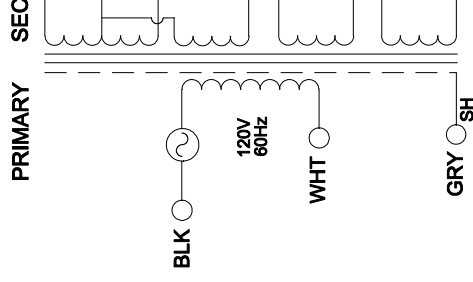



TESTS	CONDITIONS	ELECT	
		PRIMARY	SECONDARY
Iex	@ 120V, 60Hz, BLK - WHT		
Sec. N.L.V	@ 120V, 60Hz, BLK - WHT		
	RED - RED/YEL = RED/Y		
	RED/YEL -		
DCR	@ 20°C, BI		
	@ 20°C, R		
	@ 20°C, RED/YEL -		
	@ 20°C, Y		
	@ 20°C, G		
HIPOT	PRIMARY - SECONDARY		

REV.#	REVISION	DATE	ELECTRONIC DIVISION	
0	RELEASED.	12/01/10	52 RANKIN PLACE,	
			WATERLOO, ONTARIO	
			TITLE: 290TX	
			TRANSFORM	
			DWG. BY: C. ILIE	CHK'D BY:
			DATE: 12/01/10	APP'D. BY:
			DIMENSIONS: IN(X) MM()	

HAMMOND
MANUFACTURING™

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 290TX on WIN SOURCE](#)
-  [Hammond Manufacturing Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management