



**THE DATASHEET OF
PI3EQX10908ZFE**



PI3EQX10908

10.Gbps 8-Channel PCIe ReDriver™ with Pinstrap and I²C Control and FlowThrough Pinout

Pericom Semiconductor's PI3EQX10908 is a lower power, high performance 8-differential channels PCIe ReDriver™.

The device provides per channel programmable equalization, output swing, de-emphasis, and amplifier gain.

The PI3EQX10908 provides master/slave I²C Control, to optimize performance over a variety of physical mediums by reducing Inter-symbol interference.

PI3EQX10908 supports eight 100-Ohm Differential data I/O's and extends the signals across other distant data pathways on the user's platform.

Pericom PI3EQX10908 offers programmable transmit de-emphasis (up to 9 dB), transmit V_{OD} (up to 1200 mVp-p) and receive equalization (up to 35.7 dB) to enable longer distance transmission in lossy copper cables (10m+), or backplanes (40"+) with multiple connectors. The receiver is capable of opening an input eye that is completely closed due to inter-symbol interference (ISI) introduced by the interconnect medium.

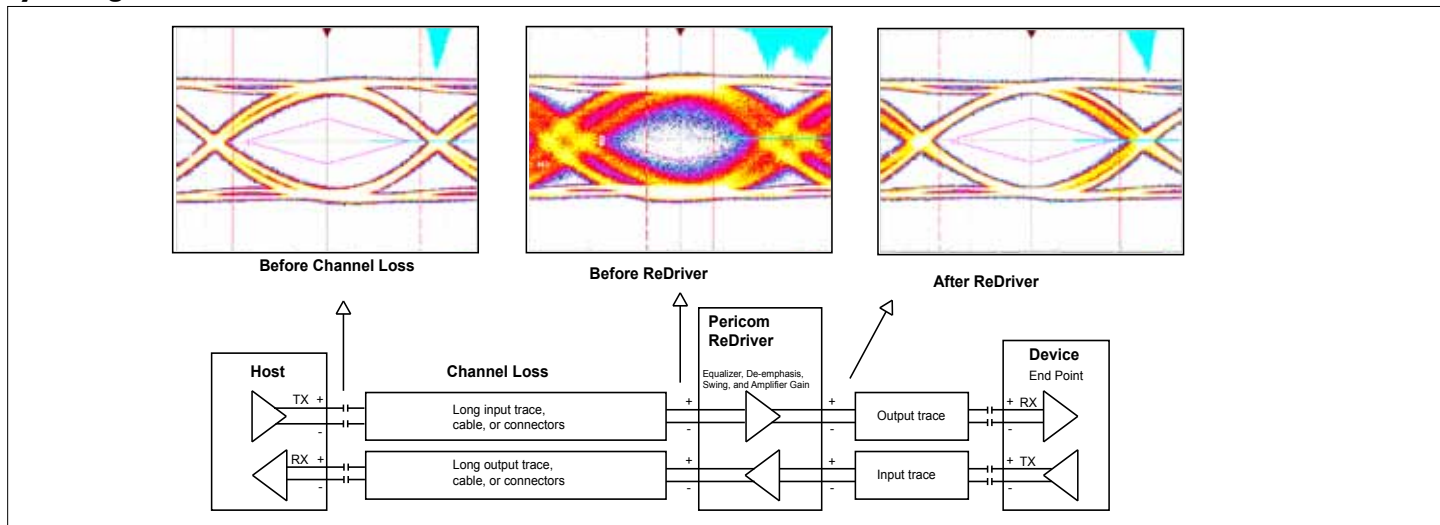
The programmable settings can be applied easily via pins, software (I²C) or loaded via an external EEPROM.

When operating in the EEPROM mode, the configuration information is automatically loaded on power up, which eliminates the need for an external microprocessor or software driver.

Features



- ➔ Support up to 11.3Gbps serial link and KR backplane
- ➔ Ideal for 10Gb and 40Gb Ethernet applications, 10Gb fiber channel, and 10Gb SFI, XFI and KR, up to 11.3Gbps data rates
- ➔ 8-Channel in FlowThrough pinout (PI3EQX10908)
- ➔ Independent channel configuration of receiver equalization, output swing, de-emphasis, and amplifier gain
- ➔ Per Channel Activity Detector with selectable input termination between 50Ω to V_{DD} and > 200KΩ
- ➔ Per channel output termination detect on power-up with selectable output termination between 100Ω differential and High Impedance
- ➔ Pin strap and I²C master/slave selectable device programming with external EEPROM
- ➔ 4-bit selectable address bit for I²C
- ➔ Supply Voltage: 3.3V±10%
- ➔ Packaging (Pb-free & Green):
 - 54-contact TQFN (11mm x 5mm, 0.5mm pitch) (PI3EQX10908)

Eye Diagram



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PI3EQX10908ZFE on WIN SOURCE](#)
-  [Diodes Incorporated Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management