



**THE DATASHEET OF
PM8561B-F3EI**



Switchtec™ PFX-L Fanout-Lite PCIe® Gen3 Switch Family

PM8566, PM8565, PM8564, PM8563, PM8562 and PM8561

Summary

The Switchtec PFX-L Fanout-Lite PCIe Gen3 Switch Family is composed of PCIe Base Specification 3.1-compliant switches supporting up to 96 lanes, six virtual switch partitions, two non-transparent bridges (NTBs), six hot-plug controllers, and comprehensive diagnostics and debug capabilities.

Typical applications for the PFX-L include data center equipment, defense and industrial servers, workstations, test equipment, video production and broadcasting equipment, cellular infrastructure, access networks, metro networks and core networking.



Features

High-Performance Non-Blocking Switches

- Up to 174 GB/s switching capacity
- 96-lane, 80-lane, 64-lane, 48-lane, 32-lane and 24-lane variants
- Ports bifurcate to x4/x8/x16 lanes
- Up to two NTBs assignable to any port
- Logical non-transparent (NT) interconnect allows for larger topologies
- Supports 1+1 and N+1 failover mechanisms
- NT address translation using direct windows and multiple sub-windows per BAR
- Supports multicast groups per port

Error Containment

- Advanced error reporting (AER) on all ports
- Hot-plug controllers
- GPIOs configurable for different cable/connector standards

PCIe Interfaces

- Passive, managed and optical cables
- SHPC-enabled slot and edge connectors

Diagnostics and Debug

- Transaction layer packet (TLP) generator for testing and debugging of links and error handling
- Real-time eye capture
- Any-to-any port mirroring for debug purposes
- External loopback at PHY and TLP layers
- Errors, statistics, performance and TLP latency counters

Peripheral I/O Interfaces

- Up to two (master/slave) two-wire interfaces (TWIs) with SMBus support
- Up to 78 parallel GPIO pins
- 1 UART
- 1 QSPI with optional inline ECC
- JTAG and EJTAG interface

Highlights

- Hot-plug controllers, end-to-end data integrity protection, high-quality and low-power fifth generation SERDES
- Comprehensive diagnostics and debugging: PCIe generator and analyzer, per-port performance and error counters, multiple loopback modes and real-time eye capture
- Up to 24 ports, two NTBs, and six virtual switch partitions
- Flexible x4, x8, and x16 port bifurcation with no restrictions on configuring ports as either upstream or downstream, or on mapping ports to NTBs

High-Speed I/O

- PCIe Gen3 8 GT/s
- Supports PCIe-compliant link training and manual PHY configuration

Power Management

- Active State Power Management (ASPM)
- Software controlled power management

Chiplink Diagnostic Tools

- Extensive debug, diagnostics, configuration and analysis tools with an intuitive GUI
- Access to configuration data, management capabilities and signal integrity analysis tools (such as real-time eye capture)
- Connects to device over in-band PCIe or sideband signals (UART, TWI and EJTAG)

Ordering Information


| Product | Lanes | Ports/NTBs | Virtual Switch Partitions | Hot-Plug Controllers | Package | Ordering Number |
|-------------|-------|------------|---------------------------|----------------------|-------------------|-----------------|
| PFX-L 96xG3 | 96 | 24/2 | 6 | 6 | 37.5 mm × 37.5 mm | PM8566B-FEI |
| PFX-L 80xG3 | 80 | 20/2 | 6 | | 37.5 mm × 37.5 mm | PM8565B-FEI |
| PFX-L 64xG3 | 64 | 16/2 | 6 | | 37.5 mm × 37.5 mm | PM8564B-FEI |
| PFX-L 48xG3 | 48 | 12/2 | 6 | | 27 mm × 27 mm | PM8563B-F3EI |
| PFX-L 32xG3 | 32 | 8/2 | 4 | | 27 mm × 27 mm | PM8562B-F3EI |
| PFX-L 24xG3 | 24 | 6/2 | 3 | | 27 mm × 27 mm | PM8561B-F3EI |

Evaluation Kit

The evaluation kit is a device evaluation environment supporting multiple host and SSD interfaces. The following kit is available for evaluating PSX, PFX, PFX-I and PFX-L features using the populated PSX 96xG3 device on the PM5461-KIT:

- PM5461-KIT - PSX/PFX/PFX-I/PFX-L 96/80/64xG3 PCIe Switch HD Evaluation Kit (PMC-2151996)

Example Application

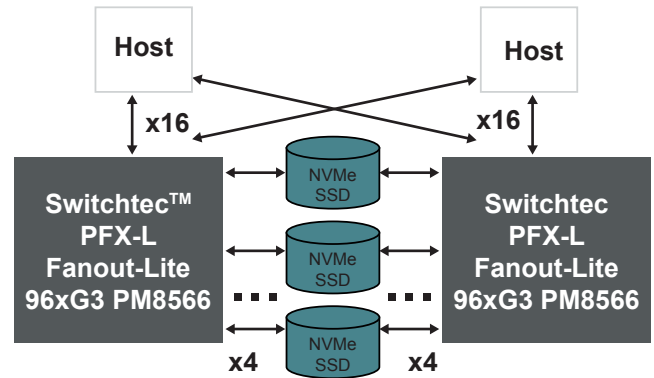

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View PM8561B-F3EI on WIN SOURCE](#)
- ⊖ [Microchip Technology Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management