



**THE DATASHEET OF  
SL22 5R012**






ISO9001:2008 Certified

**Mechanical Specifications (mm)**

D:	22.0	± max
T:	6.0	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.22	± nom
C:	3.92	± nom

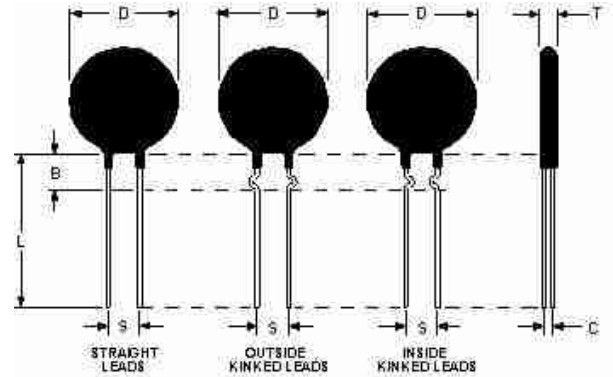

**Electrical Specifications**

Resistance:	5.0	Ω	± 20 %
Max Steady State Current upto 65°C:	12.00	A	
Max Rec. Energy Rating:	100	J	
Actual Failure Instantaneous Energy:	210	J	
Maximum Capacitance @ 120 VAC:	6,400	µf	
Maximum Capacitance @ 240 VAC:	1,500	µf	
Resistance @ 100% Max Current:	0.05	Ω	
Resistance @ 50% Max Current:	0.12	Ω	
Body Temperature at 100% Max Current:	214.00	°c	
Dissipation Constant:	32.4	mw/°c	
Thermal Time Constant:	94	Sec.	
Material Type (for Beta and Curve):	G		

<b>SL22 5R012</b>	
Date: 10/31/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL22 5R012 on WIN SOURCE](#)

 [Ametherm Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management