




**THE DATASHEET OF  
SXA-001T-P0.6**



## Tool Specification

1. Part Number: YRS-692
2. Terminal: SXA-001T-P0.6 / SXM-001T-P0.6 / SXAM-001T-P0.6
3. Application

Crimp Position	AWG UL1007	Tensile Strength N (kgf)	Strip Length mm
28-26	AWG 28	10(1.0) min.	2.0
28-26	(AWG 26)	(20(2.0) min.)	2.0
24-22	AWG 24	30(3.1) min.	2.0
24-22	(AWG 22)	(40(4.1) min.)	2.0

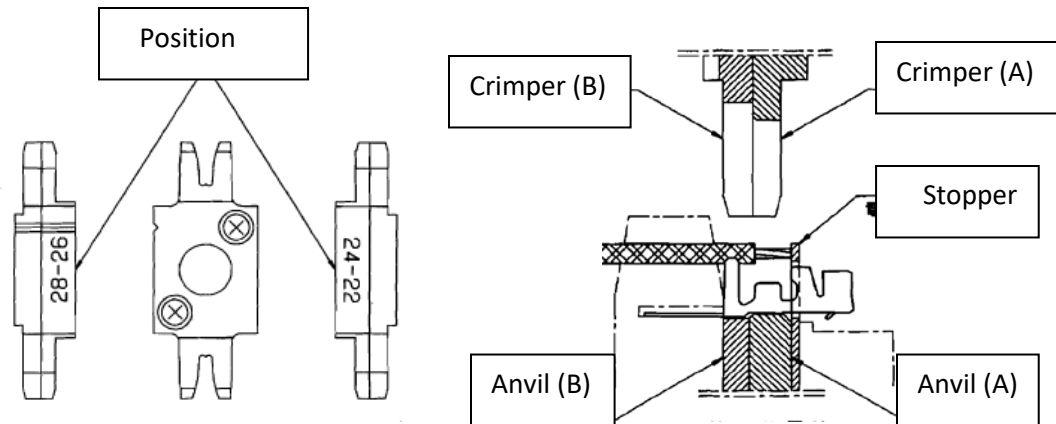

PART NUMBER	DESCRIPTION
YRS 7014-1018 CRIPMER ASSY	UPPER CRIPMER ASSEMBLY
YRS 7014-0548 ANVIL A	CONDUCTOR ANVIL
YRS 7014-0198 ANVIL B	INSULATION ANVIL
YRS 7014-0418 SHEAR BLADE	SHEAR BLADE

- Check the crimp appearance and tensile strength prior to use.
- Select the appropriate crimp position based on the wire size that will be used.
- The wire size in ( ) above could cause excessive crimping. Check the tensile strength and crimp appearance to confirm an acceptable crimp.
- The insulation barrel is set for the type of wire listed and is not adjustable.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View SXA-001T-P0.6 on WIN SOURCE](#)
- ⊖ [JST Sales America Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management