




**THE DATASHEET OF
3RA68128AB**



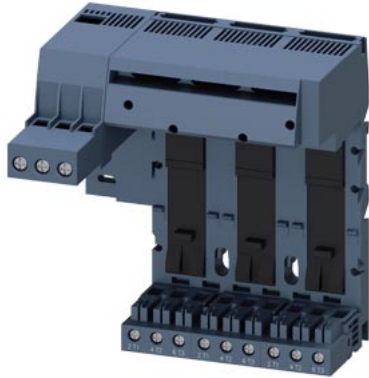

Infeed left Connection main circuit: screw terminal 3 slots for compact load feeders Connection terminal maximum 25 mm² / 35 mm²

General technical data		
product brand name		SIRIUS
product designation		infeed left
protection class IP on the front according to IEC 60529		IP20; IP20 with box terminal/cover
touch protection on the front according to IEC 60529		Finger-safe, for vertical contact
degree of pollution		3
number of slots for compact feeder		3
installation altitude at height above sea level maximum	m	2 000
ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operation	°C	-20 ... +60
vibration resistance		f = 4 to 5.8 Hz; d = 15 mm; f = 5.8 to 500 Hz; a = 2 m / s ² 10 cycles
shock resistance		Semi-sinusoidal a = 6 m/s ² at 10 ms; 3 pos. and 3 neg. Shock in all axes
reference code		
• according to IEC 81346-2		W
• according to EN 61346-2		W
Main circuit		
operational current at AC at 400 V rated value	A	63
operating voltage at AC-3 rated value maximum	V	690
Installation/ mounting/ dimensions		
fastening method		screw and snap-on mounting
width	mm	180
height	mm	197
depth	mm	144
Connections/ Terminals		
type of electrical connection for main current circuit		screw-type terminals
design of screw-type connection for main contacts		M3
stripped length for main contacts	mm	13
tightening torque for main contacts with screw-type terminals	N·m	3 ... 4.5
type of connectable conductor cross-sections for supply for main contacts using the upper clamping point		
• solid		2.5 ... 35 mm ²
• stranded		2.5 ... 35 mm ²
• finely stranded with core end processing		2.5 ... 25 mm ²

<ul style="list-style-type: none"> finely stranded without core end processing 		2.5 ... 25 mm ²
type of connectable conductor cross-sections for supply for main contacts using the lower clamping point <ul style="list-style-type: none"> solid stranded finely stranded with core end processing finely stranded without core end processing 		2.5 ... 35 mm ² 2.5 ... 35 mm ² 2.5 ... 25 mm ² 2,5 ... 25 mm ²
type of connectable conductor cross-sections for supply for main contacts using both clamping points <ul style="list-style-type: none"> solid stranded finely stranded with core end processing finely stranded without core end processing 		2 x (2.5 ... 25 mm ²) 2 x (2.5 ... 25 mm ²) 2 x (2.5 ... 16 mm ²) 2 x (2.5 ... 16 mm ²)
type of connectable conductor cross-sections at AWG cables <ul style="list-style-type: none"> for supply for main contacts using the upper clamping point for supply for main contacts using the lower clamping point for supply for main contacts using both clamping points for main contacts for load-side outgoing feeder 		12 ... 2 12 ... 2 2 x (16 ... 2) 2 x (16 ... 10), 1 x (16 ... 8)

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
---------------------------------	------------	----------------------------------



[Confirmation](#)



Test Certificates **Marine / Shipping**

[Type Test Certificates/Test Report](#)



Marine / Shipping **other**



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6812-8AB>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6812-8AB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6812-8AB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6812-8AB&lang=en

last modified:


12/15/2020

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 3RA68128AB on WIN SOURCE](#)
-  [Siemens Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management