




THE DATASHEET OF
55/1114-24-9-9



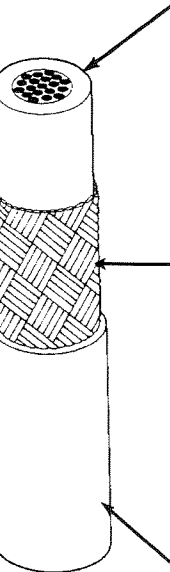

CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (Inch)		OUTSIDE DIAMETER (Inch)		MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/1114-30-*	30	38	.006	.008	.057	.062	3.4
55/1114-28-*	28	38	.006	.008	.060	.065	3.9
55/1114-26-*	26	38	.006	.008	.065	.070	4.7
55/1114-24-*	24	38	.006	.008	.070	.075	5.7
55/1114-22-*	22	38	.006	.008	.076	.081	7.0
55/1114-20-*	20	38	.006	.008	.083	.089	9.0

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
VOLTAGE RATING: 600 volts (rms) at sea level
CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
JACKET COLOR: White preferred
JACKET ELONGATION: 50% (minimum)
JACKET FLAWS:
 Spark Test, 1000 volts (rms)
 Impulse Dielectric Test, 6.0 kV (peak)
RADIATION RESISTANCE: 500 megarads
SHIELD COVERAGE: 85% (minimum)

VACUUM STABILITY:
 Total Mass Loss (TML), 1.0% (maximum)
 Volatile Condensable Material, 0.1% (maximum)
VOLTAGE WITHSTAND TEST (Post Environmental):
 1500 volts (rms), 60 Hz, 1 minute
PART NUMBER:
 The "*" in the part numbers above shall be replaced
 by a color code designator with a dash separating
 the component wire color from the jacket color.
 1/ Example: AWG 24, white component wire; white jacket:
 55/1114-24-9-9


NOTE: Nominal values are for information only.
 Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.
 1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901902," MAY BE REPLACED BY "AWXX") OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 55/1114-24-9-9 on WIN SOURCE](#)

 [TE Connectivity](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management