




1. TRUE POSITION TOLERANCE OF POST TIPS APPLIES WHEN HEADERS ARE HELD FLAT AGAINST POINTED CIRCUIT BOARD.

2. OBSOLETE PART NUMBER

3. .000100-.000200 BRIGHT TIN OVER .000050-.000100 NICKEL.

4. .000100-.000200 BRIGHT TIN-LEAD OVER .000050-.000100 NICKEL.

5. PRELIMINARY PART

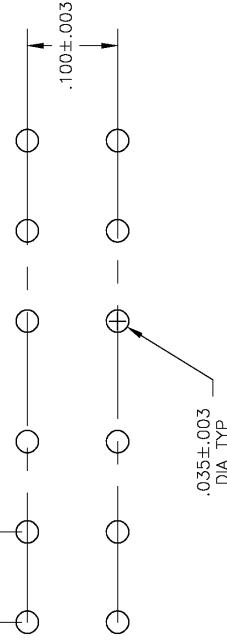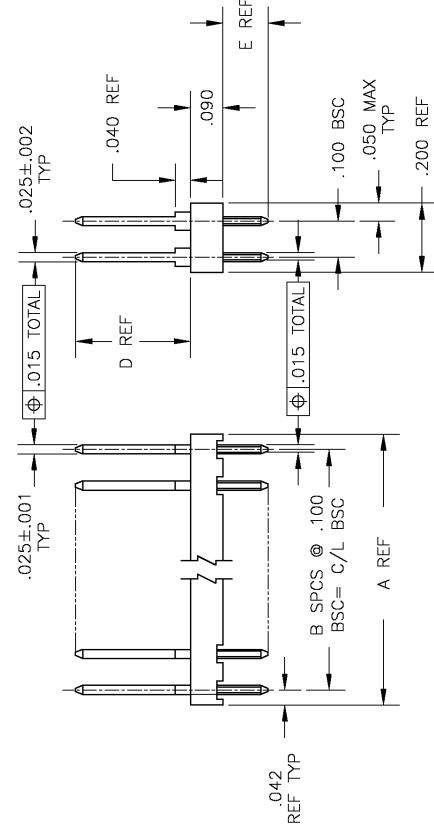

RECOMMENDED HOLE LAYOUT

3	.125	.318	.500
4	.125	.318	4.100
	.125	.318	4.000
	.125	.318	3.900
	.125	.318	3.800
	.125	.318	3.700
	.125	.318	3.600
	.125	.318	3.500
	.125	.318	3.400
	.125	.318	3.300
	.125	.318	3.200
	.125	.318	3.100
	.125	.318	3.000
	.125	.318	2.900
	.125	.318	2.800
	.125	.318	2.700
	.125	.318	2.600
	.125	.318	2.500
	.125	.318	2.400
	.125	.318	2.300
	.125	.318	2.200
	.125	.318	2.100
	.125	.318	2.000
	.125	.318	1.900
	.125	.318	1.800
	.125	.318	1.700
	.125	.318	1.600
	.125	.318	1.500
	.125	.318	1.400
	.125	.318	1.300
	.125	.318	1.200
	.125	.318	1.100
	.125	.318	1.000
	.125	.318	.900
	.125	.318	.800
	.125	.318	.700
	.125	.318	.600
	.125	.318	.500
	.125	.318	.400
	.125	.318	.300
	.125	.318	.200
	.125	.318	.100
	.125	.318	-
4			
FINISH	E	D	C

SUPERCEDED BY 3-103322-5

SUPERCEDED BY 3-103322-2

SUPERCEDED BY 3-103322-0

SUPERCEDED BY 2-103322-5

SUPERCEDED BY 2-103322-1

SUPERCEDED BY 1-103322-6

SUPERCEDED BY 1-103322-2

SUPERCEDED BY 103322-9

SUPERCEDED BY 103322-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN:	M.E.PASTEL
DESIGNED BY:	J.C. CLARK
APPROVED BY:	J.C. CLARK
DATE:	PRODUCT DATE
TOLERANCE UNLESS OTHERWISE SPECIFIED:	
D	PIC ±
F	PIC ±
H	PIC ±
K	PIC ±
M	PIC ±
ANGLES	±
FINISHES	±
WEIGHT	±
MATERIAL:	SEE TABLE
HSS-CLASS FILING NICKEL	
COPPER-CLASS BRONZE	
CUSTOMER DRAWING	

APPLICATION SPEC	
WEIGHT	
CUSTOMER DRAWING	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 5-87543-6 on WIN SOURCE](#)

 [TE Connectivity](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management