



**THE DATASHEET OF
742X083101JP**





74x Series Chip Resistor Arrays

Features

- AEC-Q200 Compliant [See Ordering Information]
- Low Cost Thick Film Technology
- Leadless Surface Mount Construction
- Concave or Convex Terminations
- Solder Coated Nickel Barrier Pads
- Isolated and Bussed Circuit Configurations
- Improved TCR Tracking vs. Discrete Resistors
- Fewer Placements Than Discrete Components
- Tape and Reel Packaging



RoHS Compliant in Accordance with EU Directive 2011/65/EU and 2015/863

- Lead-Free Termination Finish
- Exemption 7(c)-I, Electrical and electronic components containing lead [Pb] in glass

Applications

- Data Communications
- Image Processing
- Medical Equipment
- Networking
- Pull-Up/Pull-Down Logic Gates
- DDR SDRAM, MDDR, DRAM
- Portable Test Equipment
- Low Profile High Density Designs

Description

74x Series Chip Arrays are single packaged devices containing an array of homogeneous resistor elements. Arrays are typically used for convenience when several resistors occupy the same area in a layout. Multiple package sizes and circuit configurations help save placement costs by reducing application component count.

Ordering Information

| Model | | | Resistor Value | Resistor Tolerance | RoHS Compliant |
|--------------------|--------------------|--------------------|----------------|--------------------|--------------------|
| 741X083 | | | 103 | J | P |
| Package Code | Package Code | Package Code | | Code | Termination |
| 740X043 [AEC-Q200] | 742C043 [AEC-Q200] | 745X102 [AEC-Q200] | | J | ±5% ¹ |
| 741X043 [AEC-Q200] | 742X083 [AEC-Q200] | 742C163 | | F | ±1% ^{2,3} |
| 741X083 [AEC-Q200] | 742C083 [AEC-Q200] | 745C101 | | X | Zero Ohm |
| 741C083 [AEC-Q200] | 744X083 [AEC-Q200] | 745C102 | | | |
| 741X163 [AEC-Q200] | 745X101 [AEC-Q200] | 746X101 | | | |
| | | | Code | Resistor Value * | |
| | | | 103 | 10k ohm | |
| | | | | | Code |
| | | | | | P |

* See Addendum for Standard EIA Values and Codes

Notes:

- Standard tolerance is ±5% and available for 740 thru 746 package codes; 3-digit resistor codes.
- Optional tolerance at ±1% is available for 741 thru 744 package codes, 4-digit resistor codes; except 742C043 and 742C163 [±5% only].
- Consult factory for availability with 740X043 package code.

**Not all performance combinations and resistor values may be available.
Contact your local CTS Representative or CTS Customer Service for availability.**

This product is specified for use only in standard commercial applications. Supplier disclaims all express and implied warranties and liability in connection with any use of this product in any non-commercial applications or in any application that may expose the product to conditions that are outside of the tolerances provided in its specification.

Ordering Information

Part Number Examples

| Tolerance / Value | 3-Digit Code J [±5%] | 4-Digit Code F [±1%] |
|-------------------|----------------------------|----------------------------|
| 10 Ohms | 742C083100JP | 742C08310R0FP |
| 49.9 Ohms | Not Available | 742C08349R9FP |
| 120 Ohms | 742C083121JP | 742C0831200FP |
| 1k Ohms | 742C083102JP | 742C0831001FP |
| 68k Ohms | 742C083683JP | 742C0836802FP |

3-Digit Resistor Code [±5% tolerance only.]

1st and 2nd digits are resistor, 3rd digit is number of zeros.

Ex. 102 = 1,000 ohm = 1k ohm

Ex. 683 = 68,000 ohm = 68k ohm

4-Digit Resistor Code [±1% tolerance only.]

First three digits are resistor value, 4th digit is number of zeros.

Ex. 1001 = 1,000 ohm = 1k ohm

Ex. 6802 = 68,000 ohm = 68k ohm

Resistance Values <100 Ohms

“R” indicates decimal for values less than 100 ohm.

Ex. 49R9 = 49.9 ohm

Electrical & Environmental Specifications

Operating Conditions

| Package | PCB Area Per Resistor [Sq. Inch] | Circuit Type | Resistance Range [ohm] | Resistance Tolerance [%] ¹ | Operating Temperature Range | Temperature Coefficient | +70°C Power Per Resistor ² [Watts] | Maximum Operating Voltage |
|---------|----------------------------------|--------------|------------------------|---------------------------------------|-----------------------------|-------------------------|---|---------------------------|
| 740 | 0.0008 | Isolated | 10 - 1M | ±5% Std. or | -55°C to +125°C | ±200ppm/°C | 0.031 | 12.5V |
| 741 | 0.0015 | Isolated | 10 - 1M | | | | 0.063 | 25V |
| 742 | 0.0037 | Isolated | 10 - 1M | 0.5 ohm [whichever is greater] | -55°C to +125°C | ±200ppm/°C | 0.063 | 50V |
| 744 | 0.0094 | Isolated | 10 - 1M | | | | 0.125 | 200V |
| 745X | 0.0058 | Bussed | 10 - 330k | | | | 0.063 | 50V |
| 745C | 0.0058 | Bussed | 10 - 1M | | | ±250ppm/°C | 0.063 | 50V |
| 746 | 0.0013 | Bussed | 10 - 100k | | | ±200ppm/°C | 0.063 | 25V |

1. See Ordering Information for other options available.

2. Total Rated Package Power equals total number of resistors times rated Power Per Resistor.

Operating Conditions – 0 ohm


| Package | PCB Area Per Resistor [Sq. Inch] | Circuit Type | Resistance Range [ohm] | Current @ +70°C Max Per Element [A] | Surge Current Max <1 second [A] | Max Resistance [milliohm] |
|---------|----------------------------------|--------------|------------------------|-------------------------------------|---------------------------------|---------------------------|
| 740 | 0.0008 | Isolated | | | | |
| 741 | 0.0015 | Isolated | | | | |
| 742 | 0.0037 | Isolated | 0.0 | 1.0 | 2.0 | 50 |
| 744 | 0.0094 | Isolated | | | | |

1. Not available with 745, and 746 package codes.

Electrical & Environmental Specifications

Power Derating Curve – Typical

With the rated ambient temperature set to +70°C, the maximum power [maximum current for 0Ω product] at a temperature of no more than rated ambient temperature shall be equal to the rated power [rate current for 0Ω product]. The maximum power at a temperature exceeding the rated ambient temperature shall be a value determined by reducing the rated power according to the power reduction curve in the figure below.

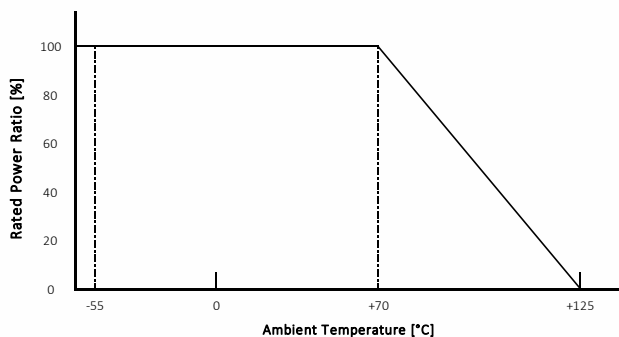

Rated Voltage

The rated voltage shall be the DC or AC [effective power frequency] voltage corresponding to the rated power and shall be determined with the formula shown below. If the determined rated voltage exceeds the maximum operating voltage specified in Operating Conditions table, the maximum operating voltage shall be the rated voltage.

$$E = \sqrt{P \times R}$$

E = Rated Voltage [V]

P = Rated Power [W]

R = Nominal Resistance [Ω]

Environmental Parameters

| Test | Maximum Delta R [%] | | | Test Description |
|---------------------------|---------------------|------|-----------|--|
| | 740 | 741 | 742 - 746 | |
| Thermal Cycle | 1.00 | 1.00 | 1.00 | 5 cycles -55°C to +125°C |
| Short Time Overload | 2.00 | 2.50 | 1.00 | 2½ times rated working voltage for 5 seconds |
| Moisture Resistance | 2.00 | 5.00 | 2.00 | 240 hours @ 0.1 rated load; -10°C to +65°C, 90% RH |
| High Temperature Exposure | 3.00 | 1.00 | 1.00 | 1,000 hours @ +125°C, no load |
| Load Life | 3.00 | 5.00 | 2.00 | 1,000 hours @ +70°C, rated load |
| Resistance to Solder Heat | 1.00 | 2.50 | 1.00 | 10 seconds @ +260°C solder |
| Resistance to Solvents | --- | --- | --- | Isopropyl alcohol, Freon TMC |
| Solderability | --- | --- | --- | RMA Flux, +230°C, 5 seconds dip, 95% coverage |


Electrical & Environmental Specifications

Circuit Types [Schematics]


| | | | |
|---|---|---|---|
| <p>740X043</p> <p>2 Resistors 4 Terminations</p> <p>$R_1 = R_2$</p> | <p>741X043</p> <p>2 Resistors 4 Terminations</p> <p>$R_1 = R_2$</p> | <p>742C043</p> <p>2 Resistors 4 Terminations</p> <p>$R_1 = R_2$</p> | |
| <p>741X083</p> <p>4 Resistors 8 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4$</p> | <p>741C083</p> <p>4 Resistors 8 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4$</p> | <p>742X083</p> <p>4 Resistors 8 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4$</p> | <p>742C083</p> <p>4 Resistors 8 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4$</p> |
| <p>741X163</p> <p>8 Resistors 16 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> | <p>742C163</p> <p>8 Resistors 16 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> | <p>744X083</p> <p>4 Resistors 8 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4$</p> | <p>746X101</p> <p>8 Resistors 10 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> |
| <p>745X101</p> <p>8 Resistors 10 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> | <p>745X102</p> <p>8 Resistors 10 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> | <p>745C101</p> <p>8 Resistors 10 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> | <p>745C102</p> <p>8 Resistors 10 Terminations</p> <p>$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$</p> |

Mechanical Specifications

Package Drawing – Convex, Type X

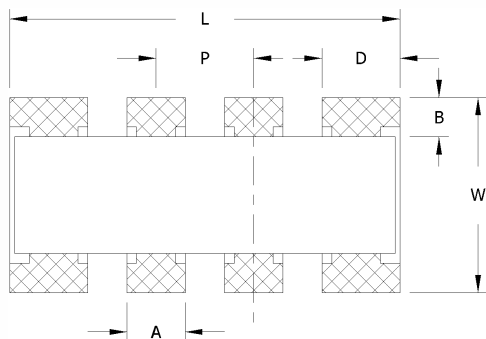

Package Drawing – Concave, Type C

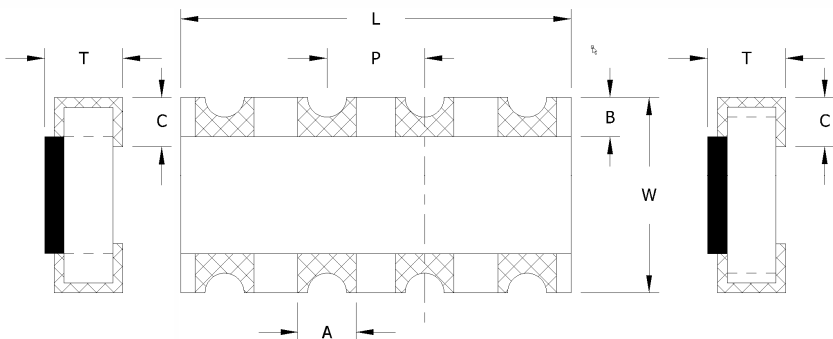

Notes

1. JEDEC termination code (e3). Barrier-plating is nickel [Ni] with Matte tin [Sn] finish.
2. Reflow conditions per JEDEC J-STD-020; +260°C maximum, 20 seconds.
3. MSL = 1.


Package Configuration/Dimensions

| Package Code | Resistor Size/ Configuration | Termination Pads | # Resistors | Circuit Type | Dimensions [mm] | | | | | | | |
|--------------|------------------------------|------------------|-------------|--------------|-----------------|------------|----------|--------------|------------|--------------|--------------|--------------|
| | | | | | L | W | P [Typ.] | T | A | B | C | D |
| 740X043 | 0201 X 2 | 4 | 2 | Isolated | 0.80 ±0.10 | 0.60 ±0.10 | 0.50 | 0.35 ±0.10 | N/A | 0.175 ±0.125 | 0.15 ±0.10 | 0.35 ±0.10 |
| 741X043 | 0402 X 2 | 4 | 2 | Isolated | 1.00 ±0.20 | 1.00 ±0.20 | 0.65 | 0.35 ±0.10 | N/A | 0.20 ±0.15 | 0.25 ±0.10 | 0.33 ±0.15 |
| 741X083 | 0402 X 4 | 8 | 4 | Isolated | 2.00 ±0.20 | 1.00 ±0.20 | 0.50 | 0.40 ±0.15 | 0.30 ±0.15 | 0.20 ±0.15 | 0.25 ±0.20 | 0.40 ±0.15 |
| 741C083 | 0402 X 4 | 8 | 4 | Isolated | 2.00 ±0.20 | 1.00 ±0.20 | 0.50 | 0.375 ±0.125 | 0.29 ±0.11 | 0.20 ±0.10 | 0.265 ±0.115 | N/A |
| 741X163 | 0602 X 8 | 16 | 8 | Isolated | 3.95 ±0.25 | 1.60 ±0.15 | 0.50 | 0.45 ±0.10 | 0.30 ±0.10 | 0.30 ±0.15 | 0.375 ±0.175 | 0.325 ±0.175 |
| 742C043 | 0603 X 2 | 4 | 2 | Isolated | 1.60 ±0.20 | 1.60 ±0.20 | 0.80 | 0.525 ±0.175 | 0.50 ±0.15 | 0.30 ±0.20 | 0.40 ±0.15 | N/A |
| 742X083 | 0603 X 4 | 8 | 4 | Isolated | 3.20 ±0.15 | 1.60 ±0.15 | 0.80 | 0.55 ±0.15 | 0.45 ±0.20 | 0.30 ±0.20 | 0.275 ±0.175 | 0.525 ±0.225 |
| 742C083 | 0603 X 4 | 8 | 4 | Isolated | 3.20 ±0.20 | 1.60 ±0.20 | 0.80 | 0.525 ±0.175 | 0.50 ±0.15 | 0.30 ±0.20 | 0.35 ±0.20 | N/A |
| 742C163 | 0603 X 8 | 16 | 8 | Isolated | 6.40 ±0.20 | 1.60 ±0.20 | 0.80 | 0.525 ±0.175 | 0.50 ±0.15 | 0.30 ±0.20 | 0.40 ±0.15 | N/A |
| 744X083 | 1206 X 4 | 8 | 4 | Isolated | 5.80 ±0.20 | 3.20 ±0.20 | 1.27 | 0.60 ±0.175 | 0.90 ±0.15 | 0.50 ±0.20 | 0.50 ±0.15 | 1.10 ±0.15 |
| 745C101 | --- | 10 | 8 | Bussed | 6.40 ±0.20 | 3.10 ±0.20 | 1.27 | 0.575 ±0.125 | 0.60 ±0.15 | 0.50 ±0.30 | 0.55 ±0.30 | N/A |
| 745C102 | --- | 10 | 8 | Bussed | 6.40 ±0.20 | 3.10 ±0.20 | 1.27 | 0.575 ±0.125 | 0.60 ±0.15 | 0.50 ±0.30 | 0.55 ±0.30 | N/A |
| 745X101 | --- | 10 | 8 | Bussed | 6.40 ±0.20 | 3.20 ±0.20 | 1.27 | 0.60 ±0.10 | 0.95 ±0.20 | 0.50 ±0.15 | 0.50 ±0.15 | 1.10 ±0.15 |
| 745X102 | --- | 10 | 8 | Bussed | 6.40 ±0.20 | 3.20 ±0.20 | 1.27 | 0.60 ±0.10 | 0.95 ±0.20 | 0.50 ±0.15 | 0.50 ±0.15 | 1.10 ±0.15 |
| 746X101 | --- | 10 | 8 | Bussed | 3.20 ±0.20 | 1.60 ±0.15 | 0.64 | 0.60 ±0.10 | 0.35 ±0.05 | 0.30 ±0.15 | 0.35 ±0.15 | 0.45 ±0.05 |

Mechanical Specifications

Recommended Pad Layout

| Package Code | Dimensions [mm] | | | |
|--------------|-----------------|------|------|------|
| | A | B | C | D |
| 740 | 0.90 | 0.30 | 0.30 | 0.50 |
| 741X043 | 1.80 | 0.50 | 0.30 | 0.67 |
| 741X083 | 1.80 | 0.50 | 0.30 | 0.50 |
| 741C083 | 1.80 | 0.50 | 0.30 | 0.50 |
| 741X163 | 1.80 | 0.50 | 0.30 | 0.50 |
| 742 | 2.60 | 0.80 | 0.45 | 0.80 |
| 744 | 3.90 | 2.20 | 0.71 | 1.27 |
| 745 | 3.90 | 1.60 | 0.90 | 1.27 |
| 746 | 2.60 | 0.80 | 0.35 | 0.64 |

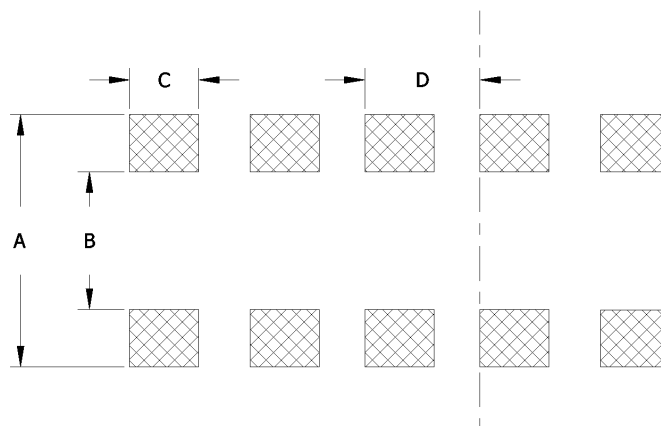


Marking Information


| Package Code | J | F | | Marking Color ¹ |
|----------------------|----------------------|----------------------|----------------------|----------------------------|
| | Tolerance E-24 Value | Tolerance E-24 Value | Tolerance E-96 Value | |
| 740X043 | No Marking | - | - | - |
| 741X043 | No Marking | No Marking | No Marking | - |
| 741X083 | No Marking | No Marking | No Marking | - |
| | or 3-Digits | or 4-Digits | or 4-Digits | |
| 741C083 | No Marking | No Marking | No Marking | - |
| | or 3-Digits | or 3-Digits | | |
| 741X163 | 3-Digits | 4-Digits | 4-Digits | - |
| 742C043 ² | 3-Digits | 3-Digits | 4-Digits | White |
| | | or 4-Digits | | |
| 742X083 | 3-Digits | 3-Digits | 4-Digits | White |
| | | or 4-Digits | | |
| 742C083 | 3-Digits | 3-Digits | 4-Digits | White |
| | | or 4-Digits | | |
| 742C163 | 3-Digits | 4-Digits | 4-Digits | White |
| 744X083 | 3-Digits | 4-Digits | 4-Digits | White |
| 745C101 | 3-Digits | - | - | White |
| 745C102 | 3-Digits | - | - | Orange |
| 745X101 | 3-Digits | - | - | - |
| 745X102 | 3-Digits | - | - | - |
| 746X101 | 3-Digits | - | - | - |

1. May vary from indicated color.
2. Zero Ohm jumper may not have marking present.
3. Color of protective coating over resistors may vary.

10k ohm – 3-Digit

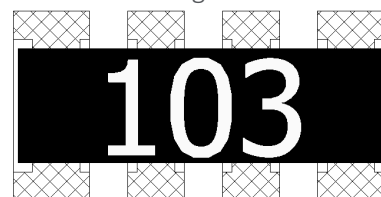

10k ohm – 4-Digit

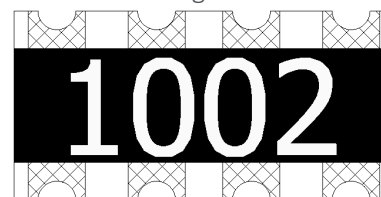



Packaging

Tape and Reel Information

| REEL DIAMETER 7" | 740X043 | 741X043 741C083 741X083 | 742C043 742C083 742X083 | 741X163 | 744X083 742C163 | 745C101 745C102 | 745X101 745X102 | 746X101 |
|-----------------------|---------|-------------------------------|-------------------------------|---------|--------------------|--------------------|--------------------|---------|
| Parts Per Reel | 10,000 | 10,000 | 5,000 | 5,000 | 4,000 | 4,000 | 4,000 | 5,000 |
| Pitch | 2mm | 2mm | 4mm | 4mm | 4mm | 4mm | 4mm | 4mm |
| Carrier Width | 8mm | 8mm | 8mm | 12mm | 12mm | 12mm | 12mm | 8mm |
| Material | Paper | Paper | Paper | Paper | Plastic | Plastic | Plastic | Paper |



Addendum

Standard EIA Codes and Resistor Values – E-24 [3-Digit Resistor Code for J Tolerances]

| CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS |
|--------|------|------|------|------|------|------|-------|------|-------|------|------|
| 000X * | 0 | 680 | 68 | 511 | 510 | 392 | 3.9k | 303 | 30.0k | 224 | 220k |
| 100 | 10 | 750 | 75 | 561 | 560 | 432 | 4.3k | 333 | 33.0k | 244 | 240k |
| 110 | 11 | 820 | 82 | 621 | 620 | 472 | 4.7k | 363 | 36.0k | 274 | 270k |
| 120 | 12 | 910 | 91 | 681 | 680 | 512 | 5.1k | 393 | 39.0k | 304 | 300k |
| 130 | 13 | 101 | 100 | 751 | 750 | 562 | 5.6k | 433 | 43.0k | 334 | 330k |
| 150 | 15 | 111 | 110 | 821 | 820 | 622 | 6.2k | 473 | 47.0k | 364 | 360k |
| 160 | 16 | 121 | 120 | 911 | 910 | 682 | 6.8k | 513 | 51.0k | 394 | 390k |
| 180 | 18 | 131 | 130 | 102 | 1.0k | 752 | 7.5k | 563 | 56.0k | 434 | 430k |
| 200 | 20 | 151 | 150 | 112 | 1.1k | 822 | 8.2k | 623 | 62.0k | 474 | 470k |
| 220 | 22 | 161 | 160 | 122 | 1.2k | 912 | 9.1k | 683 | 68.0k | 514 | 510k |
| 240 | 24 | 181 | 180 | 132 | 1.3k | 103 | 10.0k | 753 | 75.0k | 564 | 560k |
| 270 | 27 | 201 | 200 | 152 | 1.5k | 113 | 11.0k | 823 | 82.0k | 624 | 620k |
| 300 | 30 | 221 | 220 | 162 | 1.6k | 123 | 12.0k | 913 | 91.0k | 684 | 680k |
| 330 | 33 | 241 | 240 | 182 | 1.8k | 133 | 13.0k | 104 | 100k | 754 | 750k |
| 360 | 36 | 271 | 270 | 202 | 2.0k | 153 | 15.0k | 114 | 110k | 824 | 820k |
| 390 | 39 | 301 | 300 | 222 | 2.2k | 163 | 16.0k | 124 | 120k | 914 | 910k |
| 430 | 43 | 331 | 330 | 242 | 2.4k | 183 | 18.0k | 134 | 130k | 105 | 1M |
| 470 | 47 | 361 | 360 | 272 | 2.7k | 203 | 20.0k | 154 | 150k | | |
| 510 | 51 | 391 | 390 | 302 | 3.0k | 223 | 22.0k | 164 | 160k | | |
| 560 | 56 | 431 | 430 | 332 | 3.3k | 243 | 24.0k | 184 | 180k | | |
| 620 | 62 | 471 | 470 | 362 | 3.6k | 273 | 27.0k | 204 | 200k | | |

* Includes tolerance code "X".



Addendum

Standard EIA Codes and Resistor Values – E-24 [4-Digit Resistor Code for F Tolerance]

| CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS |
|--------|------|------|------|------|------|------|-------|------|-------|------|------|
| 000X * | 0 | 68R0 | 68 | 5100 | 510 | 3901 | 3.9k | 3002 | 30.0k | 2203 | 220k |
| 10R0 | 10 | 75R0 | 75 | 5600 | 560 | 4301 | 4.3k | 3302 | 33.0k | 2403 | 240k |
| 11R0 | 11 | 82R0 | 82 | 6200 | 620 | 4701 | 4.7k | 3602 | 36.0k | 2703 | 270k |
| 12R0 | 12 | 91R0 | 91 | 6800 | 680 | 5101 | 5.1k | 3902 | 39.0k | 3003 | 300k |
| 13R0 | 13 | 1000 | 100 | 7500 | 750 | 5601 | 5.6k | 4302 | 43.0k | 3303 | 330k |
| 15R0 | 15 | 1100 | 110 | 8200 | 820 | 6201 | 6.2k | 4702 | 47.0k | 3603 | 360k |
| 16R0 | 16 | 1200 | 120 | 9100 | 910 | 6801 | 6.8k | 5102 | 51.0k | 3903 | 390k |
| 18R0 | 18 | 1300 | 130 | 1001 | 1.0k | 7501 | 7.5k | 5602 | 56.0k | 4303 | 430k |
| 20R0 | 20 | 1500 | 150 | 1101 | 1.1k | 8201 | 8.2k | 6202 | 62.0k | 4703 | 470k |
| 22R0 | 22 | 1600 | 160 | 1201 | 1.2k | 9101 | 9.1k | 6802 | 68.0k | 5103 | 510k |
| 24R0 | 24 | 1800 | 180 | 1301 | 1.3k | 1002 | 10.0k | 7502 | 75.0k | 5603 | 560k |
| 27R0 | 27 | 2000 | 200 | 1501 | 1.5k | 1102 | 11.0k | 8202 | 82.0k | 6203 | 620k |
| 30R0 | 30 | 2200 | 220 | 1601 | 1.6k | 1202 | 12.0k | 9102 | 91.0k | 6803 | 680k |
| 33R0 | 33 | 2400 | 240 | 1801 | 1.8k | 1302 | 13.0k | 1003 | 100k | 7503 | 750k |
| 36R0 | 36 | 2700 | 270 | 2001 | 2.0k | 1502 | 15.0k | 1103 | 110k | 8203 | 820k |
| 39R0 | 39 | 3000 | 300 | 2201 | 2.2k | 1602 | 16.0k | 1203 | 120k | 9103 | 910k |
| 43R0 | 43 | 3300 | 330 | 2401 | 2.4k | 1802 | 18.0k | 1303 | 130k | 1004 | 1M |
| 47R0 | 47 | 3600 | 360 | 2701 | 2.7k | 2002 | 20.0k | 1503 | 150k | | |
| 51R0 | 51 | 3900 | 390 | 3001 | 3.0k | 2202 | 22.0k | 1603 | 160k | | |
| 56R0 | 56 | 4300 | 430 | 3301 | 3.3k | 2402 | 24.0k | 1803 | 180k | | |
| 62R0 | 62 | 4700 | 470 | 3601 | 3.6k | 2702 | 27.0k | 2003 | 200k | | |

* Includes tolerance code "X".



Addendum

Standard EIA Codes and Resistor Values – E-96¹ [4-Digit Resistor Code for F Tolerance]

| CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS |
|--------|------|------|------|------|------|------|------|------|-------|------|-------|
| 000X * | 0 | 26R1 | 26.1 | 69R8 | 69.8 | 1870 | 187 | 4990 | 499 | 1331 | 1.33k |
| 10R0 | 10.0 | 26R7 | 26.7 | 71R5 | 71.5 | 1910 | 191 | 5110 | 511 | 1371 | 1.37k |
| 10R2 | 10.2 | 27R4 | 27.4 | 73R2 | 73.2 | 1960 | 196 | 5230 | 523 | 1401 | 1.40k |
| 10R5 | 10.5 | 28R0 | 28.0 | 75R0 | 75.0 | 2000 | 200 | 5360 | 536 | 1431 | 1.43k |
| 10R7 | 10.7 | 28R7 | 28.7 | 76R8 | 76.8 | 2050 | 205 | 5490 | 549 | 1471 | 1.47k |
| 11R0 | 11.0 | 29R4 | 29.4 | 78R7 | 78.7 | 2100 | 210 | 5620 | 562 | 1501 | 1.50k |
| 11R3 | 11.3 | 30R1 | 30.1 | 80R6 | 80.6 | 2150 | 215 | 5760 | 576 | 1541 | 1.54k |
| 11R5 | 11.5 | 30R9 | 30.9 | 82R5 | 82.5 | 2210 | 221 | 5900 | 590 | 1581 | 1.58k |
| 11R8 | 11.8 | 31R6 | 31.6 | 84R5 | 84.5 | 2260 | 226 | 6040 | 604 | 1621 | 1.62k |
| 12R1 | 12.1 | 32R4 | 32.4 | 86R6 | 86.6 | 2320 | 232 | 6190 | 619 | 1651 | 1.65k |
| 12R4 | 12.4 | 33R2 | 33.2 | 88R7 | 88.7 | 2370 | 237 | 6340 | 634 | 1691 | 1.69k |
| 12R7 | 12.7 | 34R0 | 34.0 | 90R9 | 90.9 | 2430 | 243 | 6490 | 649 | 1741 | 1.74k |
| 13R0 | 13.0 | 34R8 | 34.8 | 93R1 | 93.1 | 2490 | 249 | 6650 | 665 | 1781 | 1.78k |
| 13R3 | 13.3 | 35R7 | 35.7 | 95R3 | 95.3 | 2550 | 255 | 6810 | 681 | 1821 | 1.82k |
| 13R7 | 13.7 | 36R5 | 36.5 | 97R6 | 97.6 | 2610 | 261 | 6980 | 698 | 1871 | 1.87k |
| 14R0 | 14.0 | 37R4 | 37.4 | 1000 | 100 | 2670 | 267 | 7150 | 715 | 1911 | 1.91k |
| 14R3 | 14.3 | 38R3 | 38.3 | 1020 | 102 | 2740 | 274 | 7320 | 732 | 1961 | 1.96k |
| 14R7 | 14.7 | 39R2 | 39.2 | 1050 | 105 | 2800 | 280 | 7500 | 750 | 2001 | 2.00k |
| 15R0 | 15.0 | 40R2 | 40.2 | 1070 | 107 | 2870 | 287 | 7680 | 768 | 2051 | 2.05k |
| 15R4 | 15.4 | 41R2 | 41.2 | 1100 | 110 | 2940 | 294 | 7870 | 787 | 2101 | 2.10k |
| 15R8 | 15.8 | 42R2 | 42.2 | 1130 | 113 | 3010 | 301 | 8060 | 806 | 2151 | 2.15k |
| 16R2 | 16.2 | 43R2 | 43.2 | 1150 | 115 | 3090 | 309 | 8250 | 825 | 2211 | 2.21k |
| 16R5 | 16.5 | 44R2 | 44.2 | 1180 | 118 | 3160 | 316 | 8450 | 845 | 2261 | 2.26k |
| 16R9 | 16.9 | 45R3 | 45.3 | 1210 | 121 | 3240 | 324 | 8660 | 866 | 2321 | 2.32k |
| 17R4 | 17.4 | 46R4 | 46.4 | 1240 | 124 | 3320 | 332 | 8870 | 887 | 2371 | 2.37k |
| 17R8 | 17.8 | 47R5 | 47.5 | 1270 | 127 | 3400 | 340 | 9090 | 909 | 2431 | 2.43k |
| 18R2 | 18.2 | 48R7 | 48.7 | 1300 | 130 | 3480 | 348 | 9310 | 931 | 2491 | 2.49k |
| 18R7 | 18.7 | 49R9 | 49.9 | 1330 | 133 | 3570 | 357 | 9530 | 953 | 2551 | 2.55k |
| 19R1 | 19.1 | 51R1 | 51.1 | 1370 | 137 | 3650 | 365 | 9760 | 976 | 2611 | 2.61k |
| 19R6 | 19.6 | 52R3 | 52.3 | 1400 | 140 | 3740 | 374 | 1001 | 1.00k | 2671 | 2.67k |
| 20R0 | 20.0 | 53R6 | 53.6 | 1430 | 143 | 3830 | 383 | 1021 | 1.02k | 2741 | 2.74k |
| 20R5 | 20.5 | 54R9 | 54.9 | 1470 | 147 | 3920 | 392 | 1051 | 1.05k | 2801 | 2.80k |
| 21R0 | 21.0 | 56R2 | 56.2 | 1500 | 150 | 4020 | 402 | 1071 | 1.07k | 2871 | 2.87k |
| 21R5 | 21.5 | 57R6 | 57.6 | 1540 | 154 | 4120 | 412 | 1101 | 1.10k | 2941 | 2.94k |
| 22R1 | 22.1 | 59R0 | 59.0 | 1580 | 158 | 4220 | 422 | 1131 | 1.13k | 3011 | 3.01k |
| 22R6 | 22.6 | 60R4 | 60.4 | 1620 | 162 | 4320 | 432 | 1151 | 1.15k | 3091 | 3.09k |
| 23R2 | 23.2 | 61R9 | 61.9 | 1650 | 165 | 4420 | 442 | 1181 | 1.18k | 3161 | 3.16k |
| 23R7 | 23.7 | 63R4 | 63.4 | 1690 | 169 | 4530 | 453 | 1211 | 1.21k | 3241 | 3.24k |
| 24R3 | 24.3 | 64R9 | 64.9 | 1740 | 174 | 4640 | 464 | 1241 | 1.24k | 3321 | 3.32k |
| 24R9 | 24.9 | 66R5 | 66.5 | 1780 | 178 | 4750 | 475 | 1271 | 1.27k | 3401 | 3.40k |
| 25R5 | 25.5 | 68R1 | 68.1 | 1820 | 182 | 4870 | 487 | 1301 | 1.30k | 3481 | 3.48k |

1. Not all resistor values may be available. Please contact factory.

* Includes tolerance code "X".



Addendum



Standard EIA Codes and Resistor Values – E-96 ¹ [4-Digit Resistor Code for F Tolerance]

| CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS | CODE | OHMS |
|------|-------|------|-------|------|-------|------|-------|------|------|------|------|
| 3571 | 3.57k | 9311 | 9.31k | 2432 | 24.3k | 6342 | 63.4k | 1653 | 165k | 4323 | 432k |
| 3651 | 3.65k | 9531 | 9.53k | 2492 | 24.9k | 6492 | 64.9k | 1693 | 169k | 4423 | 442k |
| 3741 | 3.74k | 9761 | 9.76k | 2552 | 25.5k | 6652 | 66.5k | 1743 | 174k | 4533 | 453k |
| 3831 | 3.83k | 1002 | 10.0k | 2612 | 26.1k | 6812 | 68.1k | 1783 | 178k | 4643 | 464k |
| 3921 | 3.92k | 1022 | 10.2k | 2672 | 26.7k | 6982 | 69.8k | 1823 | 182k | 4753 | 475k |
| 4021 | 4.02k | 1052 | 10.5k | 2742 | 27.4k | 7152 | 71.5k | 1873 | 187k | 4873 | 487k |
| 4121 | 4.12k | 1072 | 10.7k | 2802 | 28.0k | 7322 | 73.2k | 1913 | 191k | 4993 | 499k |
| 4221 | 4.22k | 1102 | 11.0k | 2872 | 28.7k | 7502 | 75.0k | 1963 | 196k | 5113 | 511k |
| 4321 | 4.32k | 1132 | 11.3k | 2942 | 29.4k | 7682 | 76.8k | 2003 | 200k | 5233 | 523k |
| 4421 | 4.42k | 1152 | 11.5k | 3012 | 30.1k | 7872 | 78.7k | 2053 | 205k | 5363 | 536k |
| 4531 | 4.53k | 1182 | 11.8k | 3092 | 30.9k | 8062 | 80.6k | 2103 | 210k | 5493 | 549k |
| 4641 | 4.64k | 1212 | 12.1k | 3162 | 31.6k | 8252 | 82.5k | 2153 | 215k | 5623 | 562k |
| 4751 | 4.75k | 1242 | 12.4k | 3242 | 32.4k | 8452 | 84.5k | 2213 | 221k | 5763 | 576k |
| 4871 | 4.87k | 1272 | 12.7k | 3322 | 33.2k | 8662 | 86.6k | 2263 | 226k | 5903 | 590k |
| 4991 | 4.99k | 1302 | 13.0k | 3402 | 34.0k | 8872 | 88.7k | 2323 | 232k | 6043 | 604k |
| 5111 | 5.11k | 1332 | 13.3k | 3482 | 34.8k | 9092 | 90.9k | 2373 | 237k | 6193 | 619k |
| 5231 | 5.23k | 1372 | 13.7k | 3572 | 35.7k | 9312 | 93.1k | 2433 | 243k | 6343 | 634k |
| 5361 | 5.36k | 1402 | 14.0k | 3652 | 36.5k | 9532 | 95.3k | 2493 | 249k | 6493 | 649k |
| 5491 | 5.49k | 1432 | 14.3k | 3742 | 37.4k | 9762 | 97.6k | 2553 | 255k | 6653 | 665k |
| 5621 | 5.62k | 1472 | 14.7k | 3832 | 38.3k | 1003 | 100k | 2613 | 261k | 6813 | 681k |
| 5761 | 5.76k | 1502 | 15.0k | 3922 | 39.2k | 1023 | 102k | 2673 | 267k | 6983 | 698k |
| 5901 | 5.90k | 1542 | 15.4k | 4022 | 40.2k | 1053 | 105k | 2743 | 274k | 7153 | 715k |
| 6041 | 6.04k | 1582 | 15.8k | 4122 | 41.2k | 1073 | 107k | 2803 | 280k | 7323 | 732k |
| 6191 | 6.19k | 1622 | 16.2k | 4222 | 42.2k | 1103 | 110k | 2873 | 287k | 7503 | 750k |
| 6341 | 6.34k | 1652 | 16.5k | 4322 | 43.2k | 1133 | 113k | 2943 | 294k | 7683 | 768k |
| 6491 | 6.49k | 1692 | 16.9k | 4422 | 44.2k | 1153 | 115k | 3013 | 301k | 7873 | 787k |
| 6651 | 6.65k | 1742 | 17.4k | 4532 | 45.3k | 1183 | 118k | 3093 | 309k | 8063 | 806k |
| 6811 | 6.81k | 1782 | 17.8k | 4642 | 46.4k | 1213 | 121k | 3163 | 316k | 8253 | 825k |
| 6981 | 6.98k | 1822 | 18.2k | 4752 | 47.5k | 1243 | 124k | 3243 | 324k | 8453 | 845k |
| 7151 | 7.15k | 1872 | 18.7k | 4872 | 48.7k | 1273 | 127k | 3323 | 332k | 8663 | 866k |
| 7321 | 7.32k | 1912 | 19.1k | 4992 | 49.9k | 1303 | 130k | 3403 | 340k | 8873 | 887k |
| 7501 | 7.50k | 1962 | 19.6k | 5112 | 51.1k | 1333 | 133k | 3483 | 348k | 9093 | 909k |
| 7681 | 7.68k | 2002 | 20.0k | 5232 | 52.3k | 1373 | 137k | 3573 | 357k | 9313 | 931k |
| 7871 | 7.87k | 2052 | 20.5k | 5362 | 53.6k | 1403 | 140k | 3653 | 365k | 9533 | 953k |
| 8061 | 8.06k | 2102 | 21.0k | 5492 | 54.9k | 1433 | 143k | 3743 | 374k | 9763 | 976k |
| 8251 | 8.25k | 2152 | 21.5k | 5622 | 56.2k | 1473 | 147k | 3833 | 383k | 1004 | 1M |
| 8451 | 8.45k | 2212 | 22.1k | 5762 | 57.6k | 1503 | 150k | 3923 | 392k | | |
| 8661 | 8.66k | 2262 | 22.6k | 5902 | 59.0k | 1543 | 154k | 4023 | 402k | | |
| 8871 | 8.87k | 2322 | 23.2k | 6042 | 60.4k | 1583 | 158k | 4123 | 412k | | |
| 9091 | 9.09k | 2372 | 23.7k | 6192 | 61.9k | 1623 | 162k | 4223 | 422k | | |

1. Not all resistor values may be available. Please contact factory.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 742X083101JP on WIN SOURCE](#)
-  [CTS Resistor Products Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management