



**THE DATASHEET OF
BCM603-3SQ**



Class CC and 10x38mm Modular Ferrule Fuse Blocks



Simplify installation and enhance safety with modular fuse blocks



New snap-together Class CC and 10x38mm ferrule fuse blocks speed up installation, increase flexibility and enhance safety.

Product description:

Bussmann ferrule fuse blocks feature a modular design that allows assembly of the required poles at point of use.

Available for Class CC and supplemental 10x38mm fuses, these blocks have features and accessories that add versatility, reduce labor and enhance safety of any panel design.

The fuse blocks are available in 1-, 2- and 3-pole configurations and feature the smallest width dimension in the market, consuming minimal panel space.

Features and benefits:

- Modular, snap-together design provides tool-less assembly of multiple pole blocks to save inventory and reduce assembly time.
- DIN-Rail and panel mount versatility allows one product to be used for multiple applications and lowers inventory cost.
- Optional see-through cover enhances safety with IP20 finger-safe protection, lockout/tagout capability and open circuit indication.
- Easy circuit identification with available universal marker labels for fuse block covers.



Bussmann is now a part of Eaton. Same great products plus even more. Learn more at www.eaton.com/cooper.

Bussmann
by **EATON**

Specifications

Ratings:

- Volts 600V
- Amps up to 30A
- Withstand 200kA RMS Sym

Agency information:

Class CC BCM Series

- UL Listed E14853 - IZLT
 - CSA Certified 47235-6225-01
- 10x38 (13/32" x 1-1/2") BMM Series
- UL Recognized E14853 - IZLT2
 - CSA Certified 47235-6225-01

Flammability ratings:

- Blocks — UL 94V0, self-extinguishing
- Covers — UL 94HB, self-extinguishing

Operating and storage temperature range:

- Blocks -40°C to +120°C
- Non indicating covers -40°C to +120°C
- Indicating covers -20°C to +90°C

Materials:

- Base — Thermoplastic
- Terminals — Tin-plated bimetallic copper
- Covers — Thermoplastic

Wire:

- Box lug terminal — Cu/AL, 75/90°C
- All other terminals — Cu, 75/90°C

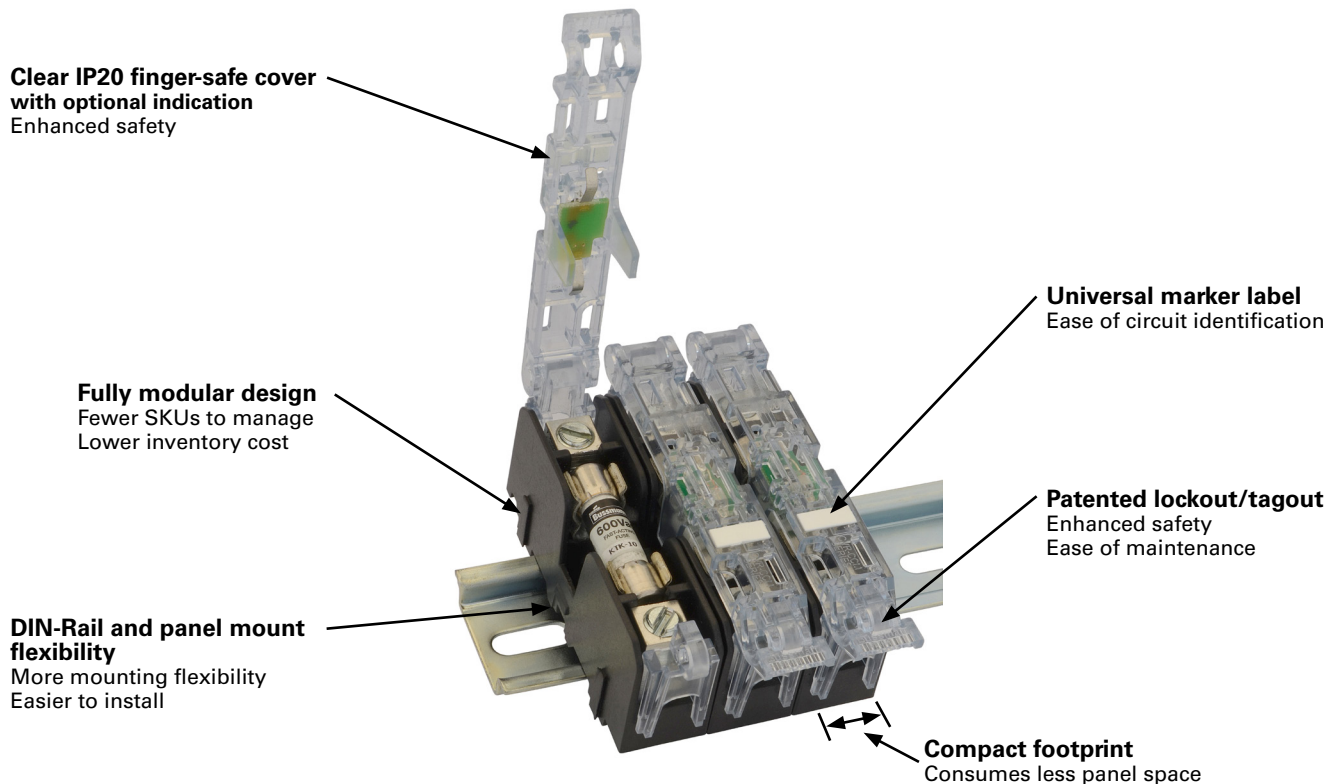


Table 1. Catalog numbers

| #10-32 Phil-slot screw | Terminal type | | | | Poles | Fuse class |
|------------------------|---------------------------|----------------|------------------------------------|-----------|-------|---|
| | Screw with quick connect* | Pressure plate | Pressure plate with quick connect* | Box lug | | |
| BCM603-1S | BCM603-1SQ | BCM603-1P | BCM603-1PQ | BCM603-1C | 1 | CC |
| BCM603-2S | BCM603-2SQ | BCM603-2P | BCM603-2PQ | BCM603-2C | 2 | CC |
| BCM603-3S | BCM603-3SQ | BCM603-3P | BCM603-3PQ | BCM603-3C | 3 | CC |
| — | BMM603-1SQ | — | BMM603-1PQ | BMM603-1C | 1 | 10x38 (13/32" x 1-1/2") |
| — | BMM603-2SQ | — | BMM603-2PQ | BMM603-2C | 2 | 10x38 (13/32" x 1-1/2") |
| — | BMM603-3SQ | — | BMM603-3PQ | BMM603-3C | 3 | 10x38 (13/32" x 1-1/2") |
| — | BCCMM603-3SQ | — | BCCMM603-3PQ | — | 3 | 3-Pole control circuit transformer block 2-pole CC with 1-pole 10x38 (13/32" x 1-1/2") |

*Quick Connect terminals rated for 20A maximum

Eaton's Bussmann Business
114 Old State Road
Ellisville, MO 63021
United States
www.bussmann.com

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 10307
January 2015

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BCM603-3SQ on WIN SOURCE](#)

 [Eaton Bussmann Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management