



**THE DATASHEET OF
BGF 109L E6328**



BGF109L

10 Channel LCD Filter Array with ESD Protection

Small Signal Discretes



Never stop thinking

Edition 2008-05-20

**Published by
Infineon Technologies AG
81726 München, Germany**

**© Infineon Technologies AG 2008.
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.


BGF109L**Revision History: 2008-05-20, V3.0****Previous Version: 2007-09-10, V2.1**

Page	Subjects (major changes since last revision)
5	Maximum ratings for DC current and power dissipation updated
5	Electrical characteristics for line resistance and capacitance updated
7	Package drawings updated

10 Channel LCD Filter Array with ESD Protection

Feature

- 10 channel integrated 5th order LC filter array
- Very good EMI compatibility
- ESD protection according to IEC61000-4-2 up to 15 kV contact discharge on all IOs
- Wafer Level Package with SnAgCu solder balls
- RoHS and WEEE compliant package



WLP-24-4-3D

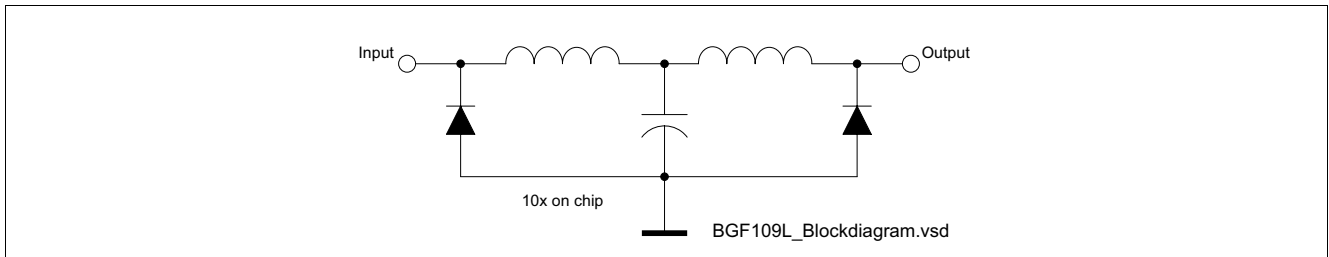


Figure 1 Blockdiagram

Description

The BGF109L is a 10 channel 5th order LC filter array to provide superior signal attenuation in the 800 - 2200 MHz range. EMI compatibility is very good in point of high power mobile TX signals. LCD data integrity will be much less affected by the mobile's TX signal.

All pins are protected against ESD up to 15 kV according to IEC61000-4-2 (contact discharge). The wafer level package is a green package with a size of only 2.1 mm x 2.1 mm and a total height of 0.6 mm.

Type	Package	Marking	Chip
BGF109L	WLP-24-4	BGF109L	N0729

10 Channel LCD Filter Array with ESD Protection
Table 1 Maximum Ratings

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Voltage at all pins to GND	V_P	0	-	5.0	V	
Operating temperature range	T_{OP}	-40	-	+85	°C	
Storage temperature range	T_{STG}	-65	-	+150	°C	
DC current for each line	I_{DC}		-	25	mA	$T_A < 85\text{ °C}$
Total dissipated power for all lines	P_{diss}		-	200	mW	$T_A < 85\text{ °C}$
Electrostatic discharge according to IEC61000-4-2 ¹⁾ at all pins	V_{ESD}	-15	-	+15	kV	

1) Contact discharge

Table 2 Electrical Characteristics¹⁾

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Series Resistors $R_1 \dots R_{10}$	R	68	90	112	Ω	
Line capacitance of each line to GND	C_T	36	42.5 28	49	pF	$V_R = 0\text{ V}$ $V_R = 3\text{ V}$
Leakage currents of lines to GND	I_R			200	nA	$V_R = 3\text{ V}$
Breakdown voltage of ESD diodes	I_R	6.5	7.8	-	V	$I_{(BR)} = 1\text{ mA}$
Stopband attenuation Input of output pin ²⁾	IL_{800} IL_{2200}		45 35		dB	$f = 800\text{ MHz}$ $f = 2200\text{ MHz}$
Cross talk between adjacent channels 2 channel, all pins ²⁾	CT_{800} CT_{2200}		-30 -20		dB	$f = 800\text{ MHz}$ $f = 2200\text{ MHz}$

1) at $T_A = 25\text{ °C}$

2) $Z_S = Z_L = 50\ \Omega$, 0 V bias

10 Channel LCD Filter Array with ESD Protection

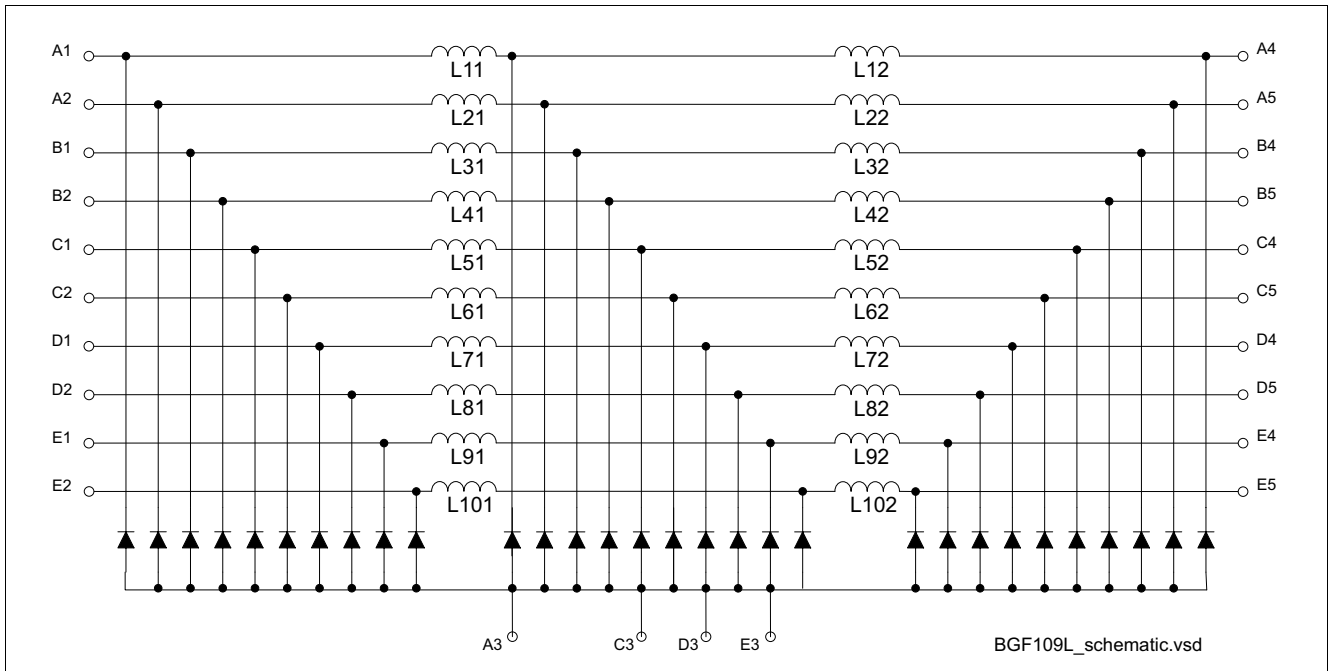


Figure 2 Schematic

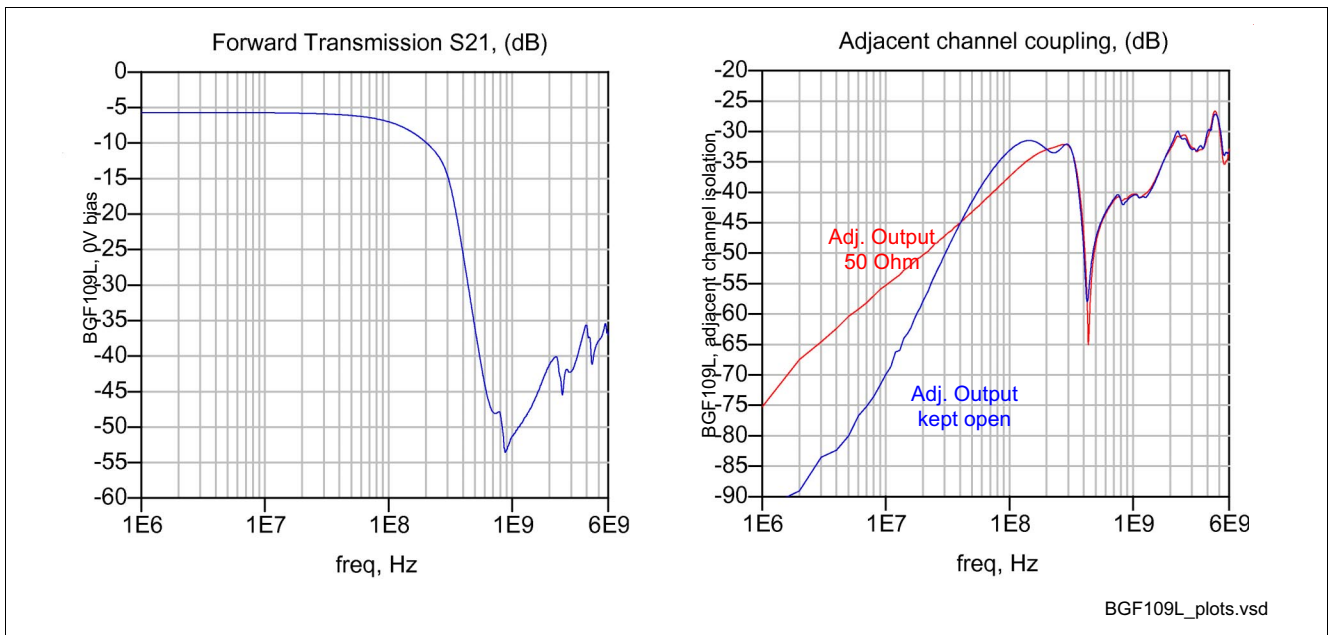


Figure 3 Filter characteristic of one channel and the crosstalk between adjacent channels with different termination

Package Outline

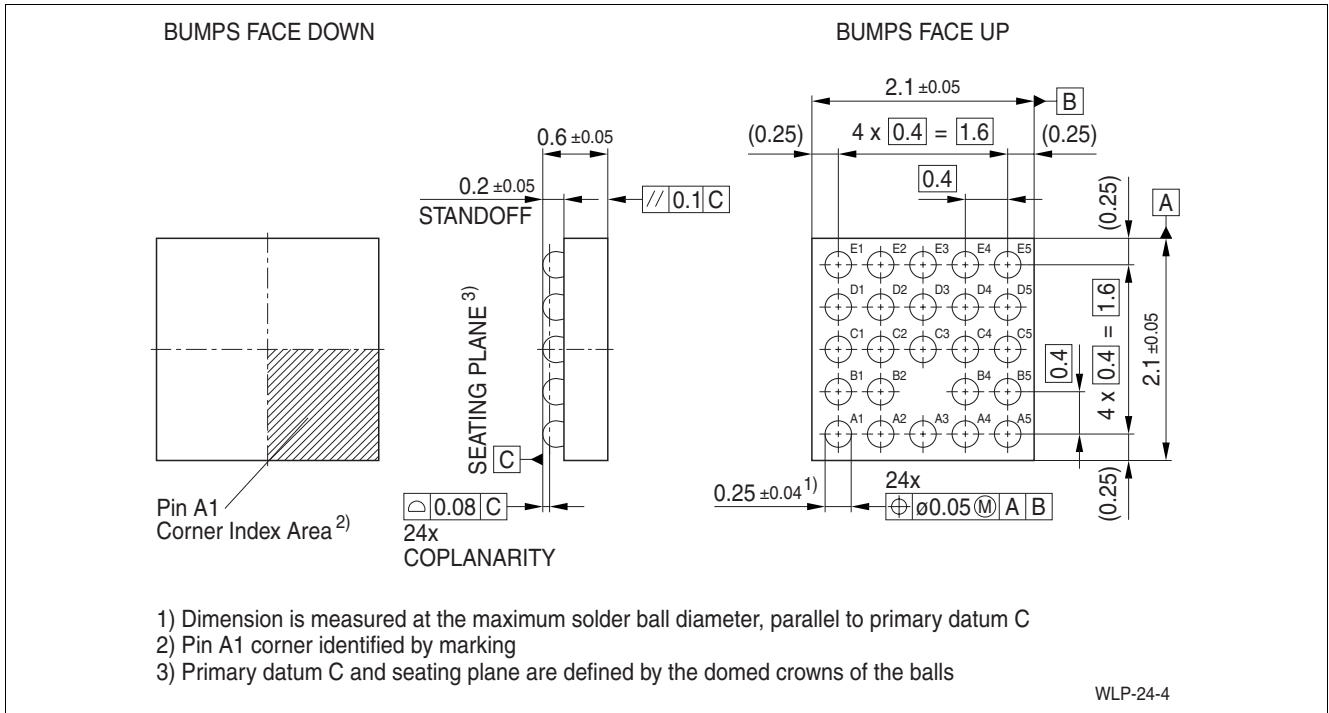


Figure 4 Package WLP-24-4

Tape and reel specification

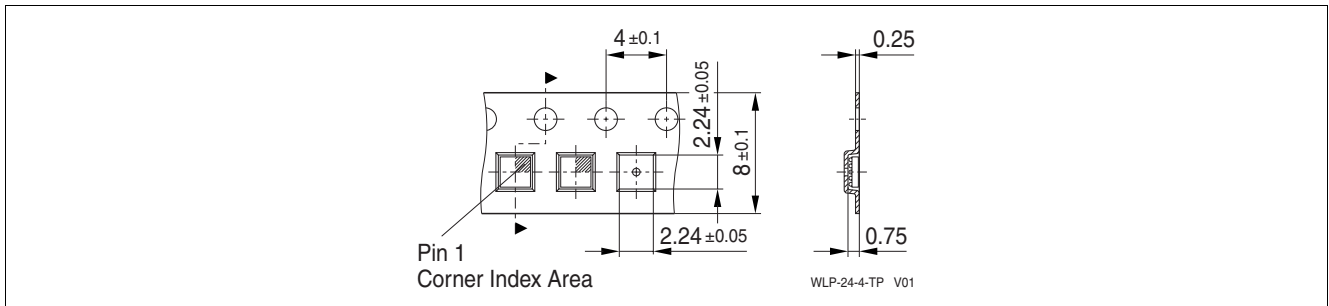


Figure 5 Tape for WLP-24-4

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View BGF 109L E6328 on WIN SOURCE](#)
- [Infineon Technologies Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management