



**THE DATASHEET OF  
BTA08-600SRG**



### Snubberless™, logic level and standard 8 A Triacs



#### Features

- On-state rms current,  $I_{T(RMS)}$  8 A
- Repetitive peak off-state voltage,  $V_{DRM} / V_{RRM}$  600 V to 800 V
- Triggering gate current,  $I_{GT}$  5 to 50 mA

#### Description

Available either in through-hole and surface-mount packages, these devices are suitable for general purpose AC switching. They can be used as an ON/OFF function in applications such as static relays, heating regulation, induction motor starting circuits or for phase control operation in light dimmers and motor speed controllers, etc.

The Snubberless versions (BTA, BTB08\_XXXXW and T8 series) are specially recommended for use on inductive loads, thanks to their high commutation performance.

Logic level versions are designed to interface directly with low power drivers such as Microcontrollers.

By using an internal ceramic pad, the BTA series provide voltage insulated tab (rated at 2500  $V_{RMS}$ ) in compliance with UL standards (file ref.: E81734).

#### Product status link

[BTA08](#)

[BTB08](#)

[T810](#)

[T835](#)

[T850](#)

# 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_j = 25\text{ °C}$  unless otherwise stated)**

| Symbol       | Parameter  |  |                        | Value       | Unit             |
|--------------|--|--|------------------------|-------------|------------------|
| $I_{T(RMS)}$ | RMS on-state current (full sine wave)  | IPAK, DPAK, TO-220AB, D <sup>2</sup> PAK | $T_c = 110\text{ °C}$  | 8           | A                |
|              |  | TO-220AB Ins.                            | $T_c = 100\text{ °C}$  |             |                  |
| $I_{TSM}$    | Non repetitive surge peak on-state current (full cycle, $T_j$ initial = $25\text{ °C}$ )     | $f = 50\text{ Hz}$                       | $t = 20\text{ ms}$     | 80          | A                |
|              |  | $f = 60\text{ Hz}$                       | $t_p = 16.7\text{ ms}$ | 84          |                  |
| $I^2t$       | $I^2t$ value for fusing  |  | $t_p = 10\text{ ms}$   | 36          | A <sup>2</sup> s |
| $di/dt$      | Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$ , $t_r \leq 100\text{ ns}$ | $f = 120\text{ Hz}$                      | $T_j = 125\text{ °C}$  | 50          | A/ $\mu$ s       |
| $I_{GM}$     | Peak gate current  | $t_p = 20\text{ }\mu$ s                  | $T_j = 125\text{ °C}$  | 4           | A                |
| $P_{G(AV)}$  | Average gate power dissipation   |  | $T_j = 125\text{ °C}$  | 1           | W                |
| $T_{stg}$    | Storage junction temperature range   |  |                        | -40 to +150 | °C               |
| $T_j$        | Operating junction temperature range   |  |                        | -40 to +125 | °C               |

**Table 2. Electrical characteristics ( $T_j = 25\text{ °C}$ , unless otherwise specified) Snubberless and logic level (3 quadrants)**

| Symbol            | Parameter  | Quadrant     | T8   |     |     | BTA08/BTB08 |     |      |     | Unit |            |
|-------------------|--|--------------|------|-----|-----|-------------|-----|------|-----|------|------------|
|                   |  |              | 10   | 35  | 50  | TW          | SW  | CW   | BW  |      |            |
| $I_{GT}^{(1)}$    | $V_D = 12\text{ V}$ , $R_L = 30\text{ }\Omega$                       | I - II - III | Max. | 10  | 35  | 50          | 5   | 10   | 35  | 50   | mA         |
| $V_{GT}$          |  | I - II - III | Max. | 1.2 |     |             |     | V    |     |      |            |
| $V_{GD}$          | $V_D = V_{DRM}$ , $R_L = 3.3\text{ k}\Omega$ , $T_j = 125\text{ °C}$ | I - II - III | Min. | 0.2 |     |             |     | V    |     |      |            |
| $I_H^{(2)}$       | $I_T = 100\text{ mA}$  | I - II - III | Max. | 15  | 35  | 75          | 10  | 15   | 35  | 50   | mA         |
| $I_L$             | $I_G = 1.2 \times I_{GT}$  | I - III      | Max. | 25  | 50  | 70          | 10  | 25   | 50  | 70   | mA         |
|                   |  | II           | Max. | 30  | 60  | 110         | 15  | 30   | 60  | 80   |            |
| $dV/dt^{(2)}$     | $V_D = 67\% V_{DRM}$ , gate open, $T_j = 125\text{ °C}$              |              | Max. | 40  | 400 | 1000        | 20  | 40   | 400 | 1000 | V/ $\mu$ s |
| $(di/dt)_c^{(2)}$ | $(dV/dt)_c = 0.1\text{ V}/\mu$ s, $T_j = 125\text{ °C}$              |              | Min. | 5.4 |     |             | 3.5 | 5.4  |     |      | A/ms       |
|                   | $(dV/dt)_c = 10\text{ V}/\mu$ s, $T_j = 125\text{ °C}$               |              | Min. | 2.8 |     |             | 1.5 | 2.98 |     |      |            |
|                   | Without snubber, $T_j = 125\text{ °C}$                               |              | Min. |     | 4.5 | 7           |     |      | 4.5 | 7    |            |

1. Minimum  $I_{GT}$  is guaranteed at 5 % of  $I_{GT}$  max.

2. For both polarities of A2 referenced to A1

**Table 3. Standard (4 quadrants)**

| Symbol            | Parameter   | Quadrant     |      | BTA08/BTB08 |     | Unit             |
|-------------------|---|--------------|------|-------------|-----|------------------|
|                   |   |              |      | C           | B   |                  |
| $I_{GT}^{(1)}$    | $V_D = 12\text{ V}, R_L = 33\ \Omega$                                     | I - II - III | Max. | 25          | 50  | mA               |
|                   |   | IV           |      | 50          | 100 |                  |
| $V_{GT}$          |   | All          | Max. | 1.3         |     | V                |
| $V_{GD}$          | $V_D = V_{DRM}, R_L = 33\text{ k}\Omega, T_j = 125\text{ }^\circ\text{C}$ | All          | Min. | 0.2         |     | V                |
| $I_H^{(2)}$       | $I_T = 500\text{ mA}$   | I - II - III | Max. | 25          | 50  | mA               |
| $I_L$             | $I_G = 1.2\ I_{GT}$   | I - III - IV | Max. | 40          | 50  | mA               |
|                   |   | II           |      | 80          | 100 |                  |
| $dV/dt^{(2)}$     | $V_D = 67\% V_{DRM}$ gate open, $T_j = 125\text{ }^\circ\text{C}$         |              | Min. | 200         | 400 | V/ $\mu\text{s}$ |
| $(dV/dt)_C^{(2)}$ | $(dI/dt)_C = 3.5\text{ A/ms}, T_j = 125\text{ }^\circ\text{C}$            |              | Min. | 5           | 10  | V/ $\mu\text{s}$ |

1. Minimum  $I_{GT}$  is guaranteed at 5 % of  $I_{GT}$  max.
2. For both polarities of A2 referenced to A1

**Table 4. Static electrical characteristics**

| Symbol             | Test conditions                                |                                   |      | Value | Unit          |
|--------------------|--|-----------------------------------|------|-------|---------------|
| $V_{TM}^{(1)}$     | $I_{TM} = 11\text{ A}, t_p = 380\ \mu\text{s}$ | $T_j = 25\text{ }^\circ\text{C}$  | Max. | 1.55  | V             |
| $V_{TO}^{(1)}$     | threshold on-state voltage                     | $T_j = 125\text{ }^\circ\text{C}$ | Max. | 0.85  | V             |
| $R_D^{(1)}$        | Dynamic resistance                             | $T_j = 125\text{ }^\circ\text{C}$ | Max. | 50    | m $\Omega$    |
| $I_{DRM}\ I_{RRM}$ | $V_{DRM} = V_{RRM}$                            | $T_j = 25\text{ }^\circ\text{C}$  | Max. | 5     | $\mu\text{A}$ |
|                    |  | $T_j = 125\text{ }^\circ\text{C}$ | Max. | 1     | mA            |

1. For both polarities of A2 referenced to A1


**Table 5. Thermal resistance**

| Symbol        | Parameter                                     |                               | Value                          | Unit |                    |
|---------------|---|-------------------------------|--------------------------------|------|--------------------|
| $R_{th(j-c)}$ | Max. junction to case thermal resistance (AC) |                               | IPAK / D2PAK / DPAK / TO-220AB | 1.6  | $^\circ\text{C/W}$ |
|               |   |                               | TO-220AB Insulated             | 2.5  |                    |
| $R_{th(j-a)}$ | Junction to ambient (typ.)                    | $S = 2\text{ cm}^2^{(1)}$     | D <sup>2</sup> PAK             | 45   | $^\circ\text{C/W}$ |
|               |   | $S = 1\text{ cm}^2^{(1)}$     | DPAK                           | 70   |                    |
|               | Junction to ambient (typ.)                    | TO-220AB / TO-220AB Insulated |                                | 60   |                    |
|               |   | IPAK                          |                                | 100  |                    |

1.  $S$  = Copper surface under tab.

### 1.1 Characteristics (curves)

**Figure 1. Maximum power dissipation versus on-state RMS current (full cycle)**

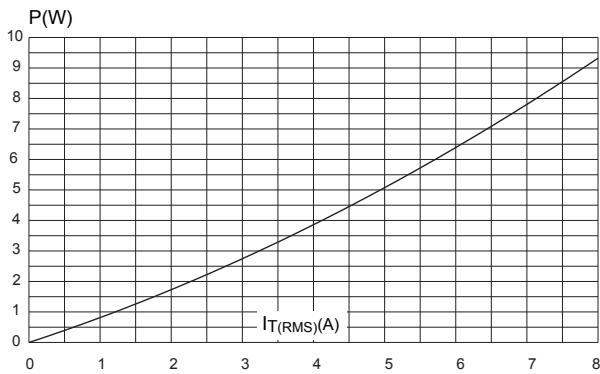

**Figure 2. RMS on-state current versus temperature (full cycle)**









**Figure 3. RMS on-state current versus ambient temperature (full cycle)**



**Figure 4. Relative variation of thermal impedance versus pulse duration**

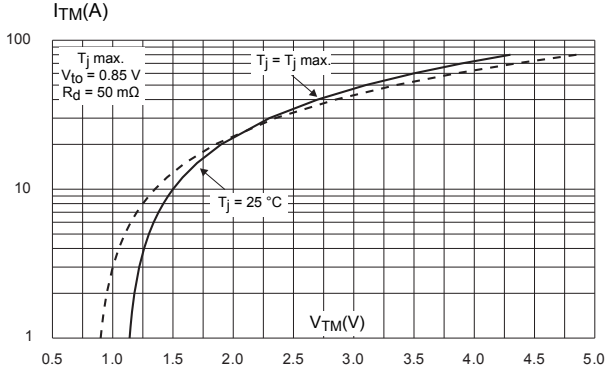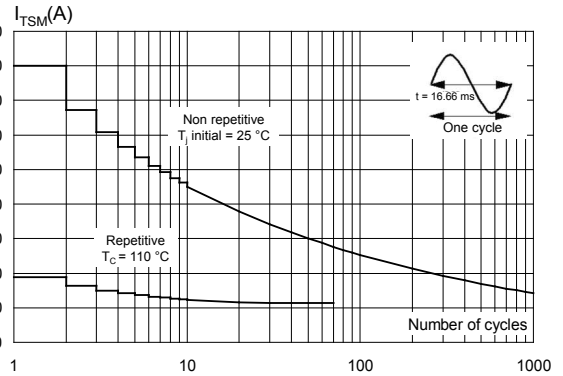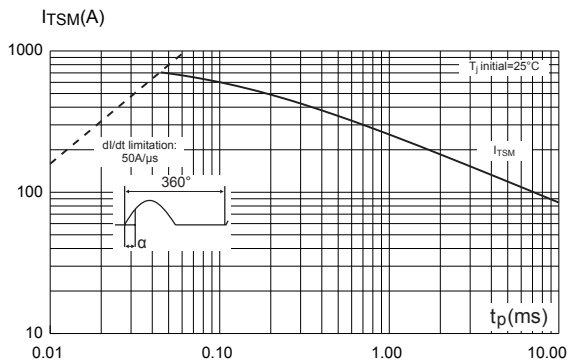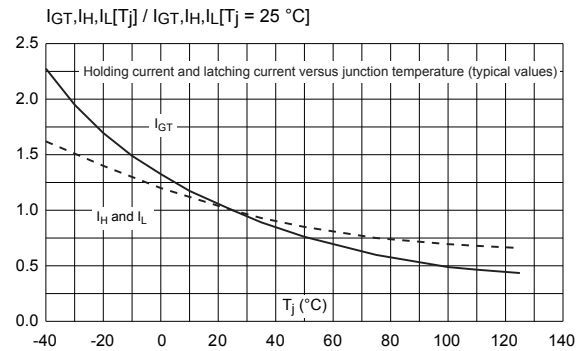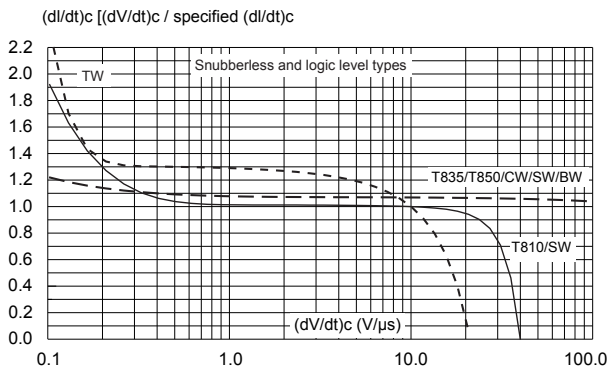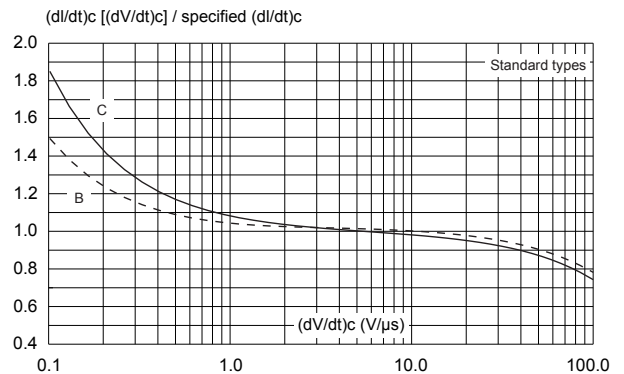


**Figure 5. On-state characteristics (maximum values)**

**Figure 6. Surge peak on-state current versus number of cycles**

**Figure 7. Non repetitive surge peak on-state current for a sinusoidal pulse ( $t_p < 10$  ms)**

**Figure 8. Relative variation of gate trigger current**

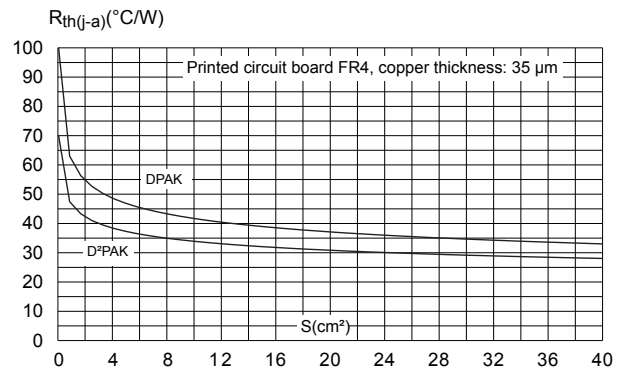**Figure 9. Relative variation of critical rate of decrease of main current versus  $(dV/dt)_c$  (typical values)**

**Figure 10. Relative variation of critical rate of decrease of main current versus  $(dV/dt)_c$  (typical values)**


**Figure 11. Relative variation of critical rate of decrease of main current versus junction temperature**



**Figure 12. DPAK and D2PAK thermal resistance junction to ambient versus copper surface under tab**



## **2** Package information

---

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

## 2.1 DPAK package information

- Epoxy meets UL94, V0
- Lead-free package
- Recommended torque: 0.4 to 0.6 N·m

Figure 13. DPAK package outline




**Table 6. DPAK package mechanical data**

| Ref. | Dimensions  |      |       |                       |        |        |
|------|-------------|------|-------|-----------------------|--------|--------|
|      | Millimeters |      |       | Inches <sup>(1)</sup> |        |        |
|      | Min.        | Typ. | Max.  | Min.                  | Typ.   | Max.   |
| A    | 2.18        |      | 2.40  | 0.0858                |        | 0.0945 |
| A1   | 0.90        |      | 1.10  | 0.0354                |        | 0.0433 |
| A2   | 0.03        |      | 0.23  | 0.0012                |        | 0.0091 |
| b    | 0.64        |      | 0.90  | 0.0252                |        | 0.354  |
| b4   | 4.95        |      | 5.46  | 0.1949                |        | 0.2150 |
| c    | 0.46        |      | 0.61  | 0.0181                |        | 0.0240 |
| c2   | 0.46        |      | 0.60  | 0.0181                |        | 0.0236 |
| D    | 5.97        |      | 6.22  | 0.2350                |        | 0.2449 |
| D1   | 5.10        |      |       | 0.2008                |        |        |
| E    | 6.35        |      | 6.73  | 0.2500                |        | 0.2650 |
| E1   | 4.32        |      |       | 0.1701                |        |        |
| e    |             | 2.29 |       |                       | 0.0900 |        |
| e1   |             | 4.57 |       |                       | 0.1800 |        |
| H    | 9.35        |      | 10.40 | 0.3681                |        | 0.4094 |
| L    | 1.00        |      | 1.78  | 0.0394                |        | 0.0701 |
| L2   |             |      | 1.27  |                       |        | 0.0500 |
| L4   | 0.60        |      | 1.02  | 0.0236                |        | 0.0402 |
| V2   | 0°          |      | +8°   | 0°                    |        | +8°    |

1. Dimensions in inches are given for reference only

Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

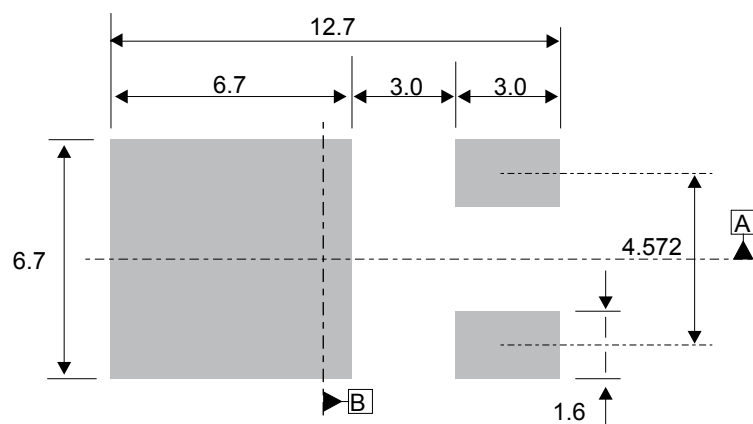**Figure 14. DPAK recommended footprint (dimensions are in mm)**


The device must be positioned within  $\oplus 0.05 \text{ AB}$

## 2.2 IPAK package information

Figure 15. IPAK package outline



*Note:* This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

**Table 7. IPAK package mechanical data**

| Ref. | Dimensions  |       |      |                       |        |        |
|------|-------------|-------|------|-----------------------|--------|--------|
|      | Millimeters |       |      | Inches <sup>(1)</sup> |        |        |
|      | Min.        | Typ.  | Max. | Min.                  | Typ.   | Max.   |
| A    | 2.20        |       | 2.40 | 0.0866                |        | 0.0945 |
| A1   | 0.90        |       | 1.10 | 0.0354                |        | 0.0433 |
| b    | 0.64        |       | 0.90 | 0.0252                |        | 0.0354 |
| b2   |             |       | 0.95 |                       |        | 0.0374 |
| b4   | 5.20        |       | 5.43 | 0.2047                |        | 0.2138 |
| B5   |             | 0.30  |      |                       | 0.0118 |        |
| c    | 0.45        |       | 0.60 | 0.0177                |        | 0.0236 |
| c2   | 0.46        |       | 0.60 | 0.0181                |        | 0.0236 |
| D    | 6.00        |       | 6.20 | 0.2362                |        | 0.2441 |
| E    | 6.40        |       | 6.65 | 0.2520                |        | 0.2618 |
| e    |             | 2.28  |      |                       | 0.0898 |        |
| e1   | 4.40        |       | 4.60 | 0.1732                |        | 0.1811 |
| H    |             | 16.10 |      |                       | 0.6339 |        |
| L    | 9.00        |       | 9.60 | 0.3545                |        | 0.3780 |
| L1   | 0.80        |       | 1.20 | 0.0315                |        | 0.0472 |
| L2   |             | 0.80  | 1.25 |                       | 0.0315 | 0.0492 |
| V1   |             | 10°   |      |                       | 10°    |        |

1. Inch dimensions are for reference only.

### 2.3 TO-220AB insulated package information

Figure 16. TO-220AB insulated package outline



(1) Resin gate position accepted in one of the two positions or in the symmetrical opposites.

**Table 8. TO-220AB insulated package mechanical data**

| Ref. | Dimensions  |       |       |        |        |        |
|------|-------------|-------|-------|--------|--------|--------|
|      | Millimeters |       |       | Inches |        |        |
|      | Min.        | Typ.  | Max.  | Min.   | Typ.   | Max.   |
| A    | 15.20       |       | 15.90 | 0.5984 |        | 0.6260 |
| a1   |             | 3.75  |       |        | 0.1476 |        |
| a2   | 13.00       |       | 14.00 | 0.5118 |        | 0.5512 |
| B    | 10.00       |       | 10.40 | 0.3937 |        | 0.4094 |
| b1   | 0.61        |       | 0.88  | 0.0240 |        | 0.0346 |
| b2   | 1.23        |       | 1.32  | 0.0484 |        | 0.0520 |
| C    | 4.40        |       | 4.60  | 0.1732 |        | 0.1811 |
| c1   | 0.49        |       | 0.70  | 0.0193 |        | 0.0276 |
| c2   | 2.40        |       | 2.72  | 0.0945 |        | 0.1071 |
| e    | 2.40        |       | 2.70  | 0.0945 |        | 0.1063 |
| F    | 6.20        |       | 6.60  | 0.2441 |        | 0.2598 |
| I    | 3.73        |       | 3.88  | 0.1469 |        | 0.1528 |
| L    | 2.65        |       | 2.95  | 0.1043 |        | 0.1161 |
| I2   | 1.14        |       | 1.70  | 0.0449 |        | 0.0669 |
| I3   | 1.14        |       | 1.70  | 0.0449 |        | 0.0669 |
| I4   | 15.80       | 16.40 | 16.80 | 0.6220 | 0.6457 | 0.6614 |
| M    |             | 2.6   |       |        | 0.1024 |        |

1. Inch dimensions are for reference only.

## 2.4 D<sup>2</sup>PAK package information

Figure 17. D<sup>2</sup>PAK package outline



(1) Resin gate position accepted in one of the two positions or in the symmetrical opposites

**Table 9. D<sup>2</sup>PAK package mechanical data**

| Ref. | Dimensions  |      |       |        |        |        |
|------|-------------|------|-------|--------|--------|--------|
|      | Millimeters |      |       | Inches |        |        |
|      | Min.        | Typ. | Max.  | Min.   | Typ.   | Max.   |
| A    | 4.30        |      | 4.60  | 0.1693 |        | 0.1811 |
| A1   | 2.49        |      | 2.69  | 0.0980 |        | 0.1059 |
| A2   | 0.03        |      | 0.23  | 0.0012 |        | 0.0091 |
| A3   |             | 0.25 |       |        | 0.0098 |        |
| b    | 0.70        |      | 0.93  | 0.0276 |        | 0.0366 |
| b2   | 1.25        |      | 1.7   | 0.0492 |        | 0.0669 |
| c    | 0.45        |      | 0.60  | 0.0177 |        | 0.0236 |
| c2   | 1.21        |      | 1.36  | 0.0476 |        | 0.0535 |
| D    | 8.95        |      | 9.35  | 0.3524 |        | 0.3681 |
| D1   | 7.50        |      | 8.00  | 0.2953 |        | 0.3150 |
| D2   | 1.30        |      | 1.70  | 0.0512 |        | 0.0669 |
| e    | 2.54        |      |       | 0.1    |        |        |
| E    | 10.00       |      | 10.28 | 0.3937 |        | 0.4047 |
| E1   | 8.30        |      | 8.70  | 0.3268 |        | 0.3425 |
| E2   | 6.85        |      | 7.25  | 0.2697 |        | 0.2854 |
| G    | 4.88        |      | 5.28  | 0.1921 |        | 0.2079 |
| H    | 15          |      | 15.85 | 0.5906 |        | 0.6240 |
| L    | 1.78        |      | 2.28  | 0.0701 |        | 0.0898 |
| L2   | 1.27        |      | 1.40  | 0.0500 |        | 0.0551 |
| L3   | 1.40        |      | 1.75  | 0.0551 |        | 0.0689 |
| R    |             | 0.40 |       |        | 0.0157 |        |
| V2   | 0°          |      | 8°    | 0°     |        | 8°     |

1. Dimensions in inches are given for reference only

Figure 18. D<sup>2</sup>PAK recommended footprint (dimensions are in mm)



### 3 Ordering information

**Figure 19. Ordering information scheme (BTA08 and BTB08 series)**

**Figure 20. Ordering information scheme (T8 series)**


**Table 10. Product selector**

| Part Number | Voltage (xxx) |     | Sensitivity | Type         | Package            |
|-------------|---------------|-----|-------------|--------------|--------------------|
|             | 600           | 800 |             |              |                    |
| T810-xxxB   | X             | X   | 10 mA       | Logic Level  | DPAK               |
| T835-xxxH   | X             |     | 35 mA       | Snubberless™ | IPAK               |
| T810-xxxG   | X             |     | 10 mA       | Logic Level  | D <sup>2</sup> PAK |
| T835-xxxG   | X             | X   | 35 mA       | Snubberless™ | D <sup>2</sup> PAK |
| T850-xxxG   | X             | X   | 50 mA       | Snubberless™ | D <sup>2</sup> PAK |
| BTA08-xxxS  | X             |     | 10 mA       | Logic Level  | TO-220AB Ins.      |
| BTA08-xxxC  | X             | X   | 35 mA       | Standard     | TO-220AB Ins.      |
| BTA08-xxxB  | X             |     | 50 mA       | Standard     | TO-220AB Ins.      |
| BTA08-xxxTW | X             |     | 5 mA        | Logic Level  | TO-220AB Ins.      |
| BTA08-xxxSW | X             |     | 10 mA       | Logic Level  | TO-220AB Ins.      |
| BTA08-xxxCW | X             |     | 35 mA       | Snubberless™ | TO-220AB Ins.      |
| BTA08-xxxBW | X             | X   | 50 mA       | Snubberless™ | TO-220AB Ins.      |
| BTB08-xxxS  | X             |     | 10 mA       | Logic Level  | TO-220AB           |
| BTB08-xxxC  | X             |     | 35 mA       | Standard     | TO-220AB           |
| BTB08-xxxB  | X             |     | 50 mA       | Standard     | TO-220AB           |
| BTB08-xxxTW | X             | X   | 5 mA        | Logic Level  | TO-220AB           |
| BTB08-xxxSW | X             |     | 10 mA       | Logic Level  | TO-220AB           |
| BTB08-xxxCW | X             | X   | 35 mA       | Snubberless™ | TO-220AB           |
| BTB08-xxxBW | X             |     | 50 mA       | Snubberless™ | TO-220AB           |

**Table 11. Ordering information**

| Order code    | Marking     | Package            | Weight | Base qty.          | Delivery mode |      |               |
|---------------|-------------|--------------------|--------|--------------------|---------------|------|---------------|
| T810-600B     | T8 1060     | DPAK               | 0.30   | 75                 | Tube          |      |               |
| T835-600B     | T8 3560     |                    |        |                    |               |      |               |
| T835-800B     | T8 3580     |                    |        |                    |               |      |               |
| T810-600B-TR  | T8 1060     |                    |        | D <sup>2</sup> PAK | 1.50          | 2500 | Tape&Reel 13" |
| T810-800B-TR  | T8 1080     |                    |        |                    |               |      |               |
| T835-600B-TR  | T8 3560     |                    |        |                    |               |      |               |
| T835-800B-TR  | T8 3580     |                    |        |                    |               |      |               |
| T835-600H     | T8 3560     | IPAK               | 0.40   | 75                 | Tube          |      |               |
| T835-600G     | T835-600G   | D <sup>2</sup> PAK | 1.50   | 50                 | Tube          |      |               |
| T835-8G       | T835-8G     |                    |        |                    |               |      |               |
| T850-6G       | T850-6G     |                    |        |                    |               |      |               |
| T850-8G       | T850-8G     |                    |        |                    |               |      |               |
| T810-600G-TR  | T810-600G   |                    |        | 1000               | Tape&Reel 13" |      |               |
| T835-600G-TR  | T835-600G   |                    |        |                    |               |      |               |
| T835-8G-TR    | T835-8G     |                    |        |                    |               |      |               |
| T850-6G-TR    | T850-6G     |                    |        |                    |               |      |               |
| T850-8G-TR    | T850-8G     | TO-220AB           | 2.30   | 50                 | Tube          |      |               |
| BTA08-600SRG  | BTA08-600S  |                    |        |                    |               |      |               |
| BTA08-600BRG  | BTA08-600B  |                    |        |                    |               |      |               |
| BTA08-600CRG  | BTA08-600C  |                    |        |                    |               |      |               |
| BTA08-800CRG  | BTA08-800C  |                    |        |                    |               |      |               |
| BTA08-600BWRG | BTA08-600BW |                    |        |                    |               |      |               |
| BTA08-600CWRG | BTA08-600CW |                    |        |                    |               |      |               |
| BTA08-600SWRG | BTA08-600SW |                    |        |                    |               |      |               |
| BTA08-600TWRG | BTA08-600TW |                    |        |                    |               |      |               |
| BTA08-800BWRG | BTA08-800BW |                    |        |                    |               |      |               |
| BTB08-600BRG  | BTB08-600B  |                    |        |                    |               |      |               |
| BTB08-600CRG  | BTB08-600C  |                    |        |                    |               |      |               |
| BTB08-600SRG  | BTB08-600S  |                    |        |                    |               |      |               |
| BTB08-600BWRG | BTB08-600BW |                    |        |                    |               |      |               |
| BTB08-600CWRG | BTB08-600CW |                    |        |                    |               |      |               |
| BTB08-600SWRG | BTB08-600SW |                    |        |                    |               |      |               |
| BTB08-600TWRG | BTB08-600TW |                    |        |                    |               |      |               |
| BTB08-800CWRG | BTB08-800CW |                    |        |                    |               |      |               |
| BTB08-800TWRG | BTB08-800TW |                    |        |                    |               |      |               |

**Table 12. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| Apr-2002    | 5A       | Last update.   |
| 13-Feb-2006 | 6        | TO-220AB delivery mode changed from bulk to tube. ECOPACK statement added.   |
| 10-Mar-2010 | 7        | Updated ECOPACK statement and Figure 26  |
| 02-Jun-2014 | 8        | Updated DPAK and IPAK package information and reformatted to current standard.   |
| 07-Nov-2016 | 9        | Updated Table 1 and reformatted to current standard.   |
| 06-Jan-2017 | 10       | Updated Figure 20: "Ordering information scheme (T8 series)", Table 10: "Product selector" and Table 11: "Ordering information".   |
| 09-Feb-2017 | 11       | Added T850 package information.  |
| 24-Apr-2017 | 12       | Updated Figure 6..<br>Minor text changes to improve readability.   |
| 14-Mar-2018 | 13       | Updated Table 2. Electrical characteristics ( $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified) Snubberless and logic level (3 quadrants), cover image, Figure 9. Relative variation of critical rate of decrease of main current versus $(dV/dt)_c$ (typical values) and Figure 20. Ordering information scheme (T8 series). |
| 14-May-2018 | 14       | Updated product status links.  |
| 09-Aug-2018 | 15       | Updated Table 3. Standard (4 quadrants).   |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.



ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BTA08-600SRG on WIN SOURCE](#)
-  [STMicroelectronics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management