



**THE DATASHEET OF
NCV8401BDTRKG**



Self-Protected Low Side Driver with Temperature and Current Limit

NCV8401A, NCV8401B

NCV8401A/B is a three terminal protected Low-Side Smart Discrete device. The protection features include overcurrent, overtemperature, ESD and integrated Drain-to-Gate clamping for overvoltage protection. This device offers protection and is suitable for harsh automotive environments.

Features


- Short Circuit Protection
- Thermal Shutdown with Automatic Restart
- Over Voltage Protection
- Integrated Clamp for Inductive Switching
- ESD Protection
- dV/dt Robustness
- Analog Drive Capability (Logic Level Input)
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

Typical Applications

- Switch a Variety of Resistive, Inductive and Capacitive Loads
- Can Replace Electromechanical Relays and Discrete Circuits
- Automotive / Industrial


| V _{DSS} (Clamped) | R _{DS(ON)} TYP | I _D MAX (Limited) |
|----------------------------|-------------------------|------------------------------|
| 42 V | 23 mΩ @ 10 V | 33 A* |

*Max current may be limited below this value depending on input conditions.

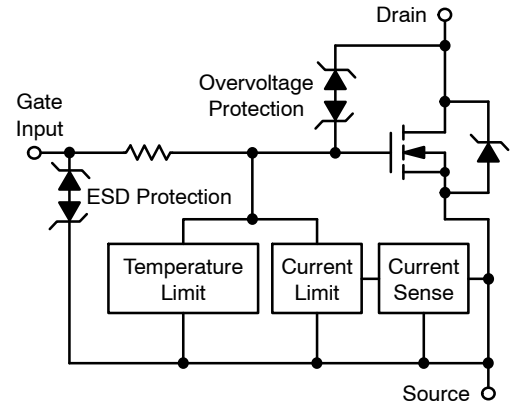

**DPAK
CASE 369C
STYLE 2**

MARKING DIAGRAM



| | | | |
|-------|-------------------|---|----------|
| Y | = Year | 1 | = Gate |
| WW | = Work Week | 2 | = Drain |
| xxxxx | = 8401A or 8401B | 3 | = Source |
| G | = Pb-Free Package | | |

ORDERING INFORMATION

| Device | Package | Shipping† |
|---------------|----------------|------------------|
| NCV8401ADTRKG | DPAK (Pb-Free) | 2500/Tape & Reel |
| NCV8401BDTRKG | DPAK (Pb-Free) | 2500/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

NCV8401A, NCV8401B

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating | Symbol | Value | Unit |
|--|---|--------------------|--------------------|
| Drain-to-Source Voltage Internally Clamped | V_{DSS} | 42 | V |
| Drain-to-Gate Voltage Internally Clamped ($R_{GS} = 1.0\text{ M}\Omega$) | V_{DGR} | 42 | V |
| Gate-to-Source Voltage | V_{GS} | ± 14 | V |
| Drain Current - Continuous | I_D | Internally Limited | |
| Total Power Dissipation @ $T_A = 25^\circ\text{C}$ (Note 1) @ $T_A = 25^\circ\text{C}$ (Note 2) | P_D | 1.1 2.0 | W |
| Thermal Resistance, Junction-to-Case Junction-to-Ambient (Note 1) Junction-to-Ambient (Note 2) | $R_{\theta JC}$ $R_{\theta JA}$ $R_{\theta JA}$ | 1.6 110 60 | $^\circ\text{C/W}$ |
| Single Pulse Drain-to-Source Avalanche Energy ($V_{DD} = 25\text{ Vdc}$, $V_{GS} = 5.0\text{ Vdc}$, $I_L = 3.65\text{ Apk}$, $L = 120\text{ mH}$, $R_G = 25\ \Omega$, $T_{Jstart} = 150^\circ\text{C}$) (Note 3) | E_{AS} | 800 | mJ |
| Load Dump Voltage ($V_{GS} = 0$ and 10 V , $R_I = 2.0\ \Omega$, $R_L = 3.0\ \Omega$, $t_d = 400\text{ ms}$) | V_{LD} | 65 | V |
| Operating Junction Temperature | T_J | -40 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -55 to 150 | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Minimum FR4 PCB, steady state.
2. Mounted onto a 2" square FR4 board
(1" square, 2 oz. Cu 0.06" thick single-sided, $t = \text{steady state}$).
3. Not subject to production testing.

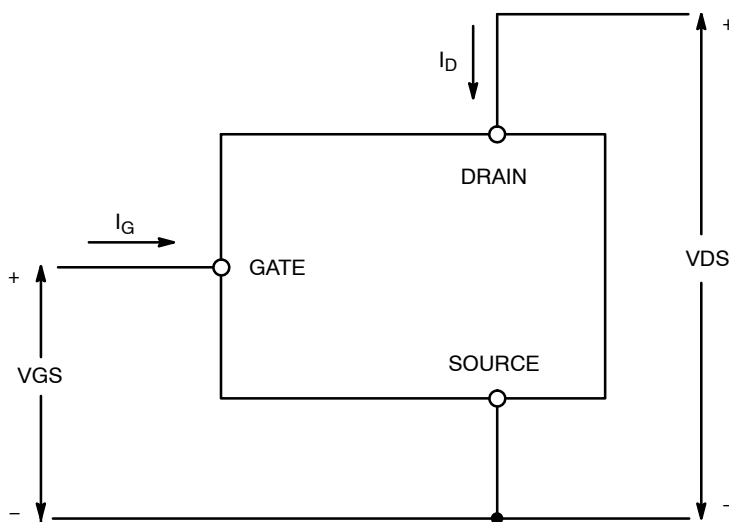


Figure 1. Voltage and Current Convention

NCV8401A, NCV8401B

MOSFET ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|----------------------|----------|------------|----------|------|
| OFF CHARACTERISTICS | | | | | |
| Drain-to-Source Clamped Breakdown Voltage (V _{GS} = 0 Vdc, I _D = 250 μAdc) (V _{GS} = 0 Vdc, I _D = 250 μAdc, T _J = 150°C) (Note 4) | V _{(BR)DSS} | 42 42 | 46 44 | 50 50 | Vdc |
| Zero Gate Voltage Drain Current (V _{DS} = 32 Vdc, V _{GS} = 0 Vdc) (V _{DS} = 32 Vdc, V _{GS} = 0 Vdc, T _J = 150°C) (Note 4) | I _{DSS} | | 1.5 6.5 | 5.0 | μAdc |
| Gate Input Current (V _{GS} = 5.0 Vdc, V _{DS} = 0 Vdc) | I _{GSSF} | | 50 | 100 | μAdc |

ON CHARACTERISTICS

| | | | | | |
|---|---------------------|-----|------------|----------|---------------|
| Gate Threshold Voltage (V _{DS} = V _{GS} , I _D = 1.2 mAdc) Threshold Temperature Coefficient | V _{GS(th)} | 1.0 | 1.8 5.0 | 2.0 | Vdc -mV/°C |
| Static Drain-to-Source On-Resistance (Note 5) (V _{GS} = 10 Vdc, I _D = 5.0 Adc, T _J @ 25°C) (V _{GS} = 10 Vdc, I _D = 5.0 Adc, T _J @ 150°C) (Note 4) | R _{DS(on)} | | 23 43 | 29 55 | mΩ |
| Static Drain-to-Source On-Resistance (Note 5) (V _{GS} = 5.0 Vdc, I _D = 5.0 Adc, T _J @ 25°C) (V _{GS} = 5.0 Vdc, I _D = 5.0 Adc, T _J @ 150°C) (Note 4) | R _{DS(on)} | | 28 50 | 34 60 | mΩ |
| Source-Drain Forward On Voltage (I _S = 5 A, V _{GS} = 0 V) | V _{SD} | | 0.80 | 1.1 | V |

SWITCHING CHARACTERISTICS (Note 4)

| | | | | | |
|---|--|-------------------------------------|------|------|------|
| Turn-ON Time (10% V _{IN} to 90% I _D) | V _{IN} = 0 V to 5 V, V _{DD} = 25 V I _D = 1.0 A, Ext R _G = 2.5 Ω | t _{ON} | 41 | 50 | μs |
| Turn-OFF Time (90% V _{IN} to 10% I _D) | | t _{OFF} | 129 | 150 | |
| Turn-ON Time (10% V _{IN} to 90% I _D) | V _{IN} = 0 V to 10 V, V _{DD} = 25 V, I _D = 1.0 A, Ext R _G = 2.5 Ω | t _{ON} | 16 | 25 | μs |
| Turn-OFF Time (90% V _{IN} to 10% I _D) | | t _{OFF} | 164 | 180 | |
| Slew-Rate ON (80% V _{DS} to 50% V _{DS}) | V _{in} = 0 to 10 V, V _{DD} = 12 V, R _L = 4.7 Ω | -dV _{DS} /dt _{ON} | 1.27 | 2.0 | V/μs |
| Slew-Rate OFF (50% V _{DS} to 80% V _{DS}) | | dV _{DS} /dt _{OFF} | 0.36 | 0.75 | |

SELF PROTECTION CHARACTERISTICS (T_J = 25°C unless otherwise noted)

| | | | | | | |
|------------------------------|---|-----------------------|----------|----------|----------|-----|
| Current Limit | V _{GS} = 5.0 V, V _{DS} = 10 V V _{GS} = 5.0 V, T _J = 150°C (Notes 4, 6) | I _{LIM} | 25 11 | 30 16 | 35 21 | Adc |
| | V _{GS} = 10 V, V _{DS} = 10 V V _{GS} = 10 V, T _J = 150°C (Notes 4, 6) | | 30 18 | 35 25 | 40 28 | |
| Temperature Limit (Turn-off) | V _{GS} = 5.0 V (Notes 4, 6) | T _{LIM(off)} | 150 | 175 | 200 | °C |
| Thermal Hysteresis | V _{GS} = 5.0 V | ΔT _{LIM(on)} | | 15 | | °C |
| Temperature Limit (Turn-off) | V _{GS} = 10 V (Notes 4, 6) | T _{LIM(off)} | 150 | 165 | 185 | °C |
| Thermal Hysteresis | V _{GS} = 10 V | ΔT _{LIM(on)} | | 15 | | °C |

GATE INPUT CHARACTERISTICS (Note 4)

| | | | | | | |
|--|--|------------------|--|-----|-----|----|
| Device ON Gate Input Current | V _{GS} = 5 V I _D = 1.0 A | I _{GON} | | 50 | 100 | μA |
| | V _{GS} = 10 V I _D = 1.0 A | | | 400 | 700 | |
| Current Limit Gate Input Current | V _{GS} = 5 V, V _{DS} = 10 V | I _{GCL} | | 0.1 | 0.5 | mA |
| | V _{GS} = 10 V, V _{DS} = 10 V | | | 0.7 | 1.0 | |
| Thermal Limit Fault Gate Input Current | V _{GS} = 5 V, V _{DS} = 10 V | I _{GTL} | | 0.6 | 1.0 | mA |
| | V _{GS} = 10 V, V _{DS} = 10 V | | | 2.0 | 4.0 | |

ESD ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (Note 4)

| | | | | | |
|---|-----|-------------|--|--|---|
| Electro-Static Discharge Capability Human Body Model (HBM) Machine Model (MM) | ESD | 4000 400 | | | V |
|---|-----|-------------|--|--|---|

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Not subject to production testing.

5. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

6. Refer to Application Note AND8202/D for dependence of protection features on gate voltage.

TYPICAL PERFORMANCE CURVES

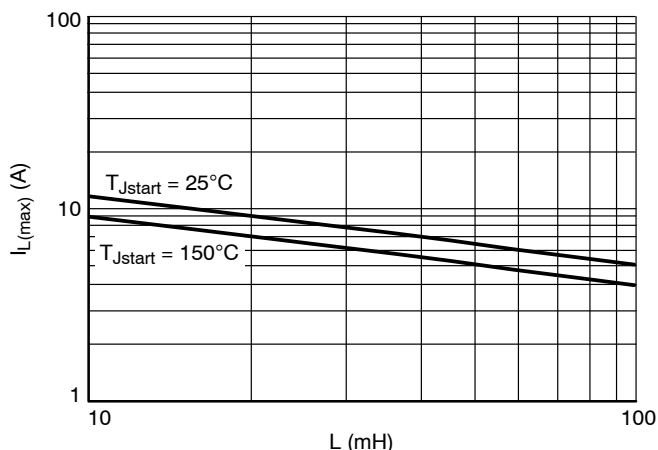


Figure 2. Single Pulse Maximum Switch-off Current vs. Load Inductance

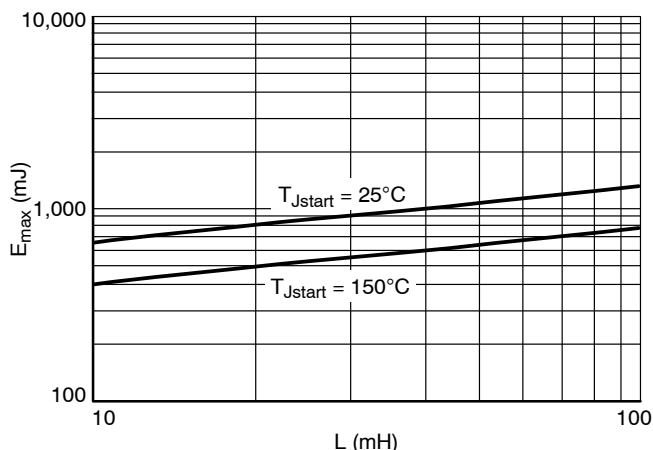


Figure 3. Single Pulse Maximum Switching Energy vs. Load Inductance

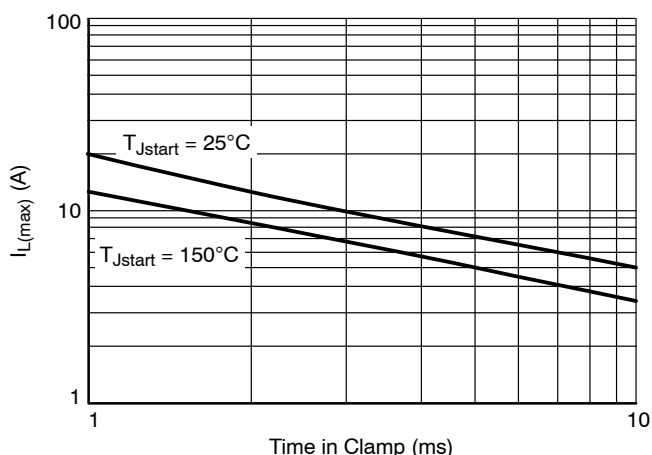


Figure 4. Single Pulse Maximum Inductive Switch-off Current vs. Time in Clamp

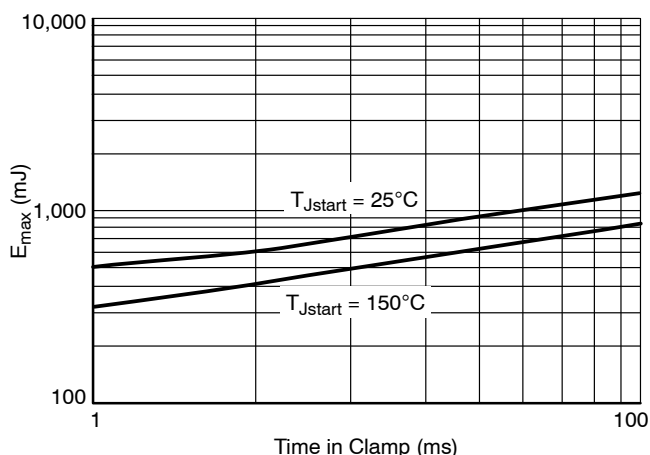


Figure 5. Single Pulse Maximum Inductive Switching Energy vs. Time in Clamp

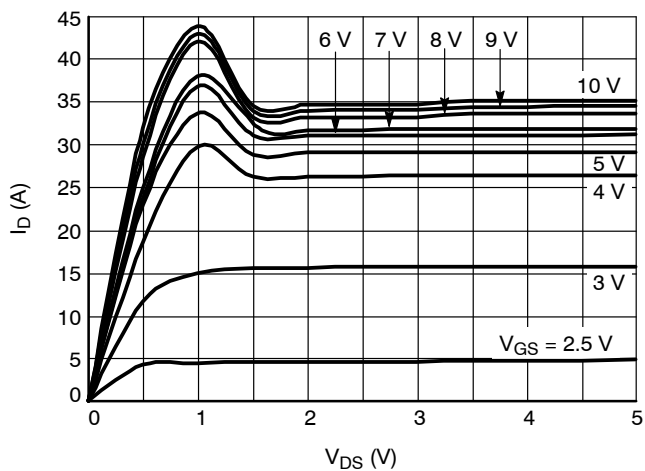


Figure 6. On-state Output Characteristics at 25°C

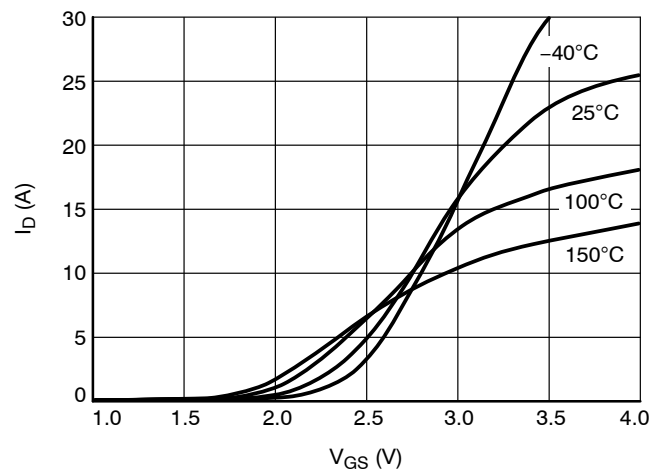


Figure 7. Transfer Characteristics ($V_{DS} = 10\text{ V}$)

TYPICAL PERFORMANCE CURVES

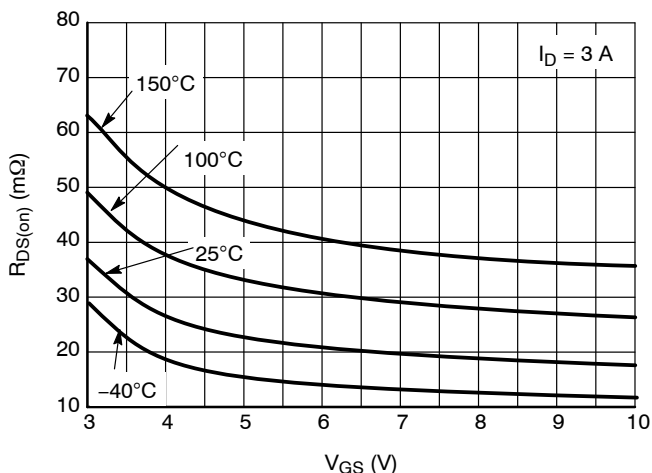


Figure 8. $R_{DS(on)}$ vs. Gate-Source Voltage

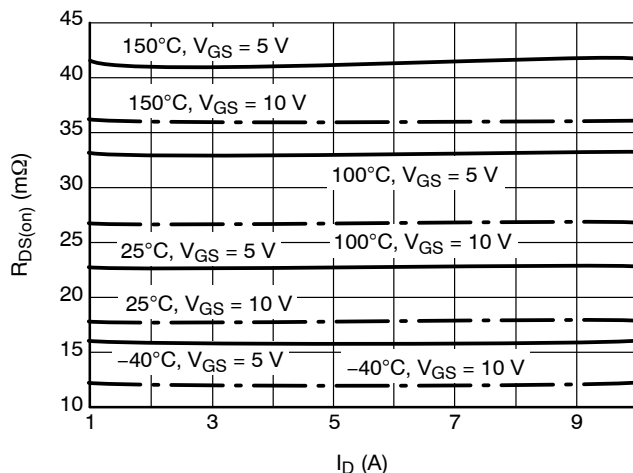


Figure 9. $R_{DS(on)}$ vs. Drain Current

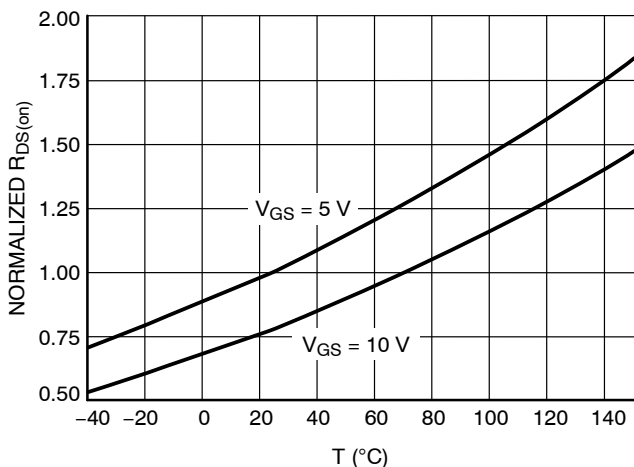


Figure 10. Normalized $R_{DS(on)}$ vs. Temperature ($I_D = 5 A$)

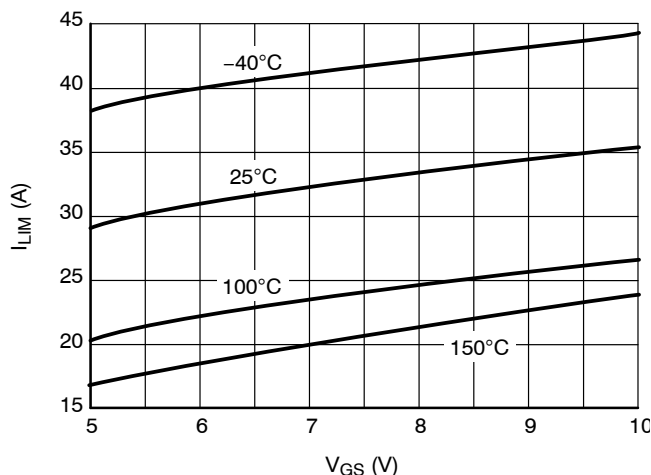


Figure 11. Current Limit vs. Gate-Source Voltage ($V_{DS} = 10 V$)

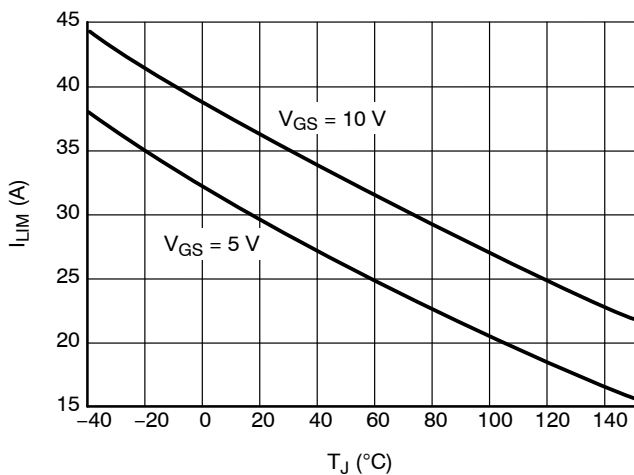


Figure 12. Current Limit vs. Junction Temperature ($V_{DS} = 10 V$)

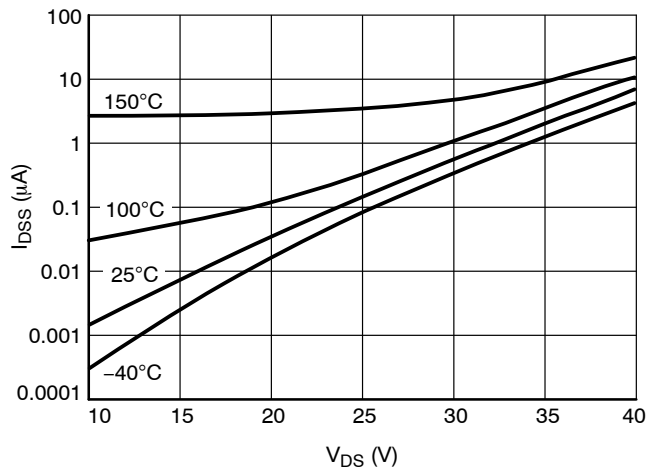


Figure 13. Drain-to-Source Leakage Current ($V_{GS} = 0 V$)

TYPICAL PERFORMANCE CURVES

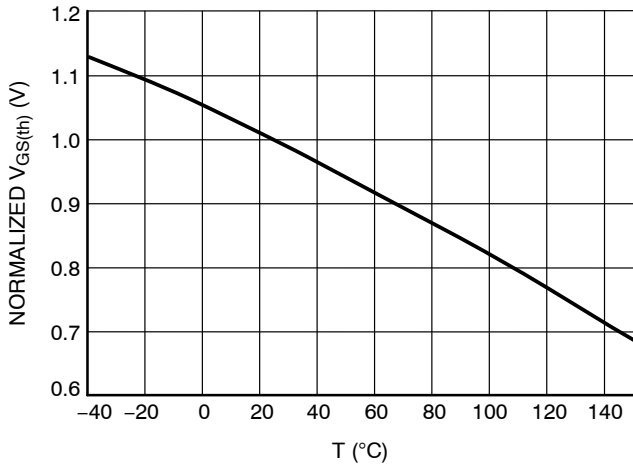


Figure 14. Normalized Threshold Voltage vs. Temperature ($I_D = 1.2$ mA, $V_{DS} = V_{GS}$)

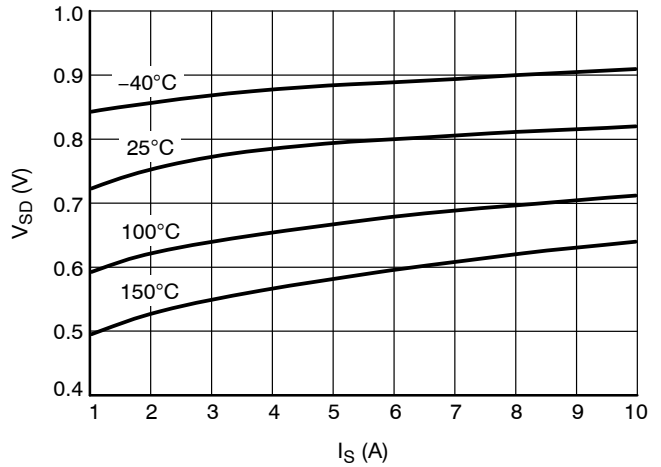


Figure 15. Source-Drain Diode Forward Characteristics ($V_{GS} = 0$ V)

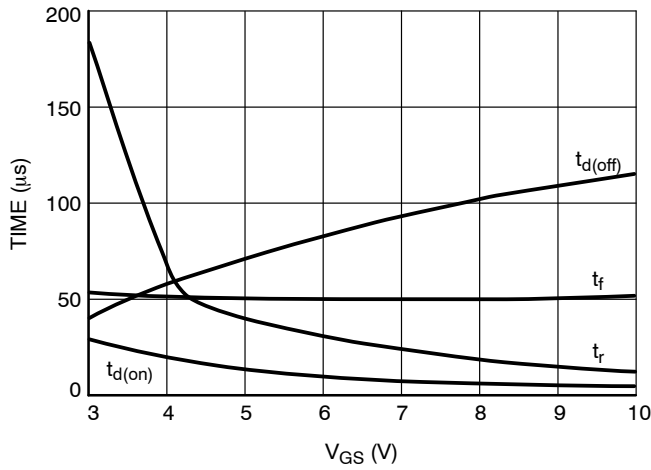


Figure 16. Resistive Load Switching Time vs. Gate-Source Voltage ($V_{DD} = 25$ V, $I_D = 5$ A, $R_G = 0$ Ω)

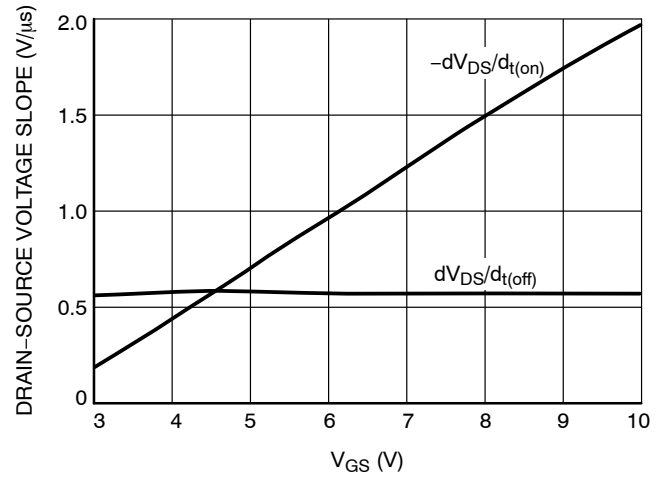


Figure 17. Resistive Load Switching Drain-Source Voltage Slope vs. Gate-Source Voltage ($V_{DD} = 25$ V, $I_D = 5$ A, $R_G = 0$ Ω)

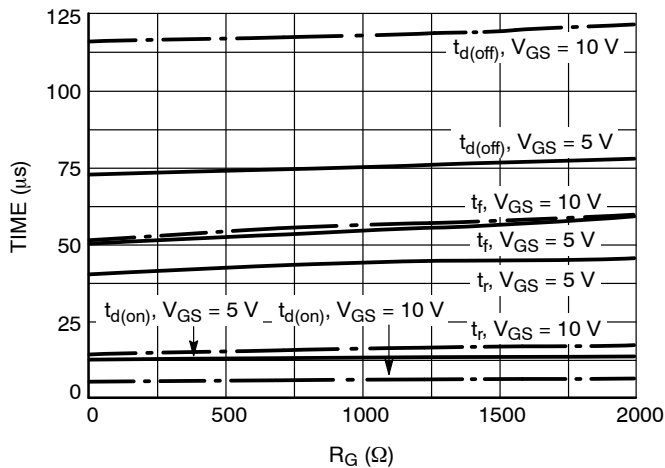


Figure 18. Resistive Load Switching Time vs. Gate Resistance ($V_{DD} = 25$ V, $I_D = 5$ A)

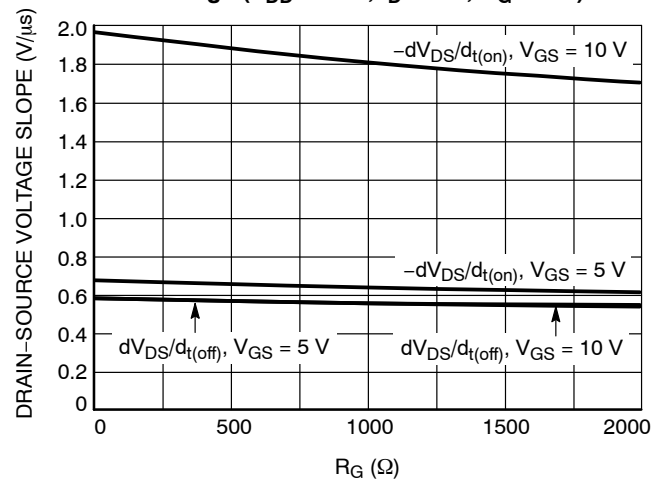


Figure 19. Drain-Source Voltage Slope during Turn On and Turn Off vs. Gate Resistance ($V_{DD} = 25$ V, $I_D = 5$ A)

NCV8401A, NCV8401B

TYPICAL PERFORMANCE CURVES

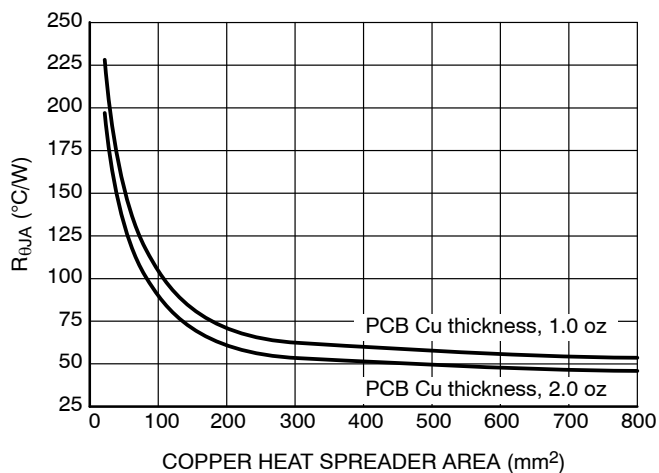


Figure 20. $R_{\theta JA}$ vs. Copper Area

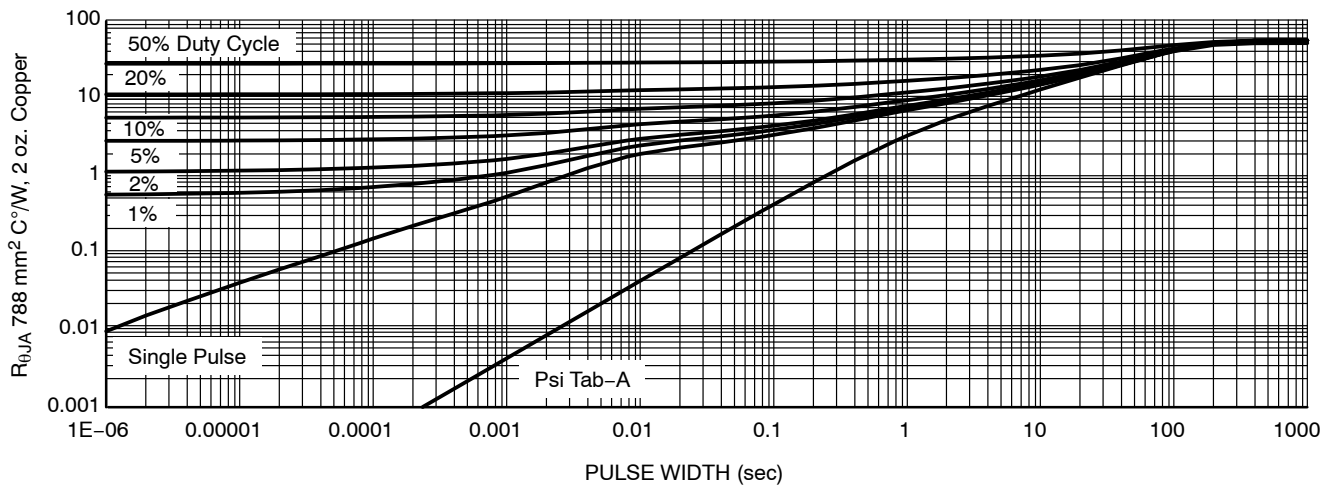


Figure 21. Transient Thermal Resistance

NCV8401A, NCV8401B

TEST CIRCUITS AND WAVEFORMS

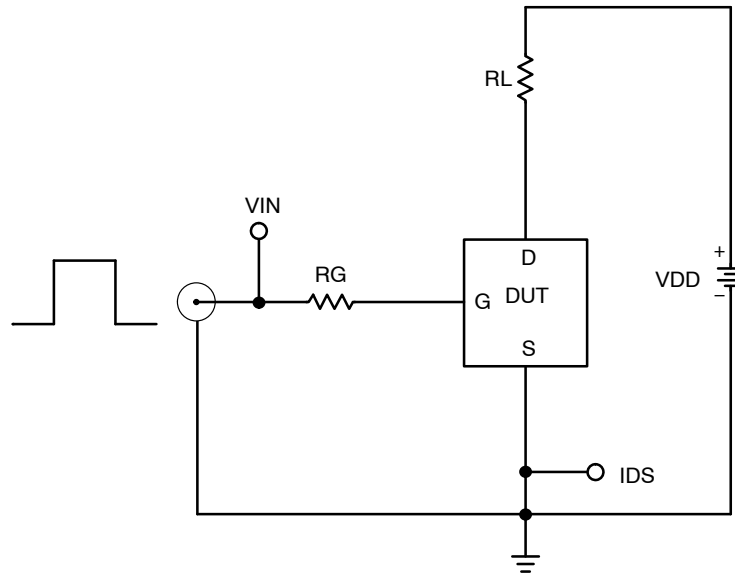


Figure 22. Resistive Load Switching Test Circuit

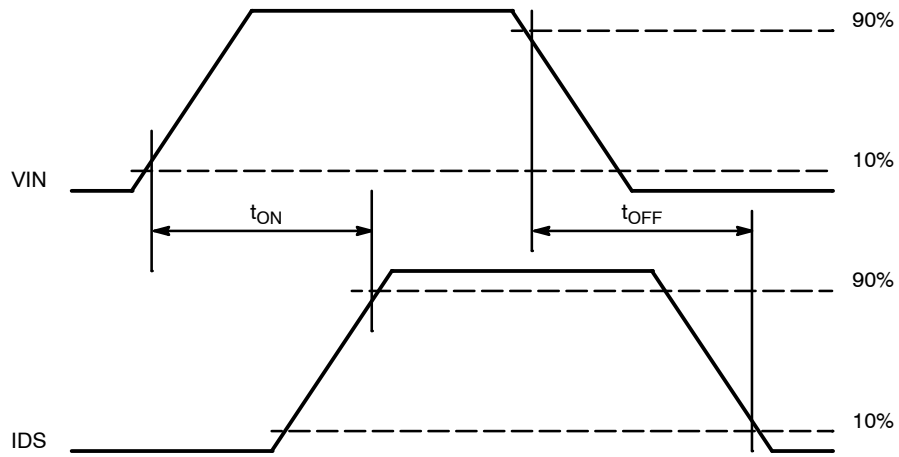


Figure 23. Resistive Load Switching Waveforms

NCV8401A, NCV8401B

TEST CIRCUITS AND WAVEFORMS

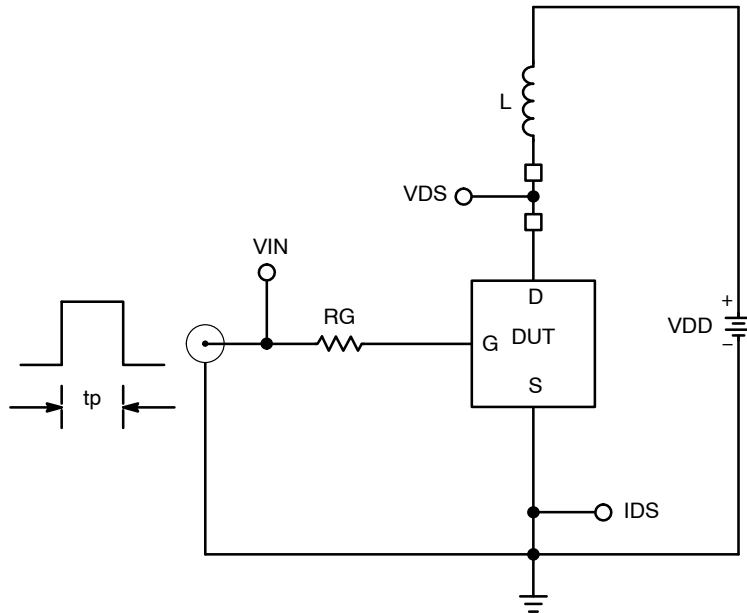


Figure 24. Inductive Load Switching Test Circuit

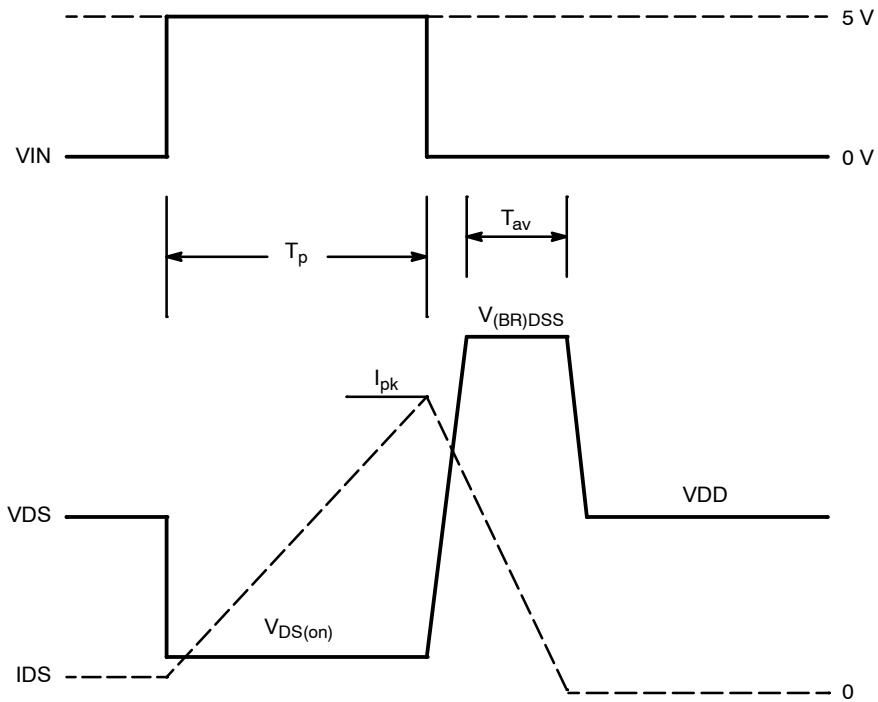


Figure 25. Inductive Load Switching Waveforms

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View NCV8401BDTRKG on WIN SOURCE](#)

 [ON Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management