



**THE DATASHEET OF  
MSCDRI-74-4R7M-RU**





# Mag Layers USA, INC

## Specification Sheet

**P/N : MSCDRI-74-Series-RU**

### Products:

[Molded Power Chokes](#)

[Multilayer Chip Inductors](#)

[Lan Transformer](#)

[RF Passive / Antennas](#)

[Automotive](#)

### Certifications:

[ISO9001](#)

[IATF16949](#)

[ISO14001](#)

[QC080000](#)

### US Office

5406 Bolsa Ave.,  
Huntington Beach, CA 92649  
(714) 898-8377

### Contact Us

[www.maglayersusa.com](http://www.maglayersusa.com)  
[info@maglayersusa.com](mailto:info@maglayersusa.com)

## SCOPE :

This specification applies to the Pb Free high current type SMD inductors for  
MSCDRI-74-SERIES


### PRODUCT IDENTIFICATION

**MSCDRI - 74 - 100 M-RU**

① ② ③ ④

- ① Product Code
- ② Dimensions Code
- ③ Inductance Code
- ④ Tolerance Code

## (1) SHAPES AND DIMENSIONS

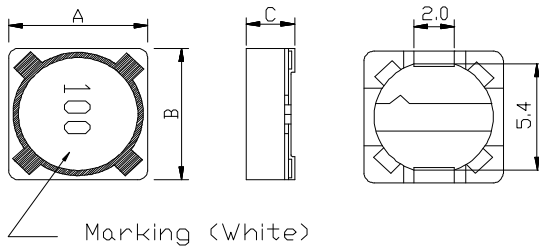

A:  $7.30 \pm 0.5$  mm  
B:  $7.30 \pm 0.5$  mm  
C: 4.60Max. mm

## (2) ELECTRICAL SPECIFICATIONS

### SEE TABLE 1

#### TEST INSTRUMENTS

- L : HP 4284A PRECISION LCR METER (or equivalent)
- RDC : CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)

## (3) CHARACTERISTICS

- (3)-1 Ambient temperature .....  $+60^{\circ}\text{C}$  Max.
- (3)-2 Operate temperature range .....  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$   
(Including self temp. rise)
- (3)-3 Storage temperature range .....  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$



MAG.LAYERS


**TABLE 1**

| MAGLAYERS<br>PT/NO. | Inductance<br>L( $\mu$ H) | Percent<br>Tolerance | Test<br>Frequency | Resistance<br>RDC( $\Omega$ ) Max. | Rated DC Current<br>IDC(A) | Marking |
|---------------------|---------------------------|----------------------|-------------------|------------------------------------|----------------------------|---------|
| MSCDRI-74-R33□-RU   | 0.33                      | N                    | 100kHz/0.25V      | 8.7m                               | 8.5                        | R33     |
| MSCDRI-74-1R0□-RU   | 1.0                       | N                    | 100kHz/0.25V      | 11.1m                              | 6.8                        | 1R0     |
| MSCDRI-74-1R2□-RU   | 1.2                       | M,N                  | 100kHz/0.25V      | 11.1m                              | 6.8                        | 1R2     |
| MSCDRI-74-1R5□-RU   | 1.5                       | N                    | 100kHz/0.25V      | 13.4m                              | 5.7                        | 1R5     |
| MSCDRI-74-1R8□-RU   | 1.8                       | M,N                  | 100kHz/0.25V      | 14.7m                              | 5.0                        | 1R8     |
| MSCDRI-74-2R2□-RU   | 2.2                       | N                    | 100kHz/0.25V      | 14.7m                              | 5.0                        | 2R2     |
| MSCDRI-74-3R3□-RU   | 3.3                       | M,N                  | 100kHz/0.25V      | 21.4m                              | 4.0                        | 3R3     |
| MSCDRI-74-4R7□-RU   | 4.7                       | M,N                  | 100kHz/0.25V      | 31.0m                              | 3.4                        | 4R7     |
| MSCDRI-74-5R6□-RU   | 5.6                       | M,N                  | 100kHz/0.25V      | 33.5m                              | 3.0                        | 5R6     |
| MSCDRI-74-6R8□-RU   | 6.8                       | M,N                  | 100kHz/0.25V      | 35m                                | 2.3                        | 6R8     |
| MSCDRI-74-8R2□-RU   | 8.2                       | M,N                  | 100kHz/0.25V      | 42m                                | 2.1                        | 8R2     |
| MSCDRI-74-100□-RU   | 10                        | M                    | 100kHz/0.25V      | 49m                                | 1.84                       | 100     |
| MSCDRI-74-120□-RU   | 12                        | M                    | 100kHz/0.25V      | 58m                                | 1.71                       | 120     |
| MSCDRI-74-150□-RU   | 15                        | M                    | 100kHz/0.25V      | 81m                                | 1.47                       | 150     |
| MSCDRI-74-180□-RU   | 18                        | M                    | 100kHz/0.25V      | 91m                                | 1.31                       | 180     |
| MSCDRI-74-220□-RU   | 22                        | M                    | 100kHz/0.25V      | 0.11                               | 1.23                       | 220     |
| MSCDRI-74-270□-RU   | 27                        | M                    | 100kHz/0.25V      | 0.15                               | 1.12                       | 270     |
| MSCDRI-74-330□-RU   | 33                        | M                    | 100kHz/0.25V      | 0.20                               | 0.96                       | 330     |
| MSCDRI-74-390□-RU   | 39                        | M                    | 100kHz/0.25V      | 0.23                               | 0.91                       | 390     |
| MSCDRI-74-470□-RU   | 47                        | M                    | 100kHz/0.25V      | 0.26                               | 0.88                       | 470     |
| MSCDRI-74-560□-RU   | 56                        | M                    | 100kHz/0.25V      | 0.35                               | 0.75                       | 560     |
| MSCDRI-74-680□-RU   | 68                        | M                    | 100kHz/0.25V      | 0.38                               | 0.69                       | 680     |
| MSCDRI-74-820□-RU   | 82                        | M                    | 100kHz/0.25V      | 0.43                               | 0.61                       | 820     |
| MSCDRI-74-101□-RU   | 100                       | M                    | 100kHz/0.25V      | 0.61                               | 0.60                       | 101     |
| MSCDRI-74-121□-RU   | 120                       | M                    | 100kHz/0.25V      | 0.66                               | 0.52                       | 121     |
| MSCDRI-74-151□-RU   | 150                       | M                    | 100kHz/0.25V      | 0.88                               | 0.46                       | 151     |
| MSCDRI-74-181□-RU   | 180                       | M                    | 100kHz/0.25V      | 0.98                               | 0.42                       | 181     |
| MSCDRI-74-221□-RU   | 220                       | M                    | 100kHz/0.25V      | 1.17                               | 0.36                       | 221     |
| MSCDRI-74-271□-RU   | 270                       | M                    | 100kHz/0.25V      | 1.64                               | 0.34                       | 271     |
| MSCDRI-74-331□-RU   | 330                       | M                    | 100kHz/0.25V      | 1.86                               | 0.32                       | 331     |
| MSCDRI-74-391□-RU   | 390                       | M                    | 100kHz/0.25V      | 2.85                               | 0.29                       | 391     |
| MSCDRI-74-471□-RU   | 470                       | M                    | 100kHz/0.25V      | 3.01                               | 0.26                       | 471     |
| MSCDRI-74-561□-RU   | 560                       | M                    | 100kHz/0.25V      | 3.62                               | 0.23                       | 561     |
| MSCDRI-74-681□-RU   | 680                       | M                    | 100kHz/0.25V      | 4.63                               | 0.22                       | 681     |
| MSCDRI-74-821□-RU   | 820                       | M                    | 100kHz/0.25V      | 5.20                               | 0.20                       | 821     |
| MSCDRI-74-102□-RU   | 1000                      | M                    | 100kHz/0.25V      | 6.00                               | 0.18                       | 102     |


※ □ specify the inductance tolerance, M( $\pm$ 20%), N( $\pm$ 30%)

※ IDC : Based on inductance change ( $\Delta$ L/Lo: drop 25% Max.) @ambient temperature 25°C and

Based on temperature rise ( $\Delta$ T : 40°C Typ.)



## (4) RELIABILITY TEST METHOD MECHANICAL
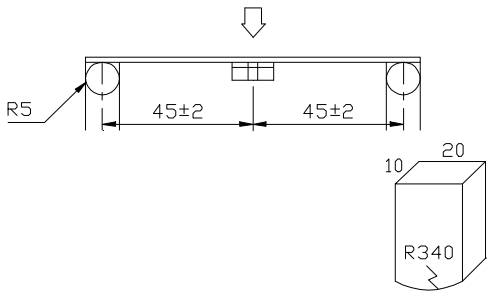
| TEST ITEM         | SPECIFICATION  | TEST DETAILS   |
|-------------------|--|--|
| Substrate bending | $\Delta L/L_0 \leq \pm 5\%$<br><br>There shall be no mechanical damage or electrical damage. | <p>The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3mm.(keep time 30 seconds)<br/>           PCB dimension shall the page 7/9</p> <p>F(Pressurization)</p>  <p>PRESSURE ROD<br/>figure-1</p>  |
| Vibration         | $\Delta L/L_0 \leq \pm 5\%$<br><br>There shall be no mechanical damage.                      | <p>The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated should be applied to the 3 directions (X,Y,Z) for 2 hours each. (A total of 6 hours)</p>  |
| Solderability     | New solder<br>More than 90%  | <p>Flux (rosin, isopropyl alcohol{JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±5°C.</p> <p>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.</p> |



## MECHANICAL

| TEST ITEM                                       | SPECIFICATION                         |   |
|---|---------------------------------------|---|
| Resistance to Soldering heat (reflow soldering) | There shall be no damage or problems. | <p style="text-align: center;"><b>Temperature profile of reflow soldering</b></p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time.</p> <p>The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.</p> |

## ELECTRICAL

| TEST ITEM                    | SPECIFICATION  | TEST DETAILS   |
|------------------------------|--|--|
| Insulation resistance        | There shall be no other damage or problems.  | DC 100V voltage shall be applied across this sample of top surface and the terminal.<br>The insulation resistance shall be more than $1 \times 10^8 \Omega$ .  |
| Dielectric withstand voltage | There shall be no other damage or problems.  | AC 100V voltage shall be applied for 1 minute across the top surface and the terminal of this sample   |
| Temperature characteristics  | $\Delta L/L20^\circ\text{C} \leq \pm 10\%$<br>$0 \sim 2000 \text{ ppm}/^\circ\text{C}$ | The test shall be performed after the sample has stabilized in an ambient temperature of $-20$ to $+85^\circ\text{C}$ , and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L/L20^\circ\text{C} \leq \pm 10\%$ . |



## ENVIROMENT CHARACTERISTICS


| TEST ITEM   | SPECIFICATION  |   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
|---|--|---|--|-------------|----------|---|--|---------|---|----------------------|-----------|---|---|---------|---|----------------------|-----------|
| High temperature storage  | $\Delta L/Lo \leq \pm 5\%$<br><br>There shall be no mechanical damage.       | The sample shall be left for $96 \pm 4$ hours in an atmosphere with a temperature of $85 \pm 2^\circ\text{C}$ and a normal humidity.<br><br>Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| Low temperature storage   | $\Delta L/Lo \leq \pm 5\%$<br><br>There shall be no mechanical damage.       | The sample shall be left for $96 \pm 4$ hours in an atmosphere with a temperature of $-25 \pm 3^\circ\text{C}$ .<br><br>Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| Change of temperature   | $\Delta L/Lo \leq \pm 5\%$<br><br>There shall be no other damage of problems | The sample shall be subject to 5 continuous cycles, such as shown in the table 2 below and then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made.<br><br><div style="text-align: center;">                         table 2<br/> <table border="1" style="margin: auto;"> <thead> <tr> <th></th> <th style="text-align: center;">Temperature</th> <th style="text-align: center;">Duration</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;"><math>-25 \pm 3^\circ\text{C}</math><br/>(Thermostat No.1)</td> <td style="text-align: center;">30 min.</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Standard atmospheric</td> <td style="text-align: center;">No.1→No.2</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;"><math>85 \pm 2^\circ\text{C}</math><br/>(Thermostat No.2)</td> <td style="text-align: center;">30 min.</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Standard atmospheric</td> <td style="text-align: center;">No.2→No.1</td> </tr> </tbody> </table> </div> |  | Temperature | Duration | 1 | $-25 \pm 3^\circ\text{C}$<br>(Thermostat No.1) | 30 min. | 2 | Standard atmospheric | No.1→No.2 | 3 | $85 \pm 2^\circ\text{C}$<br>(Thermostat No.2) | 30 min. | 4 | Standard atmospheric | No.2→No.1 |
|   | Temperature  | Duration  |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| 1   | $-25 \pm 3^\circ\text{C}$<br>(Thermostat No.1)                               | 30 min.   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| 2   | Standard atmospheric   | No.1→No.2   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| 3   | $85 \pm 2^\circ\text{C}$<br>(Thermostat No.2)                                | 30 min.   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| 4   | Standard atmospheric   | No.2→No.1   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| Moisture storage  | $\Delta L/Lo \leq \pm 5\%$<br><br>There shall be no mechanical damage.       | The sample shall be left for $96 \pm 4$ hours in a temperature of $40 \pm 2^\circ\text{C}$ and a humidity(RH) of 90~95%.<br><br>Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour.   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |
| Test conditions :<br><p style="text-align: center;">The sample shall be reflow soldered onto the printed circuit board in every test.</p> |  |   |  |             |          |   |  |         |   |                      |           |   |   |         |   |                      |           |

## (5) LAND DIMENSION (Ref.)


PCB: GLASS EPOXY  $t=1.6\text{mm}$

### (5)-1 LAND PATTERN DIMENSIONS

(STANDARD PATTERN) Unit : mm




### (5)-2 SUBSTRATE BENDING TEST BENDING TEST BOARD

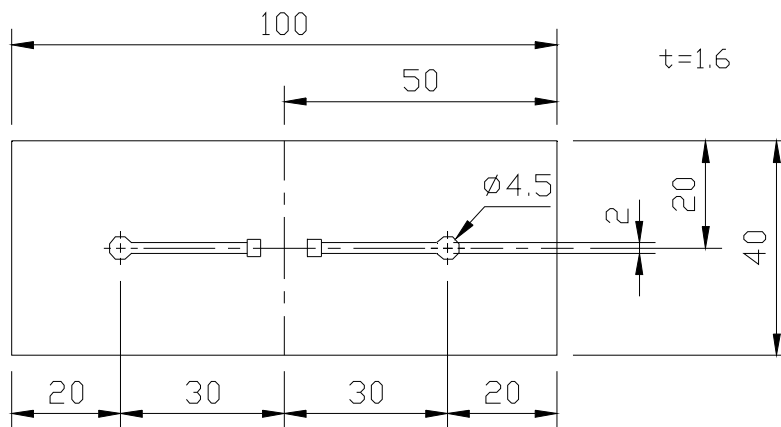


## (6) PACKAGING


### (6)-1 CARRIER TAPE DIMENSIONS (mm)

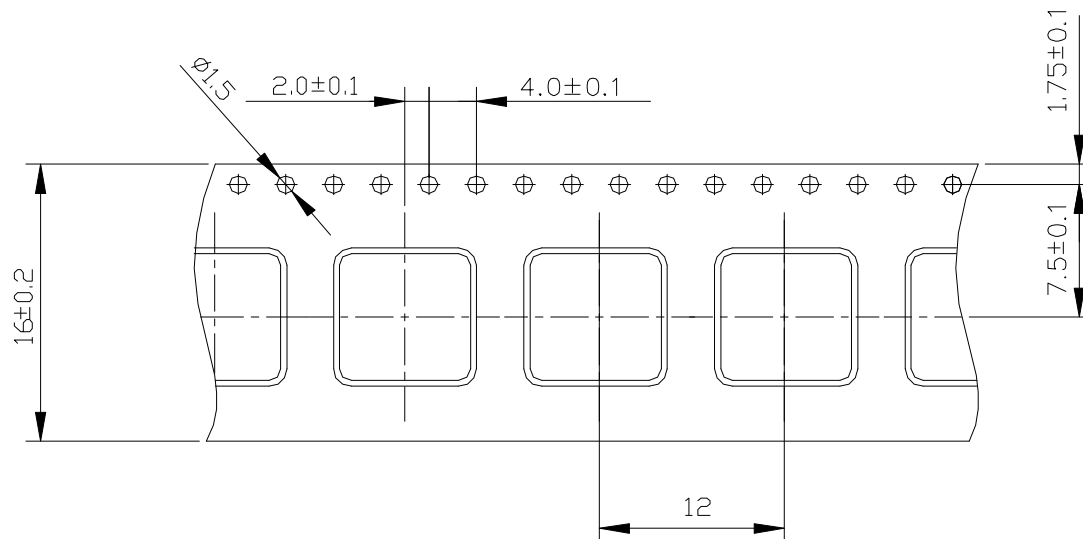

### (6)-2 TAPING DIMENSIONS (mm)

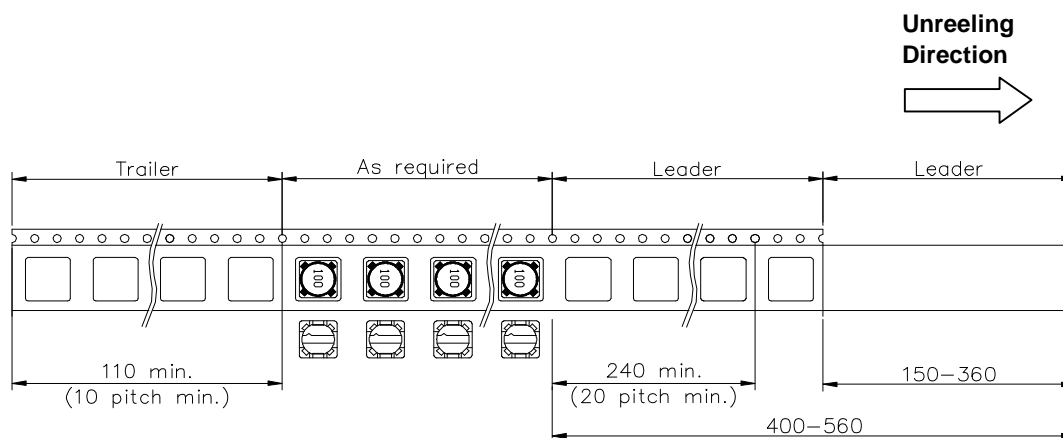

**(6)-3 REEL DIMENSIONS (mm)**

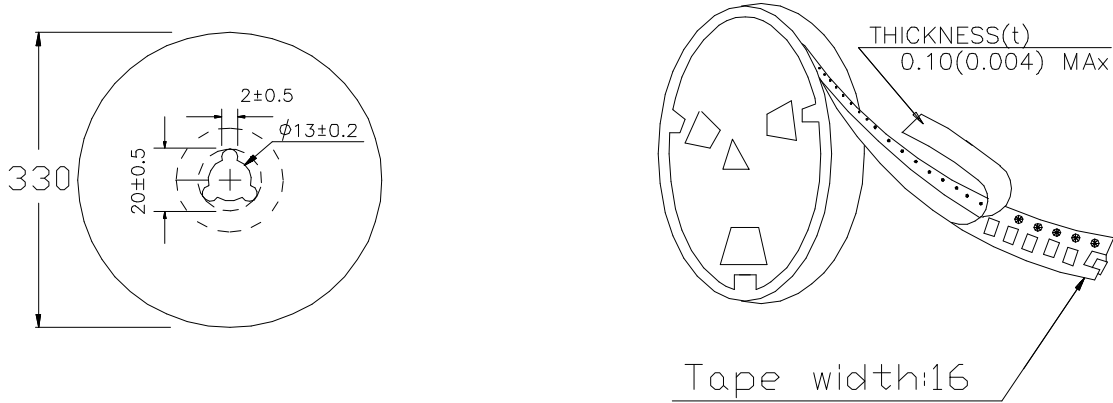



**(6)-4 QUANTITY**

1000pcs/Reel

The products are packaged so that no damage will be sustained.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View MSCDRI-74-4R7M-RU on WIN SOURCE](#)
-  [Mag Layers Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management