




THE DATASHEET OF H6400NL



NOTE: UNLESS OTHERWISE SPECIFIED

NOTICE:	THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT. ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER.
RoHS	


- 1.
2. HEADER: THERMOPLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
3. SOLDERABILITY: CONFORMS TO ANSI/J-STD-002, IPC/EIS J-STD-003A.
4. OPERATING TEMPERATURE: 0°C TO +70 °C
5. STORAGE TEMPERATURE: -20°C TO +125°C
6. JEDEC MOISTURE: LEVEL 1
7. DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.
.XX= ±0.01 [±0.25]
.XXX= ±0.005 [±0.13]
8. REVISION: MX1, MX2, ARE PRELIMINARY.



© Copyright, 2012. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (04/

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION MDL, QUAD, 1GPP, 1:1, SMT	PS DRAWING PS-2435.001-D	SHEET: 1
--	--	-----------------------------	-------------

ELECTRICAL CHARACTERISTICS A
(FOR REFERENCE ONLY. USE

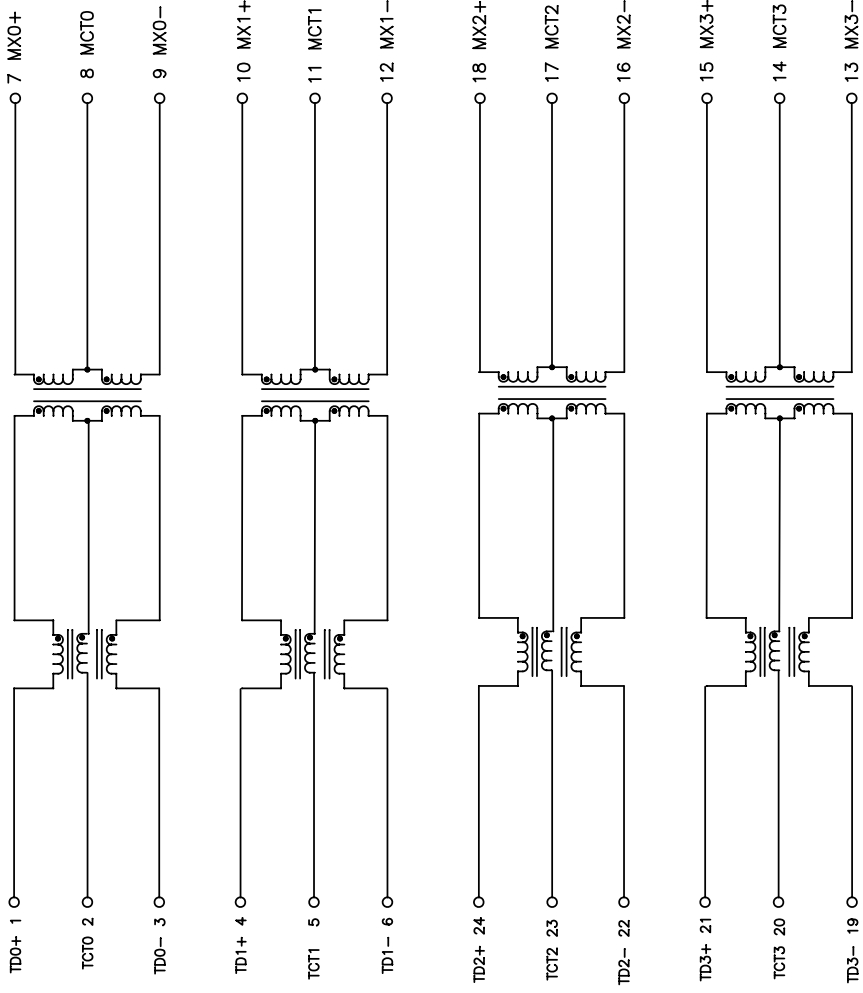

SCHEMATIC



NOTE: f IS FREQUENCY IN MHZ.

© Copyright, 2012. Pulse Electronics Corp. All rights reserved. Drawing specifications subject to change without notice. (04/


PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT DESCRIPTION	PS DRAWING	SHEET:
	MDL,QUAD,1GPP, 1:1,SMT	PS-2435.001-D	2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View H6400NL on WIN SOURCE](#)
-  [Pulse Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management