



**THE DATASHEET OF  
RP10-2405SE/P/M1**



# Features

- 2:1 input voltage range
- 1.6kVDC isolation
- UL60950-1 certified
- Efficiency up to 87%
- Fixed operation frequency
- Six-sided continuous shield

# Regulated Converter



# RP10-E

10 Watt  
2" x 1"



Single and Dual Output



UL60950-1 certified  
EN55032 compliant

## Description

The RP10-E series DC/DC converters are certified to UL 60950-1 and cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 1" package meets military standards for thermal shock and vibration tolerance and is available with an optional remote on/off control pin. This series is also available with the /M1 and /M2 option which is particularly suitable for extended temperature range applications.


## Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input <sup>(1)</sup> Current [mA]	Efficiency <sup>(1)</sup> typ. [%]	Max. Capacitive Load <sup>(2)</sup> [µF]
RP10-123.3SE <sup>(3,4)</sup>	9-18	3.3	2000	688	80	6800
RP10-1205SE <sup>(3,4)</sup>	9-18	5	2000	1029	81	4700
RP10-1212SE <sup>(3,4)</sup>	9-18	12	830	988	84	690
RP10-1215SE <sup>(3,4)</sup>	9-18	15	670	997	84	470
RP10-243.3SE <sup>(3,4)</sup>	18-36	3.3	2000	344	80	6800
RP10-2405SE <sup>(3,4)</sup>	18-36	5	2000	508	82	4700
RP10-2412SE <sup>(3,4)</sup>	18-36	12	830	494	84	690
RP10-2415SE <sup>(3,4)</sup>	18-36	15	670	499	84	470
RP10-483.3SE <sup>(3,4)</sup>	36-75	3.3	2000	172	80	6800
RP10-4805SE <sup>(3,4)</sup>	36-75	5	2000	248	84	4700
RP10-4812SE <sup>(3,4)</sup>	36-75	12	830	241	86	690
RP10-4815SE <sup>(3,4)</sup>	36-75	15	670	241	87	470
RP10-1205DE <sup>(3,4)</sup>	9-18	±5	±1000	992	84	±680
RP10-1212DE <sup>(3,4)</sup>	9-18	±12	±416	1002	83	±330
RP10-1215DE <sup>(3,4)</sup>	9-18	±15	±333	991	84	±110
RP10-2405DE <sup>(3,4)</sup>	18-36	±5	±1000	502	83	±680
RP10-2412DE <sup>(3,4)</sup>	18-36	±12	±416	489	85	±330
RP10-2415DE <sup>(3,4)</sup>	18-36	±15	±333	496	84	±110
RP10-4805DE <sup>(3,4)</sup>	36-75	±5	±1000	248	84	±680
RP10-4812DE <sup>(3,4)</sup>	36-75	±12	±416	242	86	±330
RP10-4815DE <sup>(3,4)</sup>	36-75	±15	±333	245	85	±110

### Notes:

- Note1: Maximum values at nominal input voltage and full load  
 Note2: Max. Cap load is tested at minimum input and constant resistive load

## Model Numbering

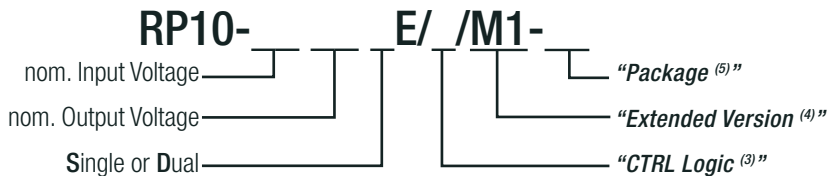

### Notes:

- Note3: no suffix for standard part without CTRL pin  
 add suffix "P" for CTRL function with positive logic (1=ON, 0=OFF)  
 add suffix "N" for CTRL function with negative logic (0=ON, 1=OFF)  
 Note4: add suffix "/M1" for higher efficiencies and extended temperature range  
 Note5: add suffix "-HC" for premounted Heat-sink with clips

### Ordering Examples

- RP10-1205SE/P = 12V input, 5V output, single, positive logic CTRL pin  
 RP10-4805DE/M1-HC = 48V input, ±5V output, dual, extended temp. range, Heat-sink premounted

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)



**BASIC CHARACTERISTICS**

Parameter	Condition		Min.	Typ.	Max.
Internal Input Filter			Pi-Type		
Input Voltage Range	nom. Vin = 12VDC nom. Vin = 24VDC nom. Vin = 48VDC		9VDC 18VDC 36VDC	12VDC 24VDC 48VDC	18VDC 36VDC 75VDC
Input Surge Voltage	100ms max.	nom. Vin = 12VDC nom. Vin = 24VDC nom. Vin = 48VDC			36VDC 50VDC 100VDC
Minimum Load <sup>(6)</sup>			10%		
Start-up Time	Power up			20ms	
ON/OFF CTRL <sup>(7)</sup> refer to "ON/OFF CTRL"	Positive Logic	DC-DC ON DC-DC OFF	Open or 3.5VDC < V <sub>CTRL</sub> < 12VDC Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC		
	Negative Logic	DC-DC ON DC-DC OFF	Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC Open or 3.5VDC < V <sub>CTRL</sub> < 12VDC		
Input Current of CTRL pin	drive current	I <sub>CTRL</sub>	-0.5mA		+1.0mA
Standby Current	DC-DC OFF	I <sub>in</sub>		20mA	
Internal Operating Frequency			270kHz	300kHz	330kHz
Output Ripple and Noise	20MHz BW	Single Dual		50mVp-p 75mVp-p	
Input Reflected Ripple Current <sup>(8)</sup>				30mA <sub>p-p</sub>	

**Notes:**

- Note6: The RP10-E series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification
- Note7: If no suffix is specified, the control pin will be absent. If fitted, the ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin
- Note8: Simulated source impedance of 12µH. 12µH inductor in series with +Vin



**RP10-1205SE**

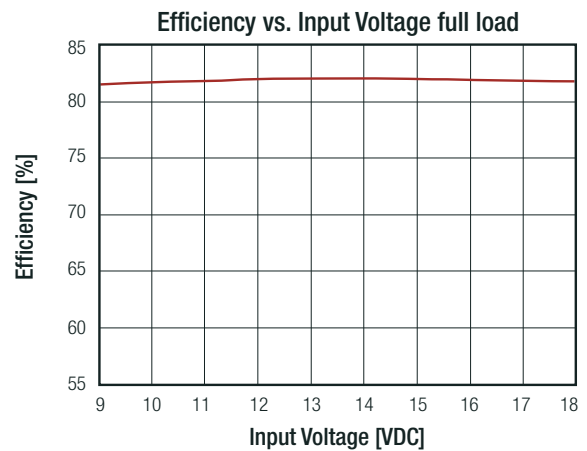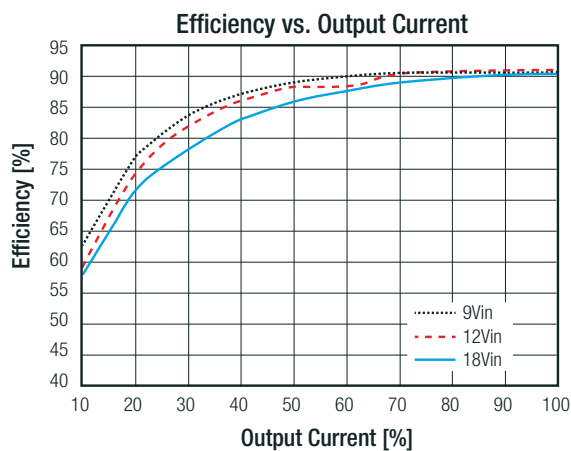



continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)


**RP10-2405SE**

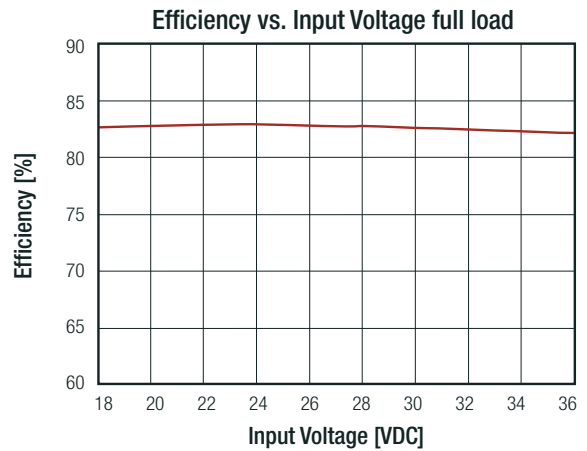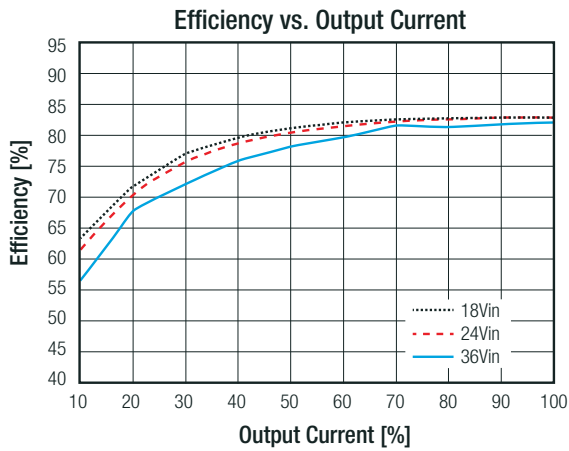

**RP10-4805SE**

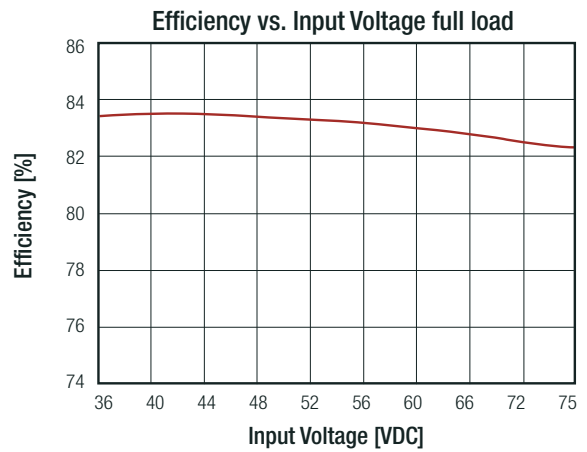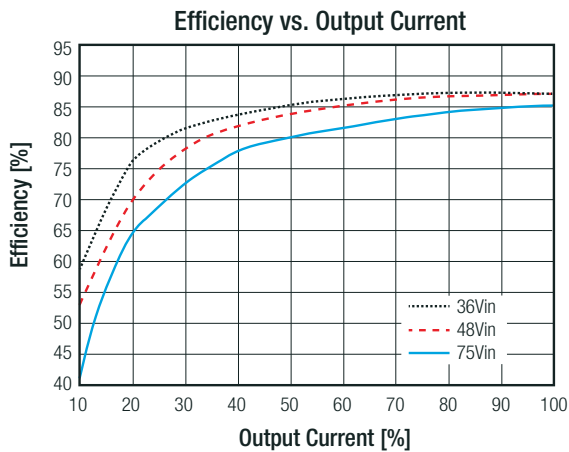

**ON/OFF CTRL**

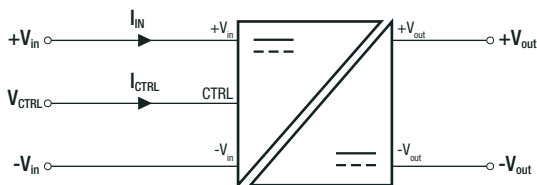

Positive Logic	DC-DC ON	Open or $3.5\text{VDC} < V_{CTRL} < 15\text{VDC}$
	DC-DC OFF	Short or $0\text{VDC} < V_{CTRL} < 1.2\text{VDC}$
Negativ Logic	DC-DC ON	Short or $0\text{VDC} < V_{CTRL} < 1.2\text{VDC}$
	DC-DC OFF	Open or $3.5\text{VDC} < V_{CTRL} < 15\text{VDC}$

**REGULATIONS**

Parameter	Condition		Value
Output Accuracy			±1.0%
Line Regulation	low line to high line, full load		±0.2%
Load Regulation	0% to 100% load	Single	±0.5%
		Dual	±1.0%
Cross Regulation	asymmetrical 25%<>100% load		±5.0%
Transient Response Recovery Time	25% load step change		250µs typ.

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

PROTECTIONS			
Parameter	Condition		Value
Short Circuit Protection (SCP)			continuous, automatic recovery
Over Voltage Protection (OVP)	zener diode clamp	3.3Vout	3.9VDC typ.
		5Vout	6.2VDC typ.
		12Vout	15VDC typ.
		15Vout	18VDC typ.
Over Load Protection (OLP)	% of lout rated		150% typ.

continued on next page

PROTECTIONS			
Parameter	Condition		Value
Isolation Voltage <sup>(9)</sup>	I/P to O/P		1.6kVDC/ 1 minute
	I/P to O/P to case		1.6kVDC/ 1 minute
Isolation Resistance	Viso= 500VDC		1GΩ min.
Isolation Capacitance			300pF max.



**Notes:**

Note9: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note10: This power module is not internally fused. An input line fuse must always be used



ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	with derating	Standard	-25°C to +100°C
		with suffix "M1"	-40°C to +100°C
Maximum Case Temperature			+105°C
Temperature Coefficient			±0.02%/K max.
Thermal Impedance	@ natural convection 0.1m/s, vertical direction	without heat-sink	12K/W
		with heat-sink	10K/W
Operating Humidity	non-condensing		5% - 95% RH
Thermal Shock			according to MIL-STD-810F
Vibration			according to MIL-STD-810F
MTBF	MIL-HDBK-217F, G.B.		3342 x 10 <sup>3</sup> hours

**Derating Graph <sup>(11)</sup>**

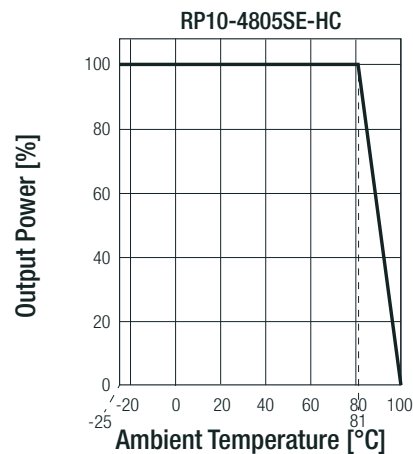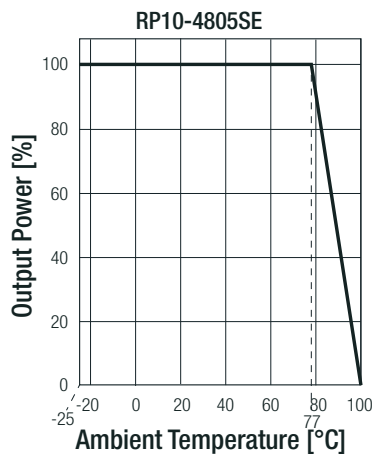

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

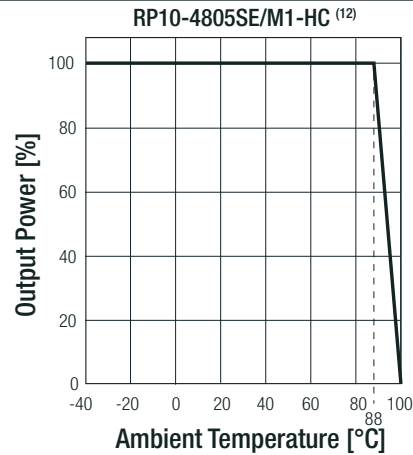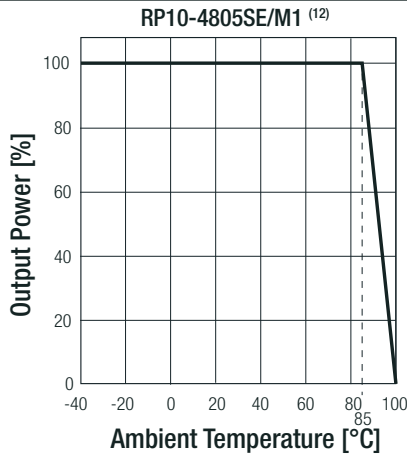

**Notes:**


- Note11: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact RECOM Techsupport for detailed information
- Note12: "/M1" version is more efficient and can therefore operate in a more extensive temperature range than standard version

SAFETY AND CERTIFICATIONS		
Certificate Type (Safety)	Condition	Standard
Information Technology Equipment, General Requirements for Safety	E196683	UL60950-1, 2nd Edition, 2011 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition, 2011
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS2+		RoHS-2011/65/EU + AM-2015/863
EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class A and B
ESD Electrostatic discharge immunity test	Air ±8kV and Contact ±6kV	EN61000-4-2, Criteria B
Radiated, radio-frequency, electromagnetic field immunity test	10 V/m	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity <sup>(13)</sup>	±2kV	EN61000-4-4, Criteria B
Surge Immunity <sup>(13)</sup>	±2kV	EN61000-4-5, Criteria B
Immunity to conducted disturbances, induced by radio-frequency fields	10 Vr.m.s	EN61000-4-6, Criteria A
Power Magnetic Field Immunity	100A/m continuous; 1000A/m 1s	EN61000-4-8, Criteria A
<b>Notes:</b>		
Note13: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5 Recom suggests Nippon chemi-con KY series 220µF/100V		

continued on next page


Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

### EMC Filtering Suggestions according to EN55032

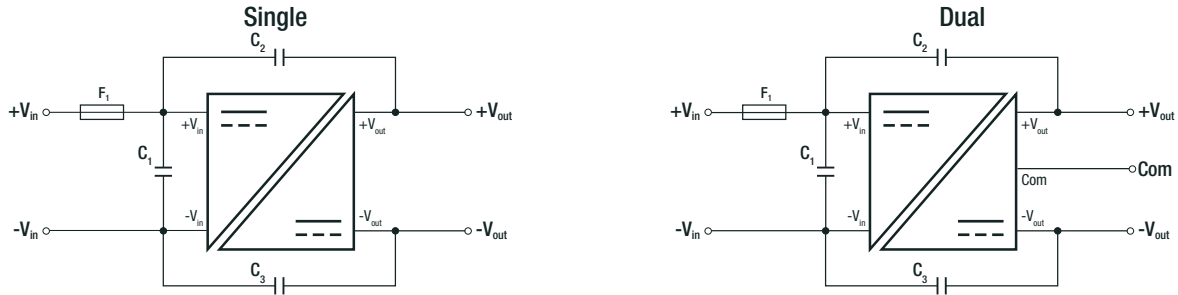

#### Component List Class A

MODEL	C1	C2	C3
RP10-12xxSE, RP10-12xxDE	2.2µF/25V, 1206 MLCC	1000pF/2kV, 1808 MLCC	1000pF/2kV, 1808 MLCC
RP10-24xxSE, RP10-24xxDE	N/A	1000pF/2kV, 1808 MLCC	1000pF/2kV, 1808 MLCC
RP10-48xxSE, RP10-48xxDE	N/A	1000pF/2kV, 1808 MLCC	1000pF/2kV, 1808 MLCC

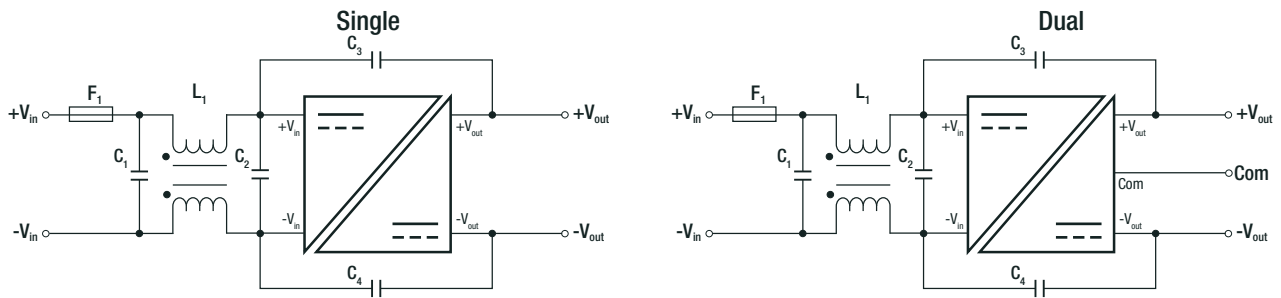

#### Component List Class B

MODEL	C1	C2	C3/C4	L1
RP10-12xxSE	3.3µF/50V	N/A	1000pF/2kV	CMC: 325µH
RP10-12xxDE	1812 MLCC	N/A	1808 MLCC	ref: WE 744290321 ref.: CMC-06
RP10-24xxSE	2.2µF/50V	N/A	1000pF/2kV	CMC: 325µH
RP10-24xxDE	1812 MLCC	N/A	1808 MLCC	ref: WE 744290321 ref.: CMC-06
RP10-48xxSE	2.2µF/100V	2.2µF/100V	1000pF/2kV	CMC: 325µH
RP10-48xxDE	1812 MLCC	1812 MLCC	1808 MLCC	ref: WE 744290321 ref.: CMC-06




### DIMENSIONS AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case	nickel coated copper
	base	non-conductive black plastic
	potting	epoxy (UL94 V-0)
Dimensions (LxWxH)	without Heat-sink	50.8 x 25.4 x 10.2mm
	with Heat-sink	56.8 x 25.4 x 16.8mm
Weight	without Heat-sink	27g
	with Heat-sink	37.89g



continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

**Dimension Drawing (mm)**

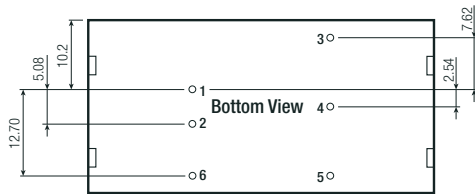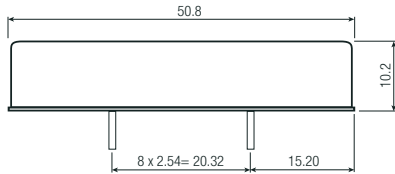

**Recommended Footprint Details**



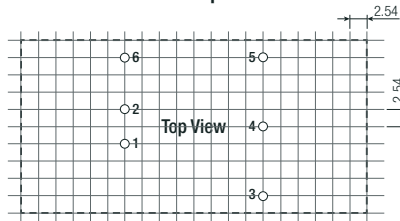


**Pinning Information**

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	no Pin	Com
5	-Vout	-Vout
6	CTRL <sup>(3)</sup>	CTRL <sup>(3)</sup>

Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm

**Dimension Drawing with Heat-sink (mm)**

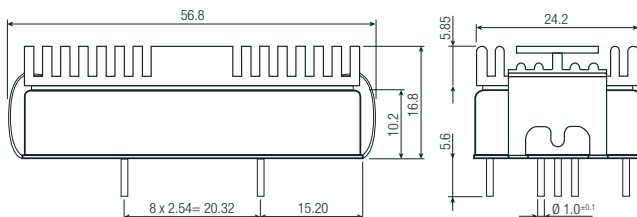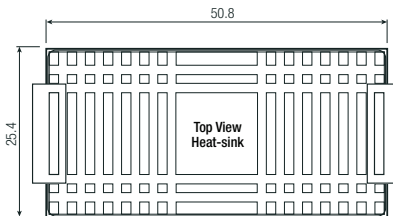

**PACKAGING INFORMATION**

Parameter	Type		Value
Packaging Dimension (LxWxH)	tube	without heat-sink	255.0 x 54.0 x 22.0mm
	tray	with heat-sink	302.5 x 222.0 x 20.0mm
Packaging Quantity	tube	without heat-sink	9pcs
	tray	with heat-sink	20pcs
Storage Temperature Range			-55°C to +125°C
Storage Humidity	non-condensing		5% - 95% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View RP10-2405SE/P/M1 on WIN SOURCE](#)
- [Recom Power Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management