



**THE DATASHEET OF
FN9222R-10-06**



General Performance IEC Inlet Filter



- Rated currents up to 20 A
- Excellent performance/size ratio
- Optional medical versions (B type) according to IEC/EN 60601-1
- Snap-in versions (S and S1 type)
- Hot inlet versions (HI type)
- Optional overvoltage protection (Z type)



Performance indicators

Attenuation performance



Rated current [A]



Technical Specifications

| | |
|--|---|
| Maximum continuous operating voltage | 250 VAC, 50/60 Hz |
| Nominal operating voltage | 230 VAC |
| Rated currents | 1 to 20 A @ 50°C |
| Operating frequency | DC to 400 Hz |
| High potential test voltage | P → N 250 VAC for 2 sec (all Z types) P → PE 2000 VAC for 2 sec (standard types) P → PE 2500 VAC for 2 sec (B types) P → N 1000 VAC for 2 sec (1 to 10 A types, not Z types) P → N 1100 VDC for 2 sec (16 and 20 A types, not Z types) P → N 1100 VDC for 2 sec (16 and 20 A types, not Z types) |
| Temperature range (operation and storage) | -25°C to +85°C (25/85/21) |
| Protection category | IP 40 according to IEC 60529 |
| Flammability corresponding to | Plastic Material: UL 94 V-0 Laces for -07 version: UL 94 VW-1 |
| Approvals by rated current | 1 to 10 A (ENEC, CQC) 16 A (ENEC, CQC) for 16 and 20 A types 1 to 20 A (UL, CSA) |
| Design corresponding to | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939 (X to XX A, not Z types) |
| MTBF (Mil-HB-217F) | ≤15 A: >3,040,000 h @ 50°C/230 V ≥16 A: >2,256,000 h @ 50°C/230 V |

Approvals & Compliances



(CQC except HI-types)

The FN 9222 IEC inlet filter combines an IEC inlet and mains filter with excellent filter attenuation in a small form factor. Choosing the FN 9222 product line brings you the rapid availability of a standard filter associated with the necessary safety acceptances. Standard IEC connector filters are a practical solution helping you to pass EMI system approval in a short time. A wide selection on amperage ratings, output connections, mounting possibilities and filters for medical applications are designed to offer you the desired solution.



Features and Benefits

- Exceptional conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior
- Rear/front or snap-in mounting
- Wide mounting flanges available
- FN 9222 B versions comply with the requirements of 1MOP acc. to IEC/EN 60601-1 for creepage and clearance, leakage current and high potential testing
- 12 and 15 A types with hot inlet available
- Optional surge pulse protection
- Different output connections offering maximum flexibility for assembly
- Custom-specific versions are available on request

Typical Applications

- Portable electrical and electronic equipment
- Small to medium-sized machines and household equipment
- Single-phase power supplies, switch-mode power supplies
- Test and measurement equipment
- Medical equipment
- Rack mounting equipment

Filter Selection Table

| Filter | Rated current @ 50°C (25°C) | Leakage current* @ 250 VAC/50 Hz (@ 120 VAC/60 Hz) | Inductance L | Capacitance | | Resistance R | Output connections | | Weight |
|------------------|--------------------------------|--|-----------------|-------------|------|-----------------|---|---|--------|
| | | | | Cx | Cy | | | | |
| | [A] | [mA] | [mH] | [µF] | [nF] | [kΩ] |  |  | [g] |
| FN9222x-1-.. | 1 (1.2) | 0.31 (0.18) | 12 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-3-.. | 3 (3.5) | 0.31 (0.18) | 2.5 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-6-.. | 6 (7.2) | 0.31 (0.18) | 0.78 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-8-.. | 8 (10.6) | 0.31 (0.18) | 0.5 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-10-.. | 10 (11.6) | 0.31 (0.18) | 0.225 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-12-.. | 12 (12) | 0.31 (0.18) | 0.11 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-15-.. | 15 (15) | 0.31 (0.18) | 0.075 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-12-..HI | 12 (12) | 0.31 (0.18) | 0.11 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222x-15-..HI | 15 (15) | 0.31 (0.18) | 0.075 | 0.1 | 2.2 | | -06 | -07 | 40 |
| FN9222xR-1-.. | 1 (1.2) | 0.31 (0.18) | 12 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-3-.. | 3 (3.5) | 0.31 (0.18) | 2.5 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-6-.. | 6 (7.2) | 0.31 (0.18) | 0.78 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-8-.. | 8 (10.6) | 0.31 (0.18) | 0.5 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-10-.. | 10 (11.6) | 0.31 (0.18) | 0.225 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-12-.. | 12 (12) | 0.31 (0.18) | 0.11 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-15-.. | 15 (15) | 0.31 (0.18) | 0.075 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222R-16-06 | 16 (18.5) | 0.31 (0.18) | 0.54 | 0.33 | 2.2 | 1000 | -06 | | 100 |
| FN9222R-20-06 | 20 (23) | 0.31 (0.18) | 0.4 | 0.33 | 2.2 | 1000 | -06 | | 100 |
| FN9222xR-12-..HI | 12 (12) | 0.31 (0.18) | 0.11 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xR-15-..HI | 15 (15) | 0.31 (0.18) | 0.075 | 0.1 | 2.2 | 1000 | -06 | -07 | 40 |
| FN9222xB-1-.. | 1 (1.2) | 0.00 | 12 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-3-.. | 3 (3.5) | 0.00 | 2.5 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-6-.. | 6 (7.2) | 0.00 | 0.78 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-8-.. | 8 (10.6) | 0.00 | 0.5 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-10-.. | 10 (11.6) | 0.00 | 0.225 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-12-.. | 12 (12) | 0.00 | 0.11 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-15-.. | 15 (15) | 0.00 | 0.075 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222RB-16-06 | 16 (18.5) | 0.00 | 0.54 | 0.33 | | 1000 | -06 | | 100 |
| FN9222RB-20-06 | 20 (23) | 0.00 | 0.4 | 0.33 | | 1000 | -06 | | 100 |
| FN9222xB-12-..HI | 12 (12) | 0.00 | 0.11 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222xB-15-..HI | 15 (15) | 0.00 | 0.075 | 0.1 | | 1000 | -06 | -07 | 40 |
| FN9222UZ-1-06 | 1 (1.2) | 0.31 (0.18) | 12 | 0.1 | 2.2 | | -06 | | 43 |
| FN9222UZ-3-06 | 3 (3.5) | 0.31 (0.18) | 2.5 | 0.1 | 2.2 | | -06 | | 43 |
| FN9222UZ-6-06 | 6 (7.2) | 0.31 (0.18) | 0.78 | 0.1 | 2.2 | | -06 | | 43 |
| FN9222UZ-8-06 | 8 (10.6) | 0.31 (0.18) | 0.5 | 0.1 | 2.2 | | -06 | | 43 |
| FN9222UZ-10-06 | 10 (11.6) | 0.31 (0.18) | 0.225 | 0.1 | 2.2 | | -06 | | 43 |
| FN9222UZ-12-06 | 12 (12) | 0.31 (0.18) | 0.11 | 0.1 | 2.2 | | -06 | | 43 |
| FN9222UZ-15-06 | 15 (15) | 0.31 (0.18) | 0.075 | 0.1 | 2.2 | | -06 | | 43 |

* Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

Product selector

FN 9222xx-yy-..HI-zz

- Snap-in range for S version only
- Blank: Snap-in range 0.7 to 1.5mm
- 20: Snap-in range 1.5 to 2.2mm

- Blank: Standard IEC inlet type C14 (1 to 15A types), C20 (16 and 20A types)
- HI: Hot IEC inlet type C16 (12 and 15A types only)

- 06: Faston 6.3 x 0.8mm (spade/soldering)
- 07: Wire leads


- 1 to 20: Rated current

- Blank: Standard version
- R: Bleed resistor
- B: Medical version (with bleed resistor and without Y2-capacitor)
- Z: Optional surge pulse protection with additional varistor (MOV)
(Z types have longer housings, only available for FN 9222UZ-yy-06)


- Blank: Standard housing with mounting flanges
- U: Housing with wider mounting flanges
- S: Snap-in version, snapper on vertical side (1 to 15A types only)
- S1: Snap-in version, snapper on horizontal side (1 to 15A types only)

Typical electrical schematic

Standard, R and B types

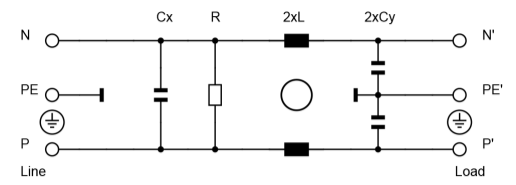

Z types

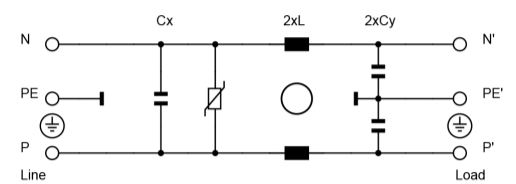

For example: FN 9222 E-15-06, FN 9222 ES1B-10-06-20, FN 9222 ER-12-06HI, FN 9222 EUB-8-06-20

Distributor Inventory

Check stock levels at global distributors at <https://products.schaffner.com/stock>
(Also available via the QR code)

Stock level per types 1 - 15 A

- Standard housing types
- Housing with wider mounting flanges (U)
- Snap-in housing types (S&S1)
- Medical versions (B)
- Bleed resistor types (R)
- Surge protection types (UZ)

Link



Typical Filter Attenuation





Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym

1 and 3 A types







6 to 10 A types

12 and 15 A types

16 and 20 A types

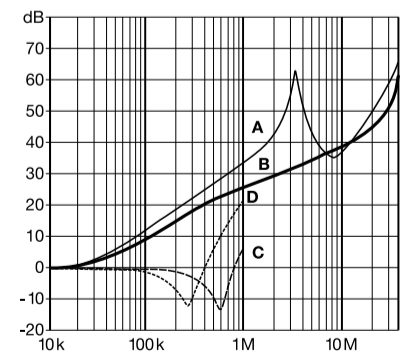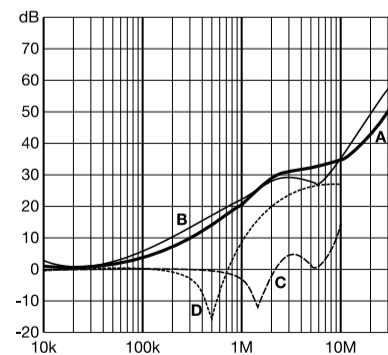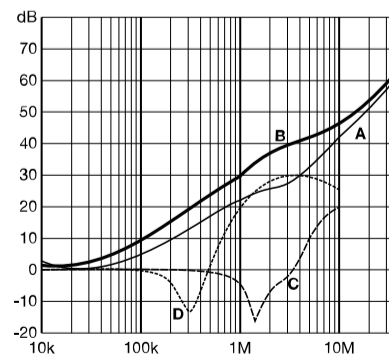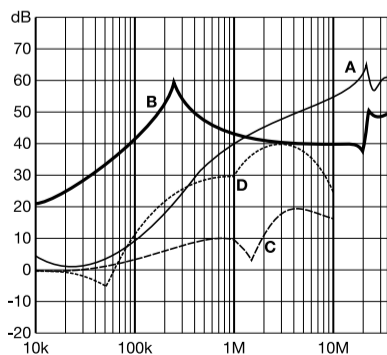




Mechanical Data

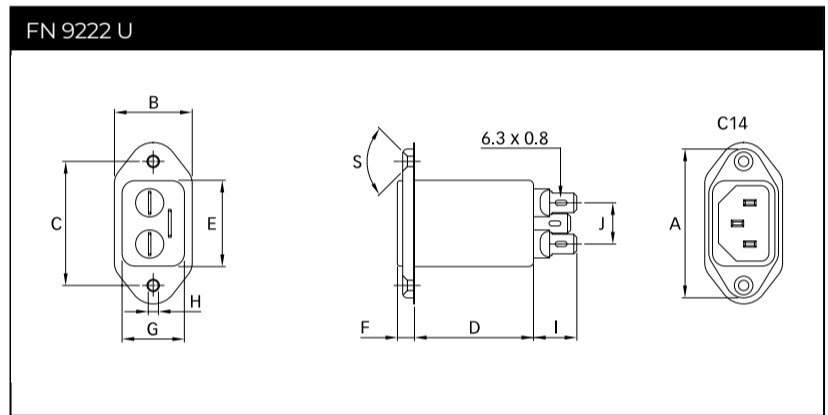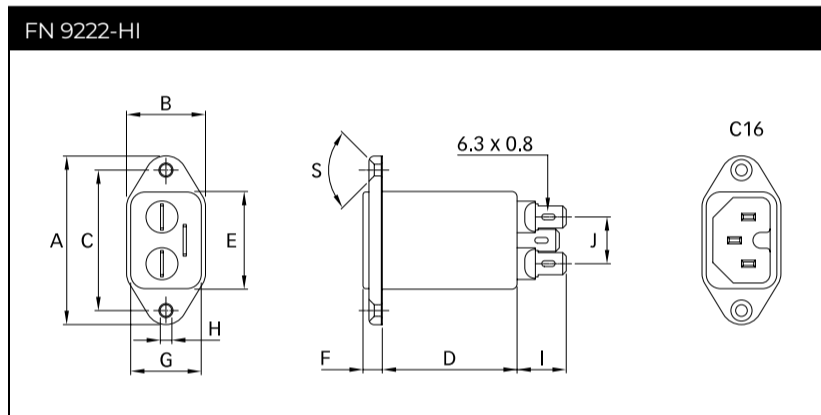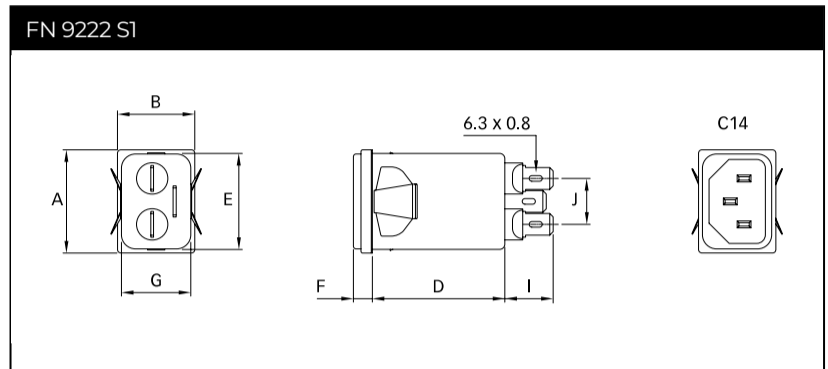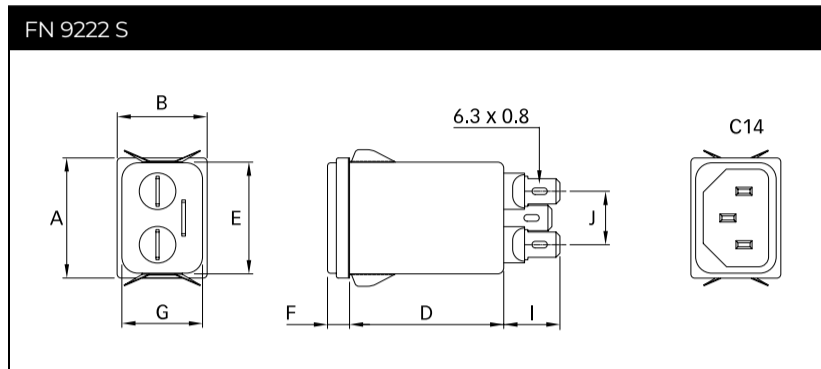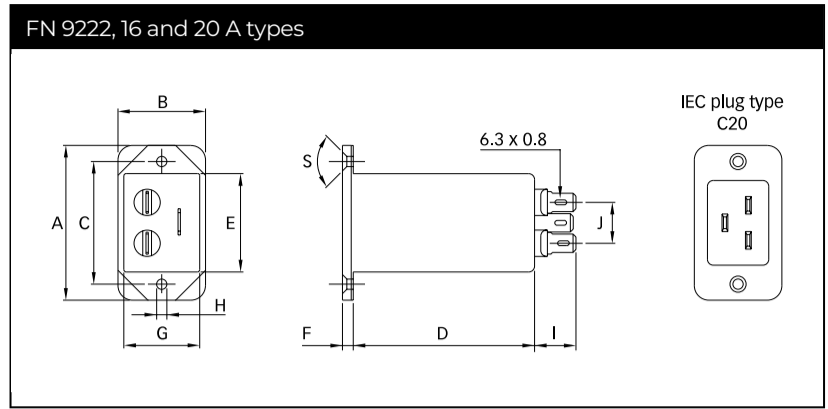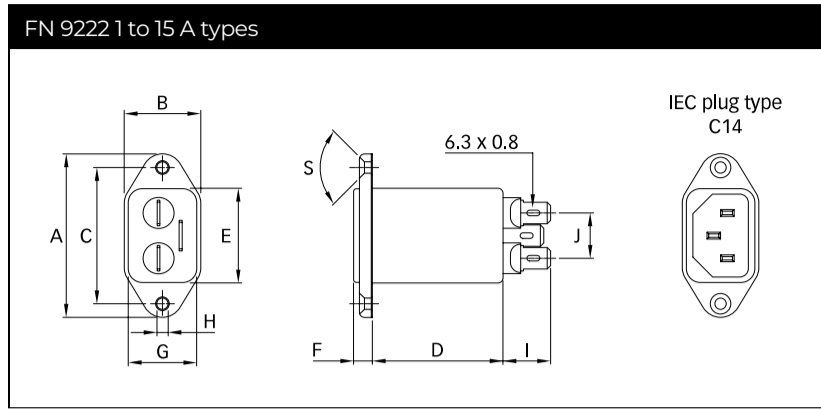

-07 connection style

Panel cut out

Installation

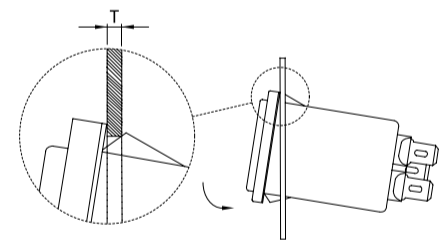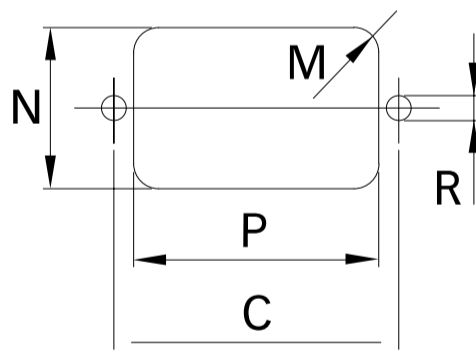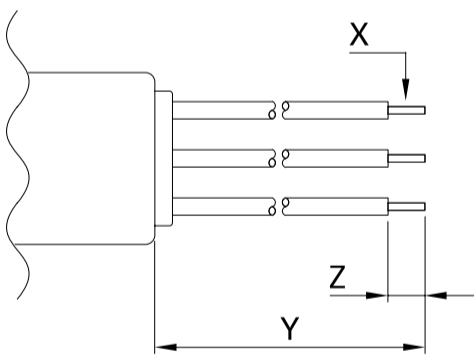

Dimensions

| | FN 9222 1 to 8 A | 10 to 15 A | 16 and 20 A | FN 9222 U | FN 9222 UZ | FN 9222 S 1 to 8 A | 10 to 15 A | FN 9222 S1 1 to 8 A | 10 to 15 A | FN 9222-HI 12 and 15 A | Tol. |
|------------|-----------------------------|-------------------|--------------------|------------------|-------------------|-------------------------------|-------------------|--------------------------------|-------------------|-----------------------------------|-------------|
| A | 48 | 48 | 53 | 51.85 | 51.85 | 29.9 | 29.9 | 29.9 | 29.9 | 48 | |
| B | 22.4 | 22.4 | 30 | 25 | 25 | 22.4 | 22.4 | 22.4 | 22.4 | 22.4 | |
| C | 40 | 40 | 42 | 40 | 40 | | | | | 40 | ±0.2 |
| D | 38.25 | 38.25 | 62 | 38.25 | 47.1 | 38.25 | 38.25 | 38.25 | 38.25 | 38.25 | |
| E | 27.8 | 27.8 | 34.5 | 27.7 | 27.7 | 27.8 | 27.8 | 27.8 | 27.8 | 27.8 | +0.6/-0 |
| F | 5.7 | 5.7 | 3.8 | 5.7 | 5.7 | 5.7 | 5.7 | 5.7 | 5.7 | 5.7 | |
| G | 20.1 | 20.1 | 26.5 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | 20.1 | +0.6/-0 |
| H | Ø3.3 | Ø3.3 | Ø3.5 | Ø3.3 | Ø3.3 | | | | | Ø3.3 | |
| I | 14 | 14 | 14 | 14 | 14 | 14 | 14 | 14 | 14 | 14 | |
| J | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | 13.3 | |
| M | R 3 | R ≤3 | R ≤1.5 | R ≤3 | R ≤3 | R ≤1.5 | R ≤ 1.5 | R ≤1.5 | R ≤1.5 | R ≤3 | |
| N | 21.5 | 21.5 | 27 | 21.5 | 21.5 | 20.8 | 20.8 | 21.9 | 21.9 | 21.5 | |
| P | 28.5 | 28.5 | 34.7 | 28.5 | 28.5 | 29.4 | 29.4 | 28.5 | 28.5 | 28.5 | |
| R* | M3 | M3 | M3 | M3 | M3 | | | | | M3 | |
| S | 90° | 90° | 90° | 90° | 90° | | | | | 90° | |
| T** | | | | | | 0.7-1.5 | 0.7-1.5 | 0.7-1.5 | 0.7-1.5 | | |
| T** | | | | | | 1.5-2.2 | 1.5-2.2 | 1.5-2.2 | 1.5-2.2 | | |
| X | AWG 18 | AWG 16 | | | | AWG 18 | AWG 16 | AWG 18 | AWG 16 | AWG 16 | |
| Y | 160 | 160 | | | | 160 | 160 | 160 | 160 | 160 | |
| Z | 6 | 6 | | | | 6 | 6 | 6 | 6 | 6 | |

* Recommended torque for M3 (90° countersunk flat head) is 0.5 Nm

** For selecting the panel thickness, please refer to the filter selector table.

All dimensions in mm; 1 inch = 25.4 mm

Tolerances according: ISO 2768-m/EN 22768-m

Please visit www.schaffner.com to find more details on filter connectors.

Accessories

IL 13P IEC C13 Rewireable Connectors with Locking System



The locking system has a tensile force of typical 300N. It is recommended to use it with flange mount filters. For details refer to our Application Note "Using IEC Lock Power Cords with IEC Inlets and Filters".

Schaffner power connector with IEC lock guard against accidental disconnection of all electrical appliances with an IEC inlet. No exchange or modification of the IEC inlet or IEC inlet filter system is needed. Easy retrofit .for all electronic equipments and devices

[Technical Data Sheet >](#)

IL 13P IEC C13 Rewireable Angled Connectors with Locking System



- Protects appliances that are vulnerable to vibration
- Connector cannot be accidentally pulled or vibrated out of the inlet
- Space availability/constraints
- Different angles for ease of access
- Space saving
- Release locking mechanism
- Prevents accidental disconnection

[Technical Data Sheet >](#)

Power Cord with angled Locking System C13



- Protects appliances that are vulnerable to vibration
- Connector cannot be accidentally pulled or vibrated out of the inlet
- Space availability/constraints
- Different angles for ease of access
- Space saving
- Release locking mechanism
- Prevents accidental disconnection

[Technical Data Sheet >](#)

Headquarters, Global Innovation and Development

Switzerland
Schaffner Group
 Industrie Nord
 Nordstrasse 11e
 4542
 Luterbach
 +41 32 681 66 26
info@schaffner.com

Sales and Application Centers

Finland
Schaffner Oy
 Lohjanharjuntie 1109
 08500
 Lohja
 + 358 50 468 72 84
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
 16-20 Rue Louis Rameau
 95875
 Bezons
 +33 1 34 34 30 60
francesales@schaffner.com

Germany
Schaffner Deutschland GmbH
 Ohiostr. 8
 76149
 Karlsruhe
 +49 721 56910
germanysales@schaffner.com

Italy
Schaffner EMC S.r.l.
 Via Ticino, 30
 20900
 Monza (MB)
 +39 039 21 41 070
italysales@schaffner.com

Japan
Schaffner EMC K.K.
 ISM Sangenjaya 7F
 1-32-12 Kamiyama Setagaya-ku
 154-0011
 Tokyo
 +81 3 5712 3650
japansales@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
 Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
 Industrial Estate
 408705
 Singapore
 +65 63773283
singaporesales@schaffner.com

Sweden
Schaffner EMC AB
 Östermalmströgrg 1
 114 42
 Stockholm
 +46 8 5050 2425
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
 Industrie Nord
 Nordstrasse 11e
 4542
 Luterbach
 +41 32 681 66 26
switzerlandsales@schaffner.com

India
Schaffner India Pvt. Ltd
 Regus World Trade Centre
 WTC 22nd Floor Unit No 2238 Brigade
 Gateway Campus 26/1 Dr. Rajkumar Road
 Malleshwaram (W)
 560055
 Bangalore
 +91 8067935355
indiasales@schaffner.com

United Kingdom
Schaffner Ltd.
 Suite 1 Oakmede Place
 Terrace Road
 RG42 4JF
 Binfield
 +44 118 9770070
uksales@schaffner.com

United States
Schaffner EMC Inc.
 52 Mayfield Avenue
 Edison, New Jersey
 +1 732 225 9533
usasales@schaffner.com

To find your local partner within
 Schaffner's global network schaffner.com

© 2024 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View FN9222R-10-06 on WIN SOURCE](#)
- [Schaffner EMC Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management